

Biofuels for Internal Combustion Engine

Subjects: [Energy & Fuels](#)

Contributor: Daramy Kallon

Biofuel, a cost-effective, safe, and environmentally benign fuel produced from renewable sources, has been accepted as a sustainable replacement and a panacea for the damaging effects of the exploration for and consumption of fossil-based fuels.

biofuel

biodiesel

emission

feedstock

utilization

transesterification

transportation

1. Biofuel as a Renewable Fuel

Since the early 1970s, when the word “biofuel” was first used, authors have defined the term as: (a) a fuel manufactured either from or by fresh, living micro- or macro-organisms ^[1]; (b) a fuel made directly or indirectly from biomass ^[2]; (c) a liquid fuel obtained from biomass, e.g., biodiesel produced from fats and oils, biogas generated from animal waste, etc. ^[3]; (d) a bio-based fuel naturally obtained from wood and wood chips or agricultural residues or chemically converted from biomass to charcoal, biodiesel, bioethanol, and biomethane ^[4]. Using these definitions, we can summarize that biofuel is generated from plants, animal waste, manure, sludge, etc., in either a solid, liquid, or gaseous form, and is capable of being converted to another variety of biofuel ^[5]. Major benefits and paybacks derivable from the deployment of biofuels as a form of renewable fuel include:

- Biofuels are renewable and are carbon- and CO₂/GHG-neutral during the progression of the life cycle ^[6].
- Less GHG emissions are generated from the utilization of biofuels compared to FB fuels ^{[7][8]}.
- Biofuels are biodegradable, sustainable, and environmentally benign ^{[9][10]}.
- Biofuels are largely produced from locally available and accessible resources, applying safe production methods ^{[11][12]}.
- Production and utilization of biofuels enhance home-grown agricultural development and investment ^{[13][14]}.
- Biofuels provide improvements in the health and living conditions of people ^{[13][14]}.
- Biofuels create jobs and improvements in local livelihoods and reduce energy importations ^{[15][16]}.

- Economically, biofuel helps to stabilize energy prices, conserve foreign exchange, and generate employment at the macroeconomic level [17][18].
- Household usage of biofuel does not trigger life-threatening health conditions, as opposed to FB fuels [19][20].

Notwithstanding these advantages, the high initial cost of production and storage of biofuels can be a deterrent for potential producers and users. There are justifiable concerns that the increased demand for biofuel will increase the cost of the relevant agricultural and woody raw materials, as well as other feedstocks [21][22]. Also, continuous demand for wood can lead to rapid deforestation, while huge parcels of land are required to cultivate special trees and other inedible oils for biofuel production. In specific terms, methane, a major component of biogas, is a major contributor to global climate change and continuous usage of biogas can exacerbate ozone layer depletion [23], while biodiesel, a form of biofuel, generates high NOx emission and contributes to higher engine wear compared to FB fuel [24]. Despite the obstacles, biofuel is a clean, sustainable, and affordable energy resource choice that can replace FB fuels and rescue humankind from the looming environmental disaster. The adaptation of biofuels as sustainable fuels in various sectors of the economy is one of the strategies for CO2 reduction and carbon mitigation [25][26].

2.1. Classification of Biofuels

2.1.1. Classification Based on the Physical State

Solid Biofuels

Generally, any solid biomass material can be described as solid biofuel. Solid biomass is principally any solid feedstock that can be converted into biofuel [27]. Examples of such solid biomass include lignocellulosic biomass and various types of solid waste [28]. **Table 1** shows various categories of solid biofuel and their examples. Ideally, each of these raw solid biomasses can be used directly as solid biofuels or as feedstock for other forms of biofuel production.

Table 1. Categories and examples of solid biofuel [29][30][31][32][33].

Lignocellulosic Biomass			Solid Waste
Agricultural Residues	Forest Residues	Energy Crops	
Rice straw	Firewoods	Switchgrass	Municipal solid waste
Rice husk	Wood chips	Miscanthus	Processed paper
Wheat straw	Wood branches	Energy cane grass	Plastics
Sorghum straw	Sawdust	Hybrid Pennisetum	Wastewater sludge
Corn stover	Fruit bunch	Triarrhena lutarioriparia	Food waste
Sugarcane bagasse	Willow chips	Energy cane leaf	Dried animal manure
Sugarcane peel	Black locust	Energy cane stem	Poultry waste
Barley straw	Pine	Grass leaf	
Olive pulp	Spruce	Grass stem	
Grapeseed	Eucalyptus		
	Softwood		

Lignocellulosic Biomass			Energy Crops	Solid Waste
Agricultural Residues	Forest Residues			
	Hardwood Hybrid poplar			

Compiled by the authors.

Liquid Biofuels

Liquid biofuels refer to any renewable fuel in liquid form. They are mainly used as transport fuels. Notable examples of liquid biofuels are biodiesel, biomethanol, bioethanol, biobutanol, biopropanol, bio-oil, jet fuel, etc. [34][35][36].

Gaseous Biofuels

Biogas/biomethane, biohydrogen, and biosyngas are the commonest examples of gaseous biofuels. They have a wide variety of applications, including for thermal, transport, and heat uses and electricity/power generation.

2.1.2. Classification Based on Technology Maturity

According to the degree of technology maturity or status of the commercialization technologies, biofuels are often categorized as conventional biofuels and advanced biofuels, as shown in Figure 1.

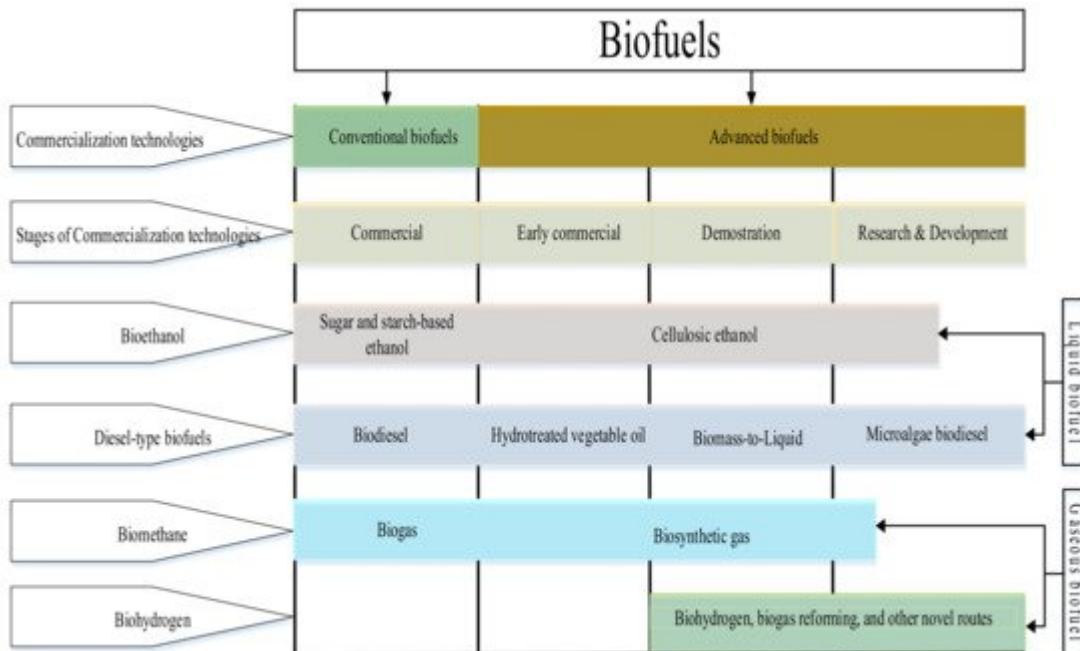


Figure 1. Classification of biofuels based on technology maturity. Adapted from [37]. Developed by the authors.

2.1.3. Classification Based on the Generation of Feedstock

Feedstocks for biofuel production are divided into three categories in terms of their generation: first-generation feedstock, second-generation feedstock, and third-generation feedstock. The choice of feedstock has a huge influence on the development and utilization of biofuel as a substitute for FB fuels. Feedstocks are chosen based on price, hydrocarbon content, and biodegradability. For example, edible feedstocks and those containing pure sugars are relatively expensive. Simple sugars are preferred as feedstocks because they are easy to decompose with microbes while lignocellulosic biomasses are selected based on their relative affordability.

2.1.4. Classification Based on the Generation of Products

Primary Biofuels

The main feature of primary biofuels, also known as natural biofuel ^[38] or zero-generation biofuel, is that they are used the way they occur without any modifications, alterations, processing, or pre-treatment. Examples of primary biofuels include firewood, wood chips, pellets, animal waste, forest and crop residues, and landfill gas. Notable areas of application of primary biofuels include cooking, household heating, brick kilns, drying, roasting, and electricity generation. This type of biofuel is readily available and its utilization does not require any special skill or infrastructure. However, their utilization is crude, compromises air quality, and may negatively impact the health of the user ^{[39][40]}.

First-Generation Biofuels

The need to get a sustainable and viable alternative to finite energy sources gave rise to the development of First Generation Biofuels (1GB). Major examples include biodiesel, biogas, bioalcohols, biosyngas, biomethanol, and bioethanol. Major feedstocks for the production of 1GB include edible (food) crops like corn, wheat, palm oil, soybeans, edible vegetable oil ^[41], rapeseed, Karanja, Moringa oleifera, Jatropha curcas ^[42], corn, cereals, sugar cane, wood, grains, straw, charcoal, household waste, and dried manure ^[43]. Though 1GB is biodegradable and offers great environmental and social benefits, the food vs. fuel trade-off and extensive area and time required to grow the inedible feedstock are some of its drawbacks ^[44]. Also, the high cost of feedstock, which was found to consume over 70% of the generation cost, is discouraging ^{[45][46][47]}.

Second-Generation Biofuels

Second-Generation Biofuels (2GB), which were developed as a solution to some of the drawbacks associated with 1GB, can be produced from inedible feedstocks like waste cooking oil ^[48], waste animal fats ^[49], recovered oil ^[50], and lignocellulosic biomass, like grass, wood, sugarcane bagasse, agricultural residues, forest residues, and municipal solid waste ^{[51][52]}, as well as from bioethanol, biodiesel, biosyngas, biomass to liquid biodiesel conversion, bio-oil, biohydrogen, bioalcohols, biodimethylfuran, and bio-Fischer–Tropsch ^{[53][54]}. The generation of 2GB does not affect the food chain and the cost of feedstocks is relatively low, but the production technologies are still complex and have not been commercialized yet ^{[55][56]}.

Third-Generation Biofuels

The challenges associated with 1GB and the 2GB gave rise to the development of the Third Generation Biofuels (3GB), particularly with regard to feedstock selection. Algae, which is the major feedstock for 3GB, does not interfere with the food chain and requires no land or freshwater for cultivation, either naturally or artificially [57]. Other feedstocks for 3GB include yeast, fungi, and cyanobacteria, while examples of 3GB include bioethanol, vegetable oil, biodiesel, biomethanol, and jet fuels. In recent years, 3GB has attracted more investment, particularly in algae cultivation and conversion technologies [58].

Fourth-Generation Biofuels

Fourth Generation Biofuels (4GB) are produced from genetically or metabolically engineered feedstock from algae. Unlike 2GB and 3GB, the production of this generation of biofuels ensures sustainable production and catches CO₂ emissions from oxygenated fuel combustion throughout the entire production progression [59]. The application of production technologies has drastically reduced the cost of production, making it economically competitive. Major examples of 4GB include hydrogenated renewable diesel, bio-gasoline, green aviation fuel, vegetable oil, and biodiesel.

2. Biofuel as Internal Combustion Engine Fuels

Transportation is one of the necessities of life and a major contributor to the socio-economic growth of countries. The ease of the movement of goods and services is one of the measures of the quality of life of individuals. Governments across jurisdictions devote significant efforts and resources to ensure affordable and safe transportation services. The transportation sector consumes over 90% of the total FB fuel products and over 25% of global energy [60][61]. The proportion of the total energy used for on-road transport is projected to increase from the present 28% to 50% by 2030 and further to 80% by 2050 [62]. The total energy consumption in the transport sector was 110 million TJ in 2015 including passenger vehicles (cars and bikes), buses, air, passenger rail, and air freight. Heavy trucks, light trucks, and marine transport jointly consume 35% of the transportation sector energy, as shown in **Figure 2** [63][64]. The 129 billion liters of liquid biofuel used in 2016 is projected to rise to 652 billion liters by 2050, while about 180 billion liters of biodiesel will be needed in the transport sector in 2050, as shown in **Figure 3** [65].

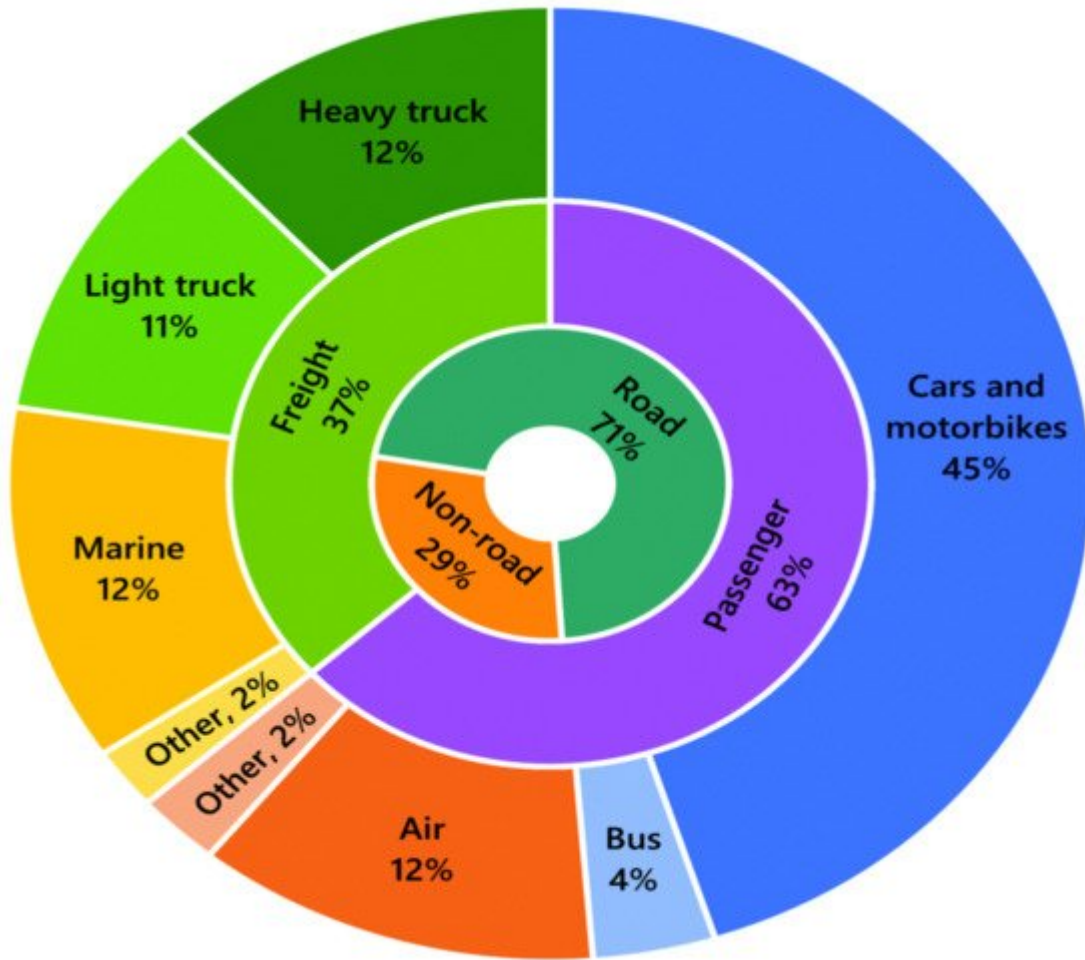


Figure 2. Summary of global energy utilization in the transport sector in 2015 [63][64].

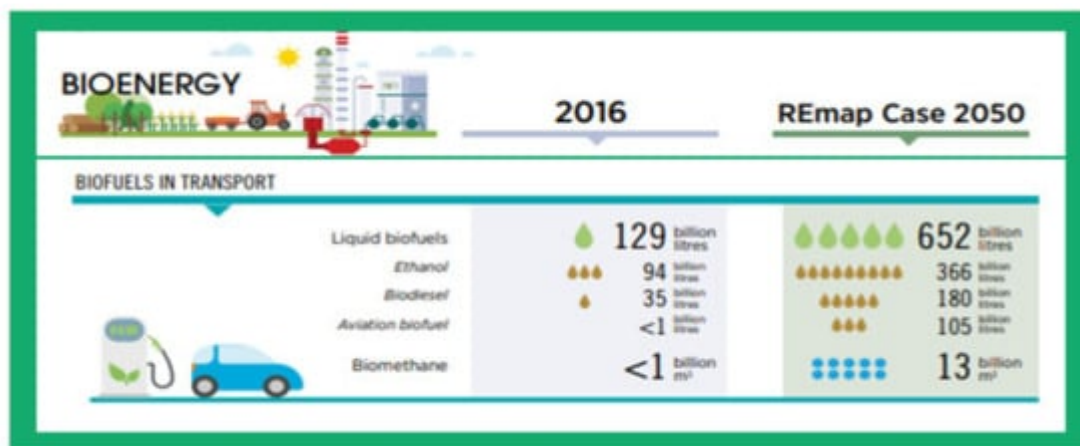


Figure 3. Biofuel in the transport sector, 2016 and 2050 scenarios. Adapted from [65]. Developed by the authors.

Liquid and gaseous biofuels are used to power ICEs. However, liquid biofuels are preferred over gaseous biofuels for vehicle propulsion. This is because liquid biofuels have a higher energy density than gaseous fuels, thereby allowing vehicles to possess immense range. **Table 2** shows the energy stored per liter for petrol or Petroleum-Based Gasoline (PBG) fuel, PBD fuel, and some biofuels. Gaseous fuels require pressurized tanks and they must

be larger for an equal quantity of stored energy compared to liquid fuels. Also, refueling is more straightforward, easier, and faster with liquid fuels than gaseous fuels.

Table 2. Energy stored per liter of fuel [66].

Fuel	Stored Energy (MJ)
Diesel	36
Gasoline	33
Biodiesel	33
Methanol	16
Ethanol	21
Liquid H ₂ (at -253 °C)	8.5
Compressed H ₂ (at 250 bar)	2.5

The use of a fuel as an ICE fuel depends on its properties. **Table 3** shows some properties of diesel, gasoline, and some liquid and gaseous biofuels. The density is calculated as the mass per unit volume. The density of a fuel is determined by the mass of fuel entering the combustion chamber and the air/fuel ratio. A Higher Heating Value (HHV) is the quantity of heat realized when a unit amount of fuel is completely combusted. HHV is obtained by cooling the products of combustion, leading to the formation of water vapor [67][68]. The HHV of fuel is directly proportional to the quantity of carbon in the fuel and the ratio of C-H to O₂-N₂. Conversely, the Lower Heating Value (LHV) of a fuel is the energy content of the fuel. The distinction between the HHV and LHV is a measure of the heat content of the condensed water vapor formed during combustion. The density and heating values determine the energy available in the fuel, along with the volume and mass. The Cetane Number (CN) is a function of the amount of time lag between the fuel injection and auto-ignition [67]. The CN is used to classify PBD fuel and measures the ability of the fuel to self-ignite. Fuels with high CNs are good for CI engines because this ensures that the engine enjoys an excellent start and runs smoothly, particularly during cold weather. A low CN tends to result in incomplete combustion and exacerbates the emission of dangerous gases [69].

Kinematic viscosity is a property that influences the atomization properties, the size of the droplets and spray penetration, and the potential of atomized fuel. Fuels with high kinematic viscosity values suffer from poor fuel atomization during the spray and increased wear rate of the engine, pump parts, and injectors, which jointly result in poor combustion and increased emissions [70]. Ethanol and dimethyl ether have lower viscosity values and are more capable of making fine droplet sprays than PBD fuel. The flash point measures the temperature at which sufficient water vapor is released to generate the appropriate quantity of the water vapor–air mixture and relates to the safe handling and transportation of the fuel. A fuel with a flashpoint below 38 °C (100 °F) is considered flammable [71]. The latent heat of vaporization quantifies the degree of coolness experienced as a result of fuel evaporation. The stoichiometric Air/Fuel ratio (A/F) of a fuel is a measure of the hydrogen/carbon ratio of the fuel

and the quantity of oxygen contained in the compound [72]. The Research Octane Number (RON) is also used to classify PBG fuel and measures the ability of the fuel to self-ignite. High RONs are good for spark ignition (SI) engines [73]. The Reid vapor pressure is also a critical fuel fingerprint for measuring the behavior of fuel, particularly when the SI engine is appropriately carbureted and fueled. The ease with which the spark ignites the air/fuel mixture indicates the flammability limit of the fuel. Hydrogen fuel, a form of renewable fuel, is reputed to possess the highest flammability limit.

Table 3. Physical and chemical properties of some transportation fuels [66][74][75][76][77].

Property	PBG	PBD	Methanol	Ethanol	DME	Biogas	Hydrogen	Biodiesel	F-T Diesel
Chemical formula	C _n H _{1.87n}	C _n H _{1.8n}	CH ₃ OH	C ₂ H ₅ OH	CH ₃ OCH ₃	CH ₄	H ₂	C ₁₅ H ₃₁ CO ₂ CH ₃	C ₉ to C ₂₀
Density (kg/m ³)	720–780	820–870	800	790	667	-	70	850–885	774–782
Kinetic viscosity at 40 °C (cSt)	0.7	2.0–3.5	0.75	1.5	0.18	-	-	4.43	2–4.5
Cetane number	13–17	45–55	5	8	55–60	-	-	45–65	72
Self-ignition temperature (°C)	260 ^a	210 ^a	470	365	320	580	500	220	315
Lower heating value (MJ/kg)	44	43	19.7	28.6	28.2	24	120	37	43.5 _a
Lower heating value (liquid) (MJ/L)	33	36	16	21	19	-	8.5	33	-
Higher heating value (mixture) (kJ/kg)	3.8	3.9	3.5	-	3.4	3.1	2.0	-	-
Adiabatic temperature (°C)	1995	-	1950	1965	2020	1954	2510	2000	-
Boiling temperature (°C)	25–210	180–360	65	78	-25	-162	-253	250–350	157.6

Property	PBG	PBD	Methanol	Ethanol	DME	Biogas	Hydrogen	Biodiesel	F-T Diesel
Reid vapor pressure at 38 °C (kPa)	55–100	<1.5	32	16	800	-	-	-	-
Stoichiometric A/F ratio	14.5 ^a	14 ^a	6.4	9.0	9.0	17	34.1	13 ^a	15
Research octane number	98	-	115	110	-	120	106	-	-
Enthalpy of vaporization (kJ/kg)	350 ^a	270 ^a	1100	900	375	510	455	-	-
Flammability limit (% vol.)	1.3–8	0.6–8	7–36	4.3–19	3.4–19	-	4–75	-	-
Flash point (°C)	-40	60–80	11	12	-41	-	-	62	500
Oxygen content (wt.%)	-	-	50	35	34.8	-	-	10.7	-
Carbon content (wt.%)	-	-	-	-	52.2	-	-	76.9	86.44
Hydrogen content (wt.%)	-	-	-	-	13	-	-	12.4	13.56

, 66,

221–227.

3. Schulte, L.A.; Ontl, T.A.; Larsen, G.L. Biofuels and biodiversity, wildlife habitat restoration. In Encyclopedia of Biodiversity, 2nd ed.; Levin, S.A., Ed.; Academic Press: Waltham, MA, USA, 2013; pp. 540–551.

4. Cruz, C.H.B.; Souza, G.M.; Cortez, L.A.B. Biofuels for Transport. In Future Energy; Letcher, T.M., Ed.; Elsevier: London, UK, 2014; pp. 215–244.

2.1 Utilization of Biofuels in Spark Ignition Engines

S. Kuan, K.; Zhang, Y.; Chen, P.; Liu, S.; Fan, L.; Zhou, J.; Ding, K.; Peng, P.; Addy, M.; Cheng, Y.; et al. Biofuels: Introduction. In Biofuels: Alternative Feedstocks and Conversion Processes for the Production of Liquid and Gaseous Biofuels, 2nd ed.; Pandey, A., Larroche, C., Dussap, C.G., Gnansounou, E., Khanal, S.K., Ricke, S., Eds.; Academic Press: Waltham, MA, USA, 2019; pp. 3–43. Generally, for a particular fuel to be suitable as a renewable alternative fuel for SI engine applications, it must meet the requirements for the octane number, flammability, combustion stability, the heating value of the air–fuel mixture, the laminar burning velocity, vapor pressure, the boiling curve, and volatility [78]. Against this backdrop, alternative fuels for SI engines can be categorized as either liquid biofuels or gaseous biofuels. Liquid biofuels include

6. Janampelli, S.; Datta, S. Hydrodeoxygenation of vegetable oils and fatty acids over different group VIII metal catalysts for producing biofuels. Catal. Surv. Asia 2019, 20, 90–101. Bioethanol (methanol, ethanol, butanol) and gaseous biofuels include biogas and hydrogen. These are the preferred renewable alternatives to replace PBG fuel because of their advantages [79], which include: (i) higher

7. Wu, B.; Bai, X.; Liu, W.; Lin, S.; Liu, S.; Luo, L.; Guo, Z.; Zhao, S.; Lv, Y.; Zhu, C.; et al. Non-negligible stack emissions of non-criteria air pollutants from coal-fired power plants in China. has a higher latent heat of vaporization compared to PBG fuels, and alcohol fuels (oxygenated fuels) have (i) high condensable particulate matter and sulfur trioxide. Environ. Sci. Technol. 2020, 54, 6540–6550.

8. Appavur, P.; Ramana Reddy, Jayasman, S.; Veni, B. **NO_x emission reduction techniques during filling of diesel fuel in CI engine: A review.** *Austro J. Mech. Eng.* 2021, **18**, 210–220.

9. Navas, M.B.; Ruggera, J.F.; Lick, I.D.; Casella, M.L. **A sustainable process for biodiesel alcohol fuels, lower calorific values compared to PBG fuels, resulting in lower power output, (ii) cold starting production using Zn/Mg oxidic species as active, selective and reusable heterogeneous catalysts.** *Bioresour. Bioprocess.* 2020, **7**, 4.

10. Pugazhendhi, A.; Alagumalai, A.; Mathimani, T.; Atabani, A. **Optimization, kinetic and thermodynamic studies on sustainable biodiesel production from waste cooking oil: An Indian perspective.** *Fuel* 2020, **273**, 117725.

11. Darby, H.M.; Callahan, C.W. **On-farm oil-based biodiesel production.** In *Bioenergy*; Elsevier: London, UK, 2020; pp. 157–184.

12. Smith, N. **The Creation of an Inclusive and Safe Biofuel Production Method; Research Paper; Savannah State University; Savannah, GA, USA, 2019.**

13. Yagnoubi, J.; Yazdarpahan, M.; Komendantova, N. **Iranian agriculture advisors' perception and intention toward biofuel: Green way toward energy security, rural development and climate change mitigation.** *Renew. Energy* 2019, **130**, 452–459.

14. Szabó, Z. **Can biofuel policies reduce uncertainty and increase agricultural yields through stimulating investments?** *Biofuels Bioprod. Biorefining* 2019, **13**, 1224–1233.

15. Chintala, V. **Coal versus biofuels: A social and economic assessment.** In *Second and Third Generation of Feedstocks*; Elsevier: London, UK, 2019; pp. 513–529.

16. Oyewole, S.O.; Ishola, B.; Oyewole, A.L. **Socioeconomic issues associated with campaign for large scale jatropha production to meet the anticipated biofuel demand.** *Int. J. For. Plant* 2019, **2**, 19–25.

17. Toporova, T. **Group, O. Title and type of chemical method are the important parameters that have been employed for the production of hydrogen.** *Renew. Energy* 2020, **151**, 134–140.

18. Schuenemann, F.; Kerr, W.A. **European union non-tariff barriers to imports of African biofuels.** *Agrekon* 2019, **58**, 407–425.

19. Mattige, R.A.; Tavares, D.R.; Casela, J. **The application of hydrogen as a sustainable fuel for engines has been reported by various researchers.** In *Biofuels for a More Sustainable Future*; Ren, J., Scipioni, A., Manzardo, A., Liang, H., Eds.; Elsevier: London, UK, 2020; pp. 255–271.

20. Siddiqui, M.R.; Miranda, A.; Mouradov, A. **Microalgae as bio-converters of wastewater into biofuel readily available raw materials as feedstocks. Bioethanol is produced through the fermentation of various raw and food.** In *Water Scarcity and Ways to Reduce the Impact*; Pannirselvam, M., Shu, L., Griffin, G., Philip, L., Natarajan, A., Hussain, S., Eds.; Springer: New York, NY, USA, 2019; pp. 75–94.

21. Ingle, A.P.; Ingle, B.; Gupta, J.; Rai, M. **Socioeconomic impacts of biofuel production from lignocellulosic biomass.** In *Sustainable Bioenergy*; Rais, M., Ingle, A., Eds.; Elsevier: London, UK,

2019; pp. 347–366. Sugars is a complicated procedure due to the existence of long-chain polysaccharide molecules, and it therefore demands acids or enzymes.

22. Vassilev, S.V.; Vassileva, C.G. Composition, properties and challenges of algae biomass for biofuel application: An overview. *Fuel* 2016, 181, 1–33.
- There are three types of microorganisms frequently utilized for the conversion of lignocellulosic biomass to bioethanol.
23. Meyer, K.; Keasler, M.; R. Arora. *Quantifying Agricultural GHG Emissions (Methane and Nitrous Oxide) from Biogas Production*. Accounting, Meyer, K., New South Wales, Springer, Singapore, 2020, pp. 137–145. C, pH 5.5, and with a fermentation time between 48 h and 65 h, resulting in an ethanol yield of 130.13 g/L [91], and the bacterium *Zymomonas mobilis*, operating at a temperature of 30 °C, pH 6.0, and with a fermentation time of 18 h, injection diesel engine operated with water emulsified biodiesel-diesel fuel blend. *Fuel* 2020, 273, 117779, resulting in an ethanol yield of 99.78 g/L [92], have been used for commercial production of ethanol.

2.2 Utilization of Biofuels in Compression Ignition Engines: A case of bioethanol and biodiesel production. *Energy Rep.* 2020, 6, 77–88.

Compression ignition (CI) engines have better thermal efficiency than SI engines and have found applications in diverse areas, including transportation, construction, agriculture, and power generation. The need for renewable fuel to power CI engines results from the poor performance and hazardous emissions, particularly of CO, UHC,

27. Knapczyk, N.; Franc, M.; S. Flaszek, J.; Slepki, Z. *Analysis of selection of fuels for production of solid primary fuels.* The Proceedings of the 18th International Scientific Conference “Engineering for Rural Development”, Jyotava, India, 22–24 May 2019, Latvia University of Life Sciences and Technologies, Jyotava, Latvia, 2019, pp. 1508–1509.

of the engine. Biodiesel, Fischer–Tropsch (F-T) fuel, and dimethyl ether (DME) are the preferred renewable fuels for CI engines because of their [60] higher cetane numbers and lower levels of olefins and aromatic-structured hydrocarbons compared to PBD fuels. Furthermore, biodiesel and F-T fuels have higher flash points than PBD fuels, but F-T and DME fuels have better cold flow properties than biodiesel.

29. Morato, T.; Vaezi, M.; Kumar, A. Assessment of bioenergy production potential from agricultural residues in Bolivia. *Renewable Sustainable Energy Rev.* 2019, 102, 14–23.

characteristic oxygenated fingerprints, which support complete combustion. Though the combustion, performance, and emissions characteristics of biodiesel as a CI engine fuel have been studied, the determining factors that have engaged the interest of Bioenergy in the Bioeconomy; Lago, C., Caldes, N., Lechon, Y., Eds.; Elsevier: London, UK, researchers are the improved performance and mitigated emissions characteristics of unretrofitted engines fueled with biodiesel. Over the years, biodiesel has been produced from various feedstocks, and the products have been

31. Carrasco-Diaz, G.; Perez-Verdin, G.; Escobar-Flores, J.; Marquez-Linares, M.A. A technical and economic approach to estimate forest residues as a feedstock for bioenergy in northern Mexico. *Ecosyst.* 2019, 6, 45.

tested and compared with PBD fuel using the BSFC, BTE, BP, and EGR as performance criteria and measurement of NOx, PM, and CO emissions. The ultimate goal is to make unretrofitted CI engines consume less fuel, generate more power, and emit less hazardous gases [60][93]. Biodiesel, due to its increased oxygen content, has low calorific values and consequently emits more NOx emissions and suffers from power drops.

32. Rupp, S.P.; Ribic, C.A. Second-generation feedstocks from dedicated energy crops. In *Renewable Energy and Wildlife Conservation*; Moorman, C.E., Grodsky, S.M., Rupp, S.P., Eds.; Baltimore University Press: Baltimore, MD, USA, 2019; pp. 64–66.

F-T diesel is produced through a catalytic chemical reaction where syngas derived from biomass are converted into hydrocarbons of various molecular weights. The reaction takes place at a temperature range of 200–350 °C and pressure range of 40–600 psi. The Fischer–Tropsch process is a catalytic exothermic reaction that can take place

33. Ho, D.P.; Ngo, H.H.; Guo, W. A mini review on renewable sources for biofuel. *Bioresour. Technol.* 2014, 169, 743–749.
34. Jacobson, M.Z. *Why Not Liquid Biofuels for Transportation as Part of a 100% Wind-Water-Solar (WWS) and Storage Solution to Global Warming, Air Pollution, and Energy Security.* 2020.

35. Huang, H.; Jin, Q. Industrial waste valorization: Applications to the case of liquid biofuels. *green energy to sustainability: Strategies for global industries*; Vertes, A.A., Qureshi, N., Blaschek, H.P., Yukawa, H., Eds.; John Wiley & Sons: New York, NY, USA, 2020; pp. 515–537.

36. Guo, M. The environmental benefits of biofuel production and development as a practical and sustainable bioenergy. *Renew. Sustain. Energy Rev.* 2014, 39, 24–34.

37. IEA. Technology Roadmap. Biofuels for Transport. Available online: <https://www.ieabioenergy.com/wp-content/uploads/2013/10/IEA-Biofuel-Roadmap.pdf> (accessed on 9 June 2020).

38. Floraini, M.; Ong, H.C.; Backs, M.; Chung, W. A review on gas-to-liquid enzymatic reaction for biofuel production from algae. *Renew. Sustain. Energy Rev.* 2014, 39, 24–34.


39. Knapczyk, A.; Francik, S.; Wojcik, A.; Slipek, Z. Application of methods for scheduling tasks in the single-stage process directly from syngas in an exothermic reaction [85]. Inayat et al. [86] investigated the use of an empty fruit bunch as feedstock to synthesize DME in a production process that involved gasification, water-gas shift reactions, and CO₂ removal. Partial oxidation, gasification, Boudouard, methanation, and methane-reforming reactions take place during the gasification stage. The schematic diagram of the production process is shown in Figure 4 [85].

40. Isah, S.; Ozhay, G. Valorization of food loss and wastes: Feedstocks for biofuels and valuable chemicals. *Front. Sustain. Food Syst.* 2020, 4, 82.

41. Rajak, U.; Verma, T.N. Effect of emission from ethylic biodiesel of edible and non-edible vegetable oil, animal fats, waste oil, and alcohol in CI engine. *Energy Convers. Manag.* 2018, 166, 704–718.

42. Ahamed, M.; Dash, S.; Umar, A.; Lingfa, P. A critical review on the production of biodiesel from *Jatropha*, *Karanja* and *Castor* feedstocks. In *Bioresource Utilization and Bioprocess*; Ghosh, S., Sen, R., Chanakya, H., Pariatamby, A., Eds.; Springer: Singapore, 2020; pp. 107–115.

43. Hadin, A.; Eriksson, O. Horse manure as feedstock for anaerobic digestion. *Waste Manag.* 2016, 36, 506–518.

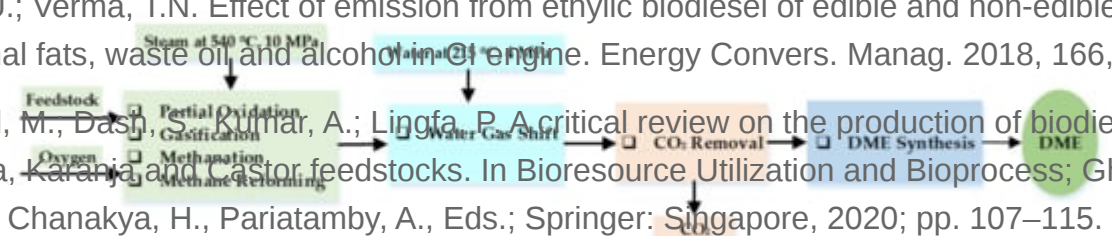

44. Ajanovic, A. Biofuels versus food production: Does biofuels production increase food prices? As a result of its many applications, the global DME market, appraised at USD 4790 million in 2017, is projected to reach USD 9100 million in 2024 [95]. DME as a CI engine fuel discharges low NO_x, SO_x, and soot emissions and has outstanding combustion attributes [96]. The choice of DME (CH₃OCH₃) as a sustainable fuel for CI engines is strengthened by its superior oxygen content, which allows better combustion and lower NO_x, UHC, and smoke emissions, higher cetane numbers, and shorter ignition delays than PBD fuel. The emission of less smoke and PM can also be attributed to the lack of C-C bonds, as DME has only C-H and C-O bonds. DME-fueled CI engines offer the best emissions when compared with biodiesel and F-T diesel, but its utilization as a vehicle fuel and its adoption for vehicle fleets is hampered by the lack of production, storage, transport, and dispensing infrastructures. Also, DME has lower lubricity, resulting in increased wear of moving parts; lower viscosity, which can cause

47. Patel, A.; Sarpta, K.; Pruthi, R.A.; Pruthi, M.; Maitra, S. Utilization of Clarified Butter Sludge as a Waste to Feedstock for cost-effective production of biodiesel. *Food* 2019, 8, 234. [\[97\]](#)

48. Ekeoma, M.; Okoye, P.; Ajiwe, V.; Hameed, B. Modified coconut shell as active heterogeneous catalyst for the transesterification of waste cooking oil. *J. Chem. Soc. Niger.* 2020, 45, 107.

Table 4. Effects of biodiesel, F-T diesel, and DME as alternative fuels for CI engines.

Biofuel Used	Engine Details	Performance	Effects Emissions	Ref.
		• ↑BSFC	• ↑CO, CO ₂ , NO _x ,	
49. Ndiaye, M.; Arhaliass, A.; Legrand, J.; Roelens, G.; Kerihuel, A.	Biodiesel: Biorefining heavily degraded contaminant-rich waste animal fat and formulation as diesel fuel additive.	• ↑BSFC	• ↑CO, CO ₂ , NO _x ,	
50. Nikhom, R.; Mueanmas, C.; Suppalakpanya, K.; Tongurai, C.	Biodiesel 1C, 4S, NA, DI, air-cooled	• ↑BTE	• ↓HC, SO	[98]
51. Hess, J.R.; Ray, A.E.; Rials, T.G.	Biodiesel 1C, common-rail DI, r = 16	• ↑BTE	• ↑SO, CO, UHC	[99]
52. Puettmann, M.; Sahoo, K.; Wilson, K.; Oneil, E.	Biodiesel 1C, 4S, DI, VCR, water-cooled	• ↑BSFC	• ↑NO _x	
53. Du, C.; Zhao, X.; Liu, D.; Lin, C.S.K.; Wilson, K.; Luque, R.; Clark, J.	Biodiesel 1C, 4S, DI, VCR, water-cooled	• ↑BTE, BSFC, IGT	• ↑NO _x	[100]
54. Abdulkareem-Alsultan, G.; Asikin-Mijan, N.; Lee, H.; Taufiq-Yap, Y.	Biodiesel 2C, water-cooled, 2020, pp. 499–504.	• ↓BP	• ↓CO, UHC	[101]
55. Jamwal, V.L.; Kapoor, N.; Gandhi, S.G.	Biodiesel 1C, 4S, DI, VCR, water-cooled	• ↓12.7% BSFC	• ↑CO ₂ , NO _x ,	
56. Sindhu, R.; Binod, B.; Pandey, A.; Ankanam, S.; Duan, Y.; Awasthi, M.K.	Biodiesel 1C, 4S, DI, VCR, water-cooled	• ↓10.8% BP, 3.6% BTE	• ↓CO, UHC, SO	[102]
57. Nwoba, E.G.; Vadiveloo, A.; Ogbonna, C.N.; Ubi, B.E.; Ogbonna, J.C.; Moheimani, N.R.	DME 1C, 4S, DI, VCR, water-cooled	• ↑IMEP	• ↑NO _x , • ↓HC, CO	[103]
58. Veeramuthu, A.; Ngamcharussrivichai, C.	DME 1C, 4S, DI, VCR, water-cooled	• ↑IMEP	• Almost zero soot	
59. Chew, B.; Shen, X.; Anwar, J.; Ibrahim, N.; Gh, Y.	DME 1C, 4S, DI, VCR, water-cooled	• ↑IMEP	• ↑NO _x , • ↓HC, CO	[104]

Biofuel Used	Engine Details	Effects		Ref.
		Performance	Emissions	
60. Subramanian, K.A. Biofueled Reciprocating Internal Combustion Engines; CRC Press: Boca Raton, FL, USA, 2017; p. 15.	DME 4C, NA, in-line, common rail, r = 18.5	• ↑BSFC	• ↑NOx, HC, CO	[105]
61. IEA. Key World Energy Statistics. 2018. Available online: https://webstore.iea.org/key-world-energy-statistics-2018 (accessed on 12 July 2020).				
62. TERM. Transport Indicators Tracking Progress towards Environmental Targets in Europe; No 7/2015; European Environment Agency: Copenhagen, Denmark, 2015; Available online: https://www.eea.europa.eu/publications/term-report-2015 (accessed on 12 July 2020).	DME 1S, common rail, r = 16.7	• ↓BSFC	• ↓NOx	[106]
63. EIA—Energy Information Administration. International Energy Outlook. 2017. Available online: https://www.eia.gov/outlooks/ieo/ (accessed on 4 August 2020).		• ↓BSFC	• ↓CO, CO2, HC,	[107]
64. Staffell, I.; Scamman, D.; Abad, A.V.; Balcombe, P.; Dodds, P.E.; Ekins, P.; Shah, N.; Ward, K.R. The role of hydrogen and fuel cells in the global energy system. <i>Energy Environ. Sci.</i> 2019, 12, 463–491.	F-T 1S, 4S, NA, DI, water-cooled, r = 18		NOx, SO	

↑ = increased, ↓ = reduced, DI = direct injection, EGT = exhaust gas temperature, VCR = variable compression

65. IRENA. Global Energy Transformation: The Renewable Pathway to a Carbon Neutral World (Background Report to the 2019 Edition); International Renewable Energy Agency: Abu Dhabi, United Arab Emirates, 2019; Available online: <https://www.irena.org/publications/2019/Apr/Global-energy-transformation-The-REmap-transition-pathway> (accessed on 4 August 2020).

3. Implications

66. Martins JJ, Ortiz P. Alternative fuels for internal combustion engines. *Energies* 2020, 13, 4086.
67. Lisý, M.; Lisá, H.; Jecha, D.; Baláš, M.; Křížan, P. Characteristic properties of alternative biomass biofuels have been widely accepted as alternative fuels for the transportation sector to enhance the performance of transport vehicles. The challenges associated with the application of FB fuels as ICE fuels include operational, performance safety, cost, infrastructural, and availability challenges. The conversion of various categories of waste into useful fuels has become advantageous in terms of economic, sanitation, availability, and environmental considerations. The choice of feedstock, conversion technology, production infrastructure, and utilization platform cannot be restricted to fuel producers and engine manufacturers but must involve professionals from many disciplines, including finance, plant science, microbiology, chemical engineering, mechanical engineering, process engineering, environmental science, food science, agronomy, and more. Investigations into areas such as metabolic engineering, processing subsidizations, tax immunity, feedstock identification, equipment development, and the modifications; Bao, C; Wang, W; Wang, H. Estimation of kinetic parameters of biodiesel fuels from fatty acid methyl ester composition and temperature. *J. Clean. Prod.* 2020, 251, 120761. [108][109][110]
68. Adedejare, A.E.; Olorinde, M.; Lawal, A.I. Application of metaheuristic based artificial neural network and multilinear regression for the prediction of higher heating values of fuels. *Int. J. Coal Prep. Util.* 2020, 1–22.
69. Noushabadi, A.S.; Dashti, A.; Raji, M.; Zarei, A.; Mohammadi, A.H. Estimation of cetane numbers of biodiesel and diesel oils using regression and PSO-ANFIS models. *Renew. Energy* 2020, 4, 146.
70. The authors, funders, investment analysts, and other development partners must unite in making biofuel production and utilization worthwhile and sustainable.
71. SAE International Hybrid-EV Committee. J2841: Utility Factor Definitions for Plug-In Hybrid Electric Vehicles Using Travel Survey Data; SAE International: Warrendale, PA, USA, 2010.
72. Arat, H.T.; Baltacioglu, M.K.; Özcanli, M.; Aydin, K. Effect of using Hydroxy–CNG fuel mixtures in a non-modified diesel engine by substitution of diesel fuel. *Int. J. Hydrog. Energy* 2016, 41, 8354–8363.

73. McCormick, R.L.; Fioroni, G.; Fouts, L.; Christensen, E.; Yanowitz, J.; Polikarpov, E.; Albrecht, K.; Gaspar, D.; Gladden, J.; George, A. Selection criteria and screening of potential biomass-derived streams as fuel blendstocks for advanced spark-ignition engines. *SAE Int. J. Fuels Lubr.* 2017, 10, 442–460.
74. Mustafa, A.; Lougou, B.G.; Shuai, Y.; Wang, Z.; Tan, H. Current technology development for CO₂ utilization into solar fuels and chemicals: A review. *J. Energy Chem.* 2020, 49, 96–123.
75. Chintala, V. Production, upgradation and utilization of solar assisted pyrolysis fuels from biomass—a technical review. *Renew. Sustain. Energy Rev.* 2018, 90, 120–130.
76. Jiao, Y.; Liu, R.; Zhang, Z.; Yang, C.; Zhou, G.; Dong, S.; Liu, W. Comparison of combustion and emission characteristics of a diesel engine fueled with diesel and methanol-Fischer-Tropsch diesel-biodiesel-diesel blends at various altitudes. *Fuel* 2019, 243, 52–59.
77. Bongartz, D.; Doré, L.; Eichler, K.; Grube, T.; Heuser, B.; Hombach, L.E.; Robinius, M.; Pischinger, S.; Stolten, D.; Walther, G.; et al. Comparison of light-duty transportation fuels produced from renewable hydrogen and green carbon dioxide. *Appl. Energy* 2018, 231, 757–767.
78. Bae, C.J.; Kim, J. Alternative fuels for internal combustion engines. *Proc. Combust. Inst.* 2017, 36, 3389–3413.
79. Dupnock, T.L. Development of a High Performance, Biological Trickling Filter to Upgrade Raw Biogas to Renewable Natural Gas Standards. Master's Thesis, Duke University, Durham, NC, USA, 2019.
80. Bora, D.; Barbora, L.; Borah, A.J.; Mahanta, P. A Comparative Assessment of Biogas Upgradation Techniques and Its Utilization as an Alternative Fuel in Internal Combustion Engines. In *Alternative Fuels and Advanced Combustion Techniques as Sustainable Solutions for Internal Combustion Engines. Energy, Environment, and Sustainability*; Singh, A.P., Kumar, D., Agarwal, A.K., Eds.; Springer: Singapore, 2021; pp. 95–115.
81. Pramanik, S.K.; Suja, F.B.; Zain, S.M.; Pramanik, B.k. The anaerobic digestion process of biogas production from food waste: Prospects and constraints. *Bioresour. Technol. Rep.* 2019, 8, 100310.
82. Baena-Moreno, F.M.; Rodríguez-Galán, M.; Vega, F.; Vilches, L.F.; Navarrete, B. Recent advances in biogas purifying technologies. *Int. J. Green Energy* 2019, 16, 401–412.
83. Baena-Moreno, F.M.; le Saché, E.; Pastor-Pérez, L.; Reina, T. Biogas as a renewable energy source: Focusing on principles and recent advances of membrane-based technologies for biogas upgrading. In *Membranes for Environmental Applications*; Zhang, Z., Zhang, W., Lichtfouse, E., Eds.; Springer: Cham, Switzerland, 2020; pp. 95–120.
84. Saboor, A.; Khan, S.; Ali Shah, A.; Hasan, F.; Khan, H.; Badshah, M. Enhancement of biomethane production from cattle manure with codigestion of dilute acid pretreated lignocellulosic biomass.

- Int. J. Hydrog. Energy 2017, 14, 632–637.
85. Stepanenko, D.; Kneba, Z. DME as alternative fuel for compression ignition engines-a review. *Combust. Eng.* 2019, 177, 172–179.
 86. Inayat, A.; Ghenai, C.; Naqvi, M.; Ammar, M.; Ayoub, M.; Hussin, M.N.B. Parametric Study for Production of Dimethyl Ether (DME) As a Fuel from Palm Wastes. *Energy Procedia* 2017, 105, 1242–1249.
 87. Evans, C.; Smith, C. Biomass to Liquids Technology. In *Comprehensive Renewable Energy*; Sayigh, A., Ed.; Elsevier: Oxford, UK, 2012; Volume 5, pp. 155–204.
 88. Zang, G.; Sun, P.; Elgowainy, A.A.; Bafana, A.; Wang, M. Performance and cost analysis of liquid fuel production from H₂ and CO₂ based on the Fischer-Tropsch process. *J. CO₂ Util.* 2021, 46, 101459.
 89. IRENA. Hydrogen: A Renewable Energy Perspective; International Renewable Energy Agency: Abu Dhabi, United Arab Emirates, 2019; Available online: https://www.irena.org/-/media/Files/IRENA/Agency/Publication/2019/Sep/IRENA_Hydrogen_2019.pdf (accessed on 5 June 2021).
 90. Qureshy, A.M.M.I.; Dincer, I. A new integrated renewable energy system for clean electricity and hydrogen fuel production. *Int. J. Hydrog. Energy* 2020, 45, 20944–20955.
 91. Afanasiev, A.; Pavlov, D.; Epishkin, V.; Gapchenko, U. Application of hydrogen and hydrogen-containing gases in internal combustion engines. *IOP Conf. Ser. Mater. Sci. Eng.* 2020, 734, 012198.
 92. Asoyan, A.R.; Danilov, I.K.; Asoyan, I.A.; Polishchuk, G.M. Hydrogen application in internal combustion engines. *RUDN J. Eng. Res.* 2020, 21, 14–19.
 93. Chandran, D. Compatibility of diesel engine materials with biodiesel fuel. *Renew. Energy* 2020, 147, 89–99.
 94. Méndez, C.I.; Ancheyta, J. Kinetic models for Fischer-Tropsch synthesis for the production of clean fuels. *Catal. Today* 2020, 335, 3–16.
 95. Dimethyl Ether (DME) Market. Available online: <https://www.globenewswire.com/news-release/2018/09/09/1568236/0/en/Global-Dimethyl-Ether-Market-Will-Reach-USD-9-100-Million-By-2024-Zion-Market-Research.html> (accessed on 31 July 2020).
 96. Farsi, M.; Fekri Lari, M.; Rahimpour, M.R. Development of a green process for DME production based on the methane tri-reforming. *J. Taiwan Inst. Chem. Eng.* 2020, 106, 9–19.
 97. Mondal, U.; Yadav, G.D. Perspective of dimethyl ether as fuel: Part I. Catalysis. *J. CO₂ Util.* 2019, 32, 299–320.

98. Simsek, S. Effects of biodiesel obtained from Canola, sefflower oils and waste oils on the engine performance and exhaust emissions. *Fuel* 2020, 265, 117026.
99. Hirner, F.S.; Hwang, J.; Bae, C.; Patel, C.; Gupta, T.; Agarwal, A.K. Performance and emission evaluation of a small-bore biodiesel compression-ignition engine. *Energy* 2019, 183, 971–982.
100. Rosha, P.; Mohapatra, S.K.; Mahla, S.K.; Cho, H.; Chauhan, B.S.; Dhir, A. Effect of compression ratio on combustion, performance, and emission characteristics of compression ignition engine fueled with palm (B20) biodiesel blend. *Energy* 2019, 178, 676–684.
101. Srikanth, H.; Venkatesh, J.; Godiganur, S.; Manne, B.; Bharath Kumar, S.; Spurthy, S. Combustion, performance, and emission characteristics of dairy-washed milk scum biodiesel in a dual cylinder compression ignition engine. *Energy Source Part A* 2019, 42, 1–18.
102. Nirmala, N.; Dawn, S.S.; Harindra, C. Analysis of performance and emission characteristics of waste cooking oil and *Chlorella variabilis* MK039712.1 biodiesel blends in a single cylinder, four strokes diesel engine. *Renew. Energy* 2020, 147, 284–292.
103. Park, S.H.; Lee, C.S. Combustion performance and emission reduction characteristics of automotive DME engine system. *Prog. Energy Combust. Sci.* 2013, 39, 147–168.
104. Yang, S.; Lee, C. Exhaust gas characteristics according to the injection conditions in diesel and DME engines. *Appl. Sci.* 2019, 9, 647.
105. Raza, M.; Chen, L.; Ruiz, R.; Chu, H. Influence of pentanol and dimethyl ether blending with diesel on the combustion performance and emission characteristics in a compression ignition engine under low temperature combustion mode. *J. Energy Inst.* 2019, 92, 1658–1669.
106. Liu, H.; Wang, Z.; Zhang, J.; Wang, J.; Shuai, S. Study on combustion and emission characteristics of Polyoxymethylene Dimethyl Ethers/diesel blends in light-duty and heavy-duty diesel engines. *Appl. Energy* 2017, 185, 1393–1402.
107. Yongcheng, H.; Longbao, Z.; Shangxue, W.; Shenghua, L. Study on the performance and emissions of a compression ignition engine fuelled with Fischer-Tropsch diesel fuel. *Proc. Inst. Mech. Eng. Part D* 2006, 220, 827–835.
108. Malode, S.J.; Prabhu, K.K.; Mascarenhas, R.J.; Shetti, N.P.; Aminabhavi, T.M. Recent advances and viability in biofuel production. *Energy Convers. Manag.* 2021, 10, 100070.
109. Adegboye, M.F.; Ojuederie, O.B.; Talia, P.M.; Babalola, O.O. Bioprospecting of microbial strains for biofuel production: Metabolic engineering, applications, and challenges. *Biotechnol. Biofuels* 2021, 14, 5.
110. Lin, C.Y.; Lu, C. Development perspectives of promising lignocellulose feedstocks for production of advanced generation biofuels: A review. *Renew. Sustain. Energy Rev.* 2021, 136, 110445.

Retrieved from <https://encyclopedia.pub/entry/history/show/33692>