

# Battery Thermal Management Systems

Subjects: Energy & Fuels

Contributor: Florin Mariasiu

In the current context of transition from the powertrains of cars equipped with internal combustion engines to powertrains based on electricity, there is a need to intensify studies and research related to the command-and-control systems of electric vehicles. One of the important systems in the construction of an electric vehicle is the thermal management system of the battery with the role of optimizing the operation of the battery in terms of performance and life.

Keywords: battery ; thermal management ; design ; performance ; heat transfer ; efficiency

---

## 1. Introduction

Interest in electric-driven vehicles like hybrid electric vehicles, plug-in hybrid electric vehicles and battery electric vehicles has undoubtedly increased in recent years, following the intensification of environmental regulations on greenhouse gas emissions <sup>[1][2][3]</sup>. The present lithium-ion (Li-ion) batteries, with their large specific energy, high specific power, low self-discharge rate, high voltage, relatively long life and good recyclability, have been widely used in electric vehicles (EVs) and are regarded as the most suitable energy storage device for electric-driven vehicles <sup>[4][5]</sup>. However, operating and even storage temperature will affect the performance of Li-ion batteries <sup>[6]</sup>. Studies have shown that temperature is the main factor influencing battery aging with a negative impact on capacity and internal resistance as well <sup>[7]</sup>. Additionally, an uneven temperature distribution inside a battery pack can lead to electrically unbalanced cells, and an electric imbalance leads to a capacity loss of the entire battery pack, and to the overcharge of the affected cells during charging, resulting in power losses and increased temperatures <sup>[8][9]</sup>.

Most of the temperature effects are related to chemical reactions occurring in the batteries and also materials used in the batteries <sup>[10]</sup>. The operational temperature range of EV batteries system commonly varies from  $-40\text{ }^{\circ}\text{C}$  to  $60\text{ }^{\circ}\text{C}$  <sup>[11][12]</sup>. However, it is generally accepted that to obtain the best performances, the preferred working temperature of EV batteries ranges from  $15\text{ }^{\circ}\text{C}$  to  $35\text{ }^{\circ}\text{C}$  <sup>[6][13][14][15]</sup>.

Low temperatures typically heavily reduce the power and energy capacity of the batteries and increase their internal impedance <sup>[16]</sup>. It has been measured that at  $-20\text{ }^{\circ}\text{C}$  the increase of internal resistance causes a 60% drop in capacity <sup>[17]</sup>. Thus, a significant challenge is the charge and discharge rate in subzero operating temperatures.

High temperatures increase the reaction rate, which results in the delivery of higher power and in an improved capacity, but in the same time leads to even higher temperatures and an increase in thermal load <sup>[18]</sup>. Moreover, an additional problem caused by high temperatures may be the capacity fading because of the electrolyte decomposition and the non-uniformity of the passivation layer <sup>[19]</sup>. If heat is not dissipated at least at the same rate at which it is generated in the batteries, temperatures may increase uncontrollably, resulting in the disintegration of materials and components <sup>[20]</sup> or even in the thermal runaway of the batteries <sup>[21]</sup>. Thermal runaway is an incident that leads to a sudden temperature rise, gas generation and even explosion of the battery <sup>[22]</sup>, putting to risk the safety of the vehicle and its passengers <sup>[23]</sup>.

A non-uniform temperature distribution inside a single cell leads to a variable rate of electrochemical reactions in different zones of the cell and therefore to a partial energy utilization and a reduced battery lifetime <sup>[24]</sup>. Studies show that a temperature difference of more than  $5\text{ }^{\circ}\text{C}$  inside a battery cell results in a 25% increase in thermal aging and a 10% reduction in power capacity <sup>[25][26][27]</sup>. At a battery pack level, it is common and normal for differences between cells to develop, regarding their capacity, voltage and internal resistance <sup>[28]</sup>. These variations result in different thermal behaviors and therefore in a thermal gradient across the battery pack <sup>[29]</sup>. A  $5\text{ }^{\circ}\text{C}$  temperature difference can cause a capacity reduction of 1.5%–2% of the battery pack <sup>[30]</sup>, as well as a power capability reduction of 10% <sup>[31]</sup>.

Therefore, the design of efficient battery thermal management systems (BTMS) is necessary to maintain the battery temperatures in the desired range and to reduce as much as possible the temperature non-uniformity inside the battery pack <sup>[32]</sup>.

## 2. Battery Thermal Management Systems

### 2.1. Air-Based BTMS

The advantages of these systems are the low cost, simplicity, light extra weight [33][34], and despite their low-conductivity and low-efficiency [35], they are still studied by researchers and used in electric-driven vehicles. A first classification of air-based systems can be made considering whether it is natural or forced convection. Despite its simple structure, the natural method creates large thermal gradients in the battery pack and is highly dependent on ambient conditions [36]. Therefore, a forced-air system is necessary for most applications, despite its higher costs and additional power consumption. A second classification of air-based systems is based on the source of the air, which can be external, cabin pre-conditioned or pre-conditioned by an auxiliary heat exchanger [6].

### 2.2. Liquid-Based BTMS

Liquid-cooled systems are the most used in practical applications [37], due to their high efficiency and compactness. Liquid possesses good heat capacity and heat transfer coefficient, representing a suitable solution for the BTM of EVs [38]. Compared to an air-cooling system, 2–3 times less energy is needed to maintain the same average temperature of the batteries [39]. The disadvantages are the increased complexity, added weight, extra costs, rigidity of the structure [40][41]. Moreover, a significant additional power is required to circulate the fluid at the desired flow rate, increasing the overall energy consumption of the vehicle [42].

Liquid-cooling is easily applicable for prismatic batteries due their regular shape, allowing a compact arrangement of the BTMS, while cylindrical batteries require special structures to integrate the cooling channels, increasing the system's complexity and mass. The most common solution for prismatic and pouch batteries is the implementation of cooling plates. General investigations analyze the temperature and velocity distribution inside the cooling plates [43], and several studies [44][45][46] investigate by means of orthogonal test the influence of different parameters, such as liquid inlet temperature, cooling plate width, mass flow rate or number of channels. Shang et al. [44] obtained an improvement of 12.61% compared to the maximum temperature without the orthogonal optimization. Ye et al. [45] achieved a lowering of maximum temperature by 5.24% and of the pressure drop by 16.88%. The sensitivity analysis of the orthogonal test also showed that the greatest influence on the pressure loss is caused by the center channel distance and the size of the inlet plenum. The numerical calculations conducted by Monika et al. [46] showed that for cold plates placed between the batteries, a parallel flow arrangement with the inlet placed near the tab region represents the best solution. The authors found that a 5-channeled cold plate of 4 mm width represents the best trade-off between heat transfer and pressure drop. Patil et al. [47] conducted a parametric study to evaluate the thermal performance of different U-turn type microchannel cold plates. The results suggest that a surface area coverage ratio of 0.75 and a hydraulic diameter of the channels of 1.54 mm offer the best cooling capacity. The numerical simulations also show that alternating single inlet and outlet channels decrease the maximum temperature and improve temperature uniformity.

### 2.3. PCM-Based BTMS

Phase change materials represent an interesting alternative to the conventional forced-air and liquid cooling systems, because it could allow the implementation of a passive BTMS. It is applied especially for cylindrical batteries, because it allows the filling of the unused spaces between the batteries. PCMs have high latent heat capacity and are able to maintain the temperature of the batteries in a small range, close to the melting temperature of the PCM [48]. The melting point is in the 5.5–76 °C temperature range and the phase change process is usually not isotherm [9]. In case of continuous charge and discharge cycles at high rates, there is the risk of the PCM melting completely, leading to thermal instability and leakage of the PCM. Moreover, the melting of the PCM automatically increases its volume, which must be considered when designing a PCM-based BTMS. Another disadvantage of PCMs is their low thermal conductivity, resulting in a difficult heat dissipation.


Numerous studies addressed the problem of low thermal conductivity. Azizi et al. [49] constructed a BTMS made of PCM and aluminum wire mesh plates as a thermal conductivity enhancer. The wire mesh plates with high voidage values are preferred over the aluminum foams for a better filling of the pores during the phase change of the PCM. Zhang et al. [50] study the influence of different concentrations of aluminum nitrite (AIN)-based CPCMs. The measurements showed that increasing the AIN mass fraction improved thermal conductivity from 1.48 W/mK to 4.331 W/mK at 50 °C, as well as the tensile strength, bending strength and impact strength. Zhang et al. [51] designed and experimentally investigated a BTMS using copper metal foam saturated PCM. For a 5 C discharge rate the maximum temperature was lowered to 47.86 °C compared to 54.115 °C in the case of pure PCM. The temperature non-uniformity increasing rate also showed smaller values.

## 2.4. Heat Pipe-Based BTMS

Heat pipes are heat transfer devices with extremely high thermal conductivity, 90 times higher than copper [52], ensuring better heat dissipation and temperature uniformity. They represent a passive, compact, lightweight BTMS, with no need of maintenance and long life cycle [53]. The working principle consists in the phase change of the internal working fluid, which absorbs heat at the evaporation section and releases it at the condensation section. As long as there is a temperature gradient between the two sections, the transfer of heat goes on, without any power consumption. Despite its very high thermal conductivity however, in most applications heat pipe is coupled with forced air or liquid cooling for a more effective heat dissipation at the condensation section.

Heat pipe-based BTMSs are studied mostly for prismatic and pouch batteries due to the adaptability of the shapes and the large available contact areas, while in case of cylindrical batteries special attention needs to be addressed to the contact surface between heat pipe and batteries.

Zhang et al. [54] proposed a passive heat pipe-based BTMS for prismatic batteries, using flat heat pipes with fins, as presented in **Figure 1a**. Compared to natural convection and aluminum plates, the maximum temperature was 73.7% lower and the maximum temperature difference 50.1% lower. Behi et al. [53] designed a smart heat pipe-based BTMS, using the least number of heat pipes based on the multizone analysis of temperature distribution determined by thermal imaging. The high discharge investigation revealed that the most critical zone of a prismatic LTO cell is the center top region. The thermal analysis, illustrated in **Figure 1c**, showed that a single heat pipe with an optimal placement is sufficient. Kleiner et al. [55] introduced a concept where heat pipes are attached to the terminals of prismatic batteries, as presented in **Figure 1b**. This reduces the heat flow path and thermal resistance from the heat generation sources, located in the busbar and inside the battery, to the cooling system at the bottom of prismatic batteries. The results show that without any increase in charging time, temperature at the terminals and in the jelly roll are 19 °C, respectively 2 °C lower. Temperature distribution is also improved, due to conduction of 27% of the generated heat.

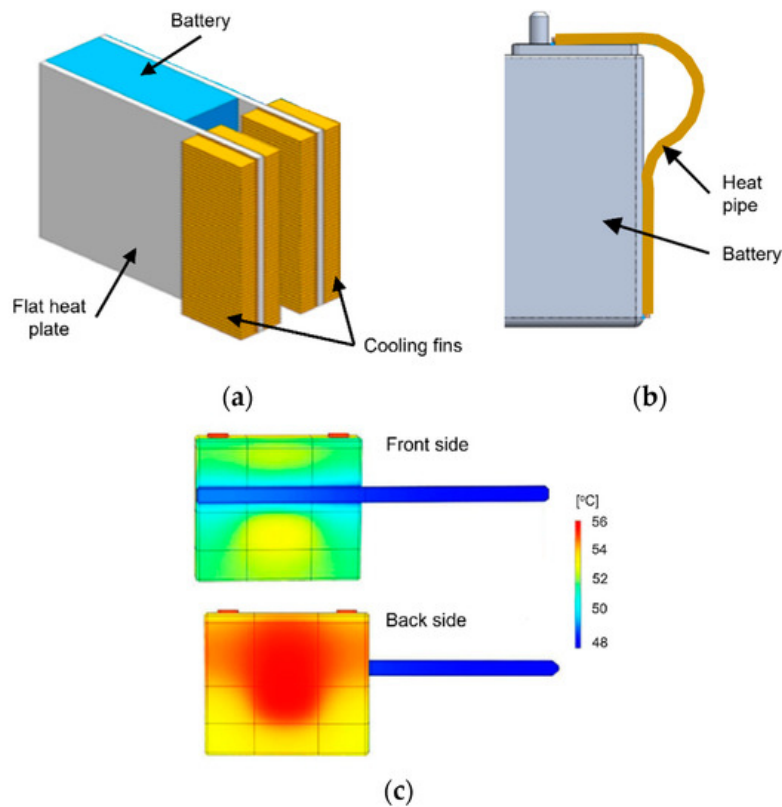


**Figure 1.** (a) Passive BTMS using flat heat pipes with fins (adapted from source [54]); (b) thermal cooling of prismatic battery using heat pipe (adapted from source [56]); (c) front and back side of prismatic cell with heat pipe in 8 C discharging rate (adapted from source [53]).

## 2.5. Hybrid BTMS

Hybrid BTMSs usually combine active and passive methods, with the aim of enhancing the heat transfer process of passive systems and offering the possibility to actively control their working process. In general, PCMs are used for a better temperature uniformity and the active system reduces the risk of heat saturation, while HPs are used for their high thermal conductivity which significantly improves local heat transfer and the active system enhances the heat release at

the condensation section [40]. Although forced air can be successfully implemented as the active system for lower thermal load systems, liquid cooling offers higher efficiency. Another classification criterion is the combination method, which can be parallel, series or both. The main disadvantages of hybrid BTMSs regularly are their weight, volume, complexity and energy consumption.

Feng et al. [57] proposed a cooling device for the thermal and strain management of cylindrical batteries using a design that combines heat pipes and fins, presented in **Figure 2a**. The optimal BTMS for the presented concept is the one with forced convection, using a fan in the center of the battery pack. At a 1 C discharge rate, the maximum temperature is 15 °C lower than with natural convection and the rate of temperature increase is lowered. Ye et al. [58] used micro heat pipes that have grooves and fins on the inner walls, increasing the heat transfer capacity. Experimental measurements were made adding fins at the end of the micro heat pipes and using forced air-convection. The study of Liu et al. [56] analyzes besides the enhanced thermal model also the cooling performance of ultra-thin micro heat pipes combined with forced air-convection. The results show that for an effective heat pipe based BTMS it is recommended to have assistance by forced convection. The coupling of the two technologies can reduce maximum temperature by 7.1 °C at a 2 C discharge rate, compared to no heat pipes. Another system combining heat pipe with forced air cooling was developed by Tran et al. [59], where thermally conductive resin fills the spacing between the cylindrical batteries and the heat pipe with heat sink are placed on the lateral shell of the module, as shown in **Figure 2b**. Compared to using only the heat sink, thermal resistance was reduced by 30% under natural convection and by 20% under forced air convection. A similar conduction element between cylindrical batteries and heat pipes, was designed also by Wang et al. [60], highlighting the importance of the contact surface. A sensitivity analysis is performed, and it is found that the height of the conduction element is the most influential on temperature distribution, followed by the circumference angle of the contact surface, while the variation of thickness of the conduction element and battery spacing are insignificant regarding thermal homogeneity.

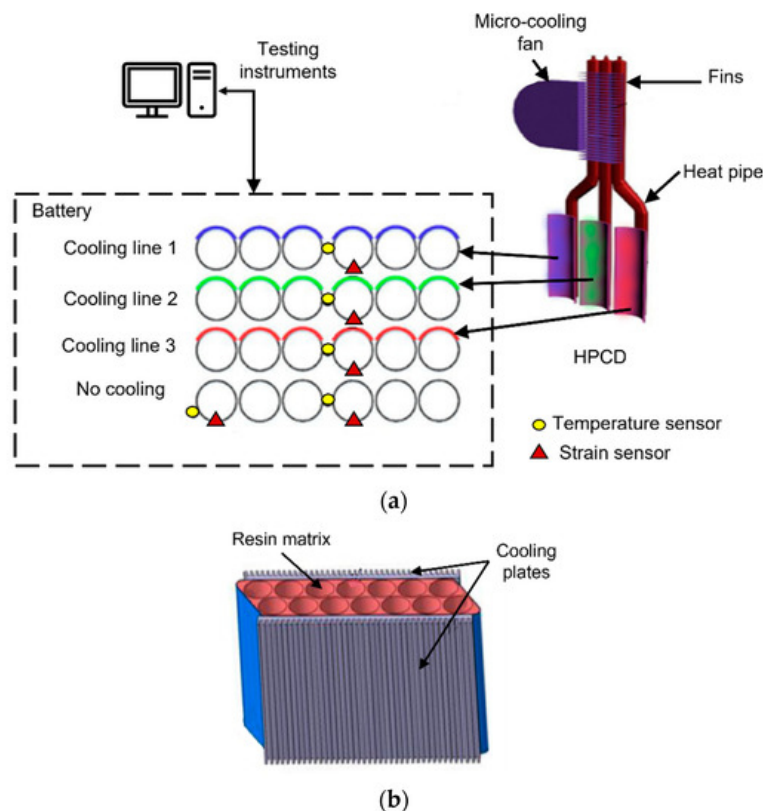

**Figure 2.** Hybrid BTMSs using heat pipe coupled with air cooling (a) schematic of heat pipe and fin BTMS for cylindrical batteries (adapted from source [57]); (b) battery module with resin matrix and heat pipe (adapted from source [59]).

### 3. Conclusions

Air cooling represents the most easily applicable solution for the thermal management of batteries. However, the low specific heat of air still is a major concern when considering its application in full-size battery packs. A possible solution could be the use of active cooling and heating, using an evaporator or heater core. This would allow a reduced dependency on ambient conditions, an increased control over the inlet temperature in the battery pack and therefore a more efficient management of the temperatures inside the pack. Although such a method would increase the heat transfer, the occupied large volume still represents a significant disadvantage. The inlet and outlet scheme and the air flow configuration are also promising research directions, with numerous possible combinations. However, the possibility of

implementing these schemes in a full-size battery pack should also be investigated, considering the need to implement the required inlet and outlet channels in the tight package of a vehicle. Regarding the uneven temperature distribution of air cooling, this can be reduced by using air flow channels with variable widths or by distribution pipes.

The large use of prismatic and pouch batteries in commercial vehicles means that liquid cooling plates are one of the most implemented cooling systems in electric vehicles, due to their good heat capacity and compact arrangement. Most research studies focus on various parameters regarding heat transfer and pressure drop, but only a few consider the uneven heat generation in the batteries, which is even more significant for the larger prismatic and pouch batteries. Therefore, more attention in future studies should be accorded to the possibility of implementing bidirectional or reciprocating liquid flows, considering the local heat generation, therefore improving the temperature distribution. In the presented study, examples of improving the temperature uniformity offered by cooling plates are presented using double-layered plates and a better mass distribution in the channels. The heat transfer capacity of conventional liquid cooling systems can further be enhanced using PCM emulsions or liquid metal. For cylindrical batteries, the poor adaptability to indirect liquid cooling is represented by the use of wavy channels, half helical ducts or conduction elements, which significantly increase complexity and add weight to the system.

Adapting the existing refrigerant circuit of the vehicles to serve also for the thermal management of batteries is a concept with a relatively high probability of practical application. The presented studies clearly show the potential of such systems, having a high heat transfer capacity, a capability to cool below ambient temperature and the possibility of heating. Despite these advantages, there are no mentioned studies to analyze the sizing of such a system for a full-size battery pack, nor the necessary changes to the existing air conditioning system to cope with the additional thermal load of the battery. More effort should be directed towards the development of a large-scale system, with precise control algorithms for cabin comfort, battery maximum temperature and temperature uniformity.

The main disadvantages of pure PCMs, namely the low thermal conductivity and leakage problems can be tackled by adding other materials such as EG, AlN, nanosilica, copper mesh foam and others, to form CPCMs. Although the enhancement of pure PCM with additional materials in different concentrations is a promising research direction, the preparation processes are very laborious, as well as time and energy consuming. It could be of interest by how much the preparation of large quantities of CPCM increases the overall costs of full-size battery packs. Moreover, in the case of pouring hot, melted CPCM directly around the batteries, further investigations are needed regarding the possible negative effects on Li-ion batteries.

Another disadvantage, the limited capacity of storing thermal energy as latent heat, represented by the complete melting of PCM, can be solved by coupling with air or liquid cooling for a better heat dissipation and recovery of the PCM. At present, the main reasons that stop the large-scale applicability of PCMs are the leakage problems, with a negative impact on the safety and reliability of the system and the high additional mass.

Heat pipes coupled with air, water, or refrigerant cooling present good heat transfer efficiency due to the excellent thermal conductivity of HPs, but to also obtain temperature uniformity, it is possible to further add PCM. Research regarding alternative materials in the construction of heat pipes should be closely followed. The possible replacement of copper with aluminum would significantly reduce the costs and could also save some weight, but more investigations in this direction are necessary to determine by how much would the thermal conductivity be affected.

The low COP of TECs means that they are usually used as a supporting device to existing BTMSs, with the advantages of high cooling capacity and possibility of heating. A BTMS using only TEC could be applicable after a significant increase of the energy efficiency of these. In order to be economically competitive with other systems, the thermoelectric figure of merit should increase approximately three times, which for the moment is only possible by using sophisticated and expensive nanostructures.

Both HPs and TECs increase the overall costs of the system, slowing down their large-scale applicability in electric-driven vehicles. However, the use of cheaper alternative materials in the construction of these components could result in an intensified interest in HP-based and TEC-based BTMSs.

The results and good practices obtained so far in the design, configuration and development of BTMSs for Li-ion batteries can further become a starting point for studies related to the thermal management of fuel cells. It is well known that at least at European level the massive use of hydrogen for the supply of electricity is desired in future years, with the help of technologies based on fuel cells for electricity generation.

The general conclusion that can be issued is that considering the great variety of types, design and approaches regarding BTMSs, researchers in this field must pay attention to future research and developments in this domain. Applying and integrating the proposed novelty systems and models could improve the thermal and energy efficiency of full-size battery packs.

---

## References

1. Climate Strategies & Targets. Available online: [https://ec.europa.eu/clima/policies/strategies\\_en](https://ec.europa.eu/clima/policies/strategies_en) (accessed on 22 April 2021).
2. EU Climate Action and the European Green Deal. Available online: [https://ec.europa.eu/clima/policies/eu-climate-action\\_en](https://ec.europa.eu/clima/policies/eu-climate-action_en) (accessed on 22 April 2021).
3. Fernandez Pales, A.; Bouckaert, S.; Abergel, T.; Goodson, T. Net Zero by 2050 Hinges on a Global Push to Increase Energy Efficiency; International Energy Agency, France, May 2021. Available online: <https://www.iea.org/reports/net-zero-by-2050>. (accessed on 8 June 2021).
4. Aneke, M.; Wang, M. Energy storage technologies and real life applications—A state of the art review. *Appl. Energy* 2016, 179, 350–377.
5. Bukhari, S.; Maqsood, J.; Baig, M.Q.; Ashraf, S.; Khan, T.A. Comparison of Characteristics—Lead Acid, Nickel Based, Lead Crystal and Lithium Based Batteries. In Proceedings of the 17th UKSim-AMSS International Conference on Modelling and Simulation (UKSim), Cambridge, UK, 25–27 March 2015; pp. 444–450.
6. Naik, I.; Nandgaonkar, M. Review of the approaches and modeling methodology for lithium-ion battery thermal management systems for electric vehicles. In *Advances in Material and Mechanical Engineering, Select Proceedings of ICFTMME 2020*; Pandey, C., Goyat, V., Goel, S., Eds.; Springer Nature Singapore Pte Ltd.: Singapore, 2021; pp. 75–112.
7. Spitthoff, L.; Shearing, P.R.; Burheim, O.S. Temperature, Ageing and Thermal Management of Lithium-Ion Batteries. *Energies* 2021, 14, 1248.
8. Bandhauer, T.M.; Garimella, S.; Fuller, T.F. A critical review of thermal issues in lithium-ion batteries. *J. Electrochem. Soc.* 2011, 15, 1–25.
9. Ianniciello, L.; Biwolé, P.H.; Achard, P. Electric vehicles batteries thermal management systems employing phase change materials. *J. Power Sources* 2018, 378, 383–403.
10. Ma, S.; Jiang, M.; Tao, P.; Song, C.; Wu, J.; Wang, J.; Deng, T.; Shang, W. Temperature effect and thermal impact in lithium-ion batteries: A review. *Prog. Nat. Sci. Mater. Int.* 2018, 28, 653–666.
11. Goutam, S.; Timmermans, J.M.; Omar, N.; Van den Bossche, P.; Van Mierlo, J. Comparative study of surface temperature behavior of commercial li-ion pouch cells of different chemistries and capacities by infrared thermography. *Energies* 2015, 8, 8175–8192.
12. Buchmann, I. Battery University. Available online: <https://batteryuniversity.com/> (accessed on 12 May 2021).
13. Kitoh, K.; Nemoto, H. 100 Wh large size Li-ion batteries and safety tests. *J. Power Sources* 1999, 81–82, 887–890.
14. Ramadass, P.; Haran, B.; White, R.; Popov, B.N. Capacity fade of Sony 18650 cells cycled at elevated temperatures: Part I. Cycling performance. *J. Power Sources* 2002, 112, 606–613.
15. Rugh, J.P.; Pesaran, A.; Smith, K. Electric Vehicle Battery Thermal Issues and Thermal Management Techniques (Presentation); NREL (National Renewable Energy Laboratory): Golden, CO, USA, 2011.
16. Jaguemont, J.; Boulon, L.; Dube, Y.; Martel, F. Thermal Management of a Hybrid Electric Vehicle in Cold Weather. *IEEE Trans. Energy Convers.* 2016, 31, 1110–1120.
17. Peng, X.; Chen, S.; Garg, A.; Bao, N.; Panda, B. A review of the estimation and heating methods for lithium-ion batteries pack at the cold environment. *Energy Sci. Eng.* 2019, 7, 645–662.
18. Jaguemont, J.; Omar, N.; Abdel-Monem, M.; Van den Bossche, P.; Van Mierlo, J. Fast-charging investigation on high-power and high-energy density pouch cells with 3D-thermal model development. *Appl. Therm. Eng.* 2018, 128, 1282–1296.
19. Wang, Q.; Jiang, B.; Li, B.; Yan, Y. A critical review of thermal management models and solutions of lithium-ion batteries for the development of pure electric vehicles. *Renew. Sustain. Energy Rev.* 2016, 64, 106–128.
20. Jaguemont, J.; Boulon, L.; Dubé, Y. A comprehensive review of lithium-ion batteries used in hybrid and electric vehicles at cold temperatures. *Appl. Energy* 2016, 164, 99–114.

21. de Hoog, J.; Jaguemont, J.; Abdel-Monem, M.; Van Den Bossche, P.; Van Mierlo, J.; Omar, N. Combining an Electrothermal and Impedance Aging Model to Investigate Thermal Degradation Caused by Fast Charging. *Energies* 2018, 11, 804.
22. Hammami, A.; Raymond, N.; Armand, M. Lithium-ion batteries: Runaway risk of forming toxic compounds. *Nature* 2003, 424, 635–636.
23. Kim, J.; Oh, J.; Lee, H. Review on battery thermal management system for electric vehicles. *Appl. Therm. Eng.* 2019, 149, 192–212.
24. Cai, H.; Xu, C.; Liao, Y.; Su, L.; Weng, Z. Mass maldistribution research of different internal flowing channels in the cooling plate applied to electric vehicle batteries. *Appl. Sci.* 2019, 9, 636.
25. Han, X.; Lu, L.; Zheng, Y.; Feng, X.; Li, Z.; Li, J.; Ouyang, M. A review on the key issues of the lithium ion battery degradation among the whole life cycle. *eTransportation* 2019, 1, 100005.
26. Larsson, F.; Mellander, B.-E. Abuse by External Heating, Overcharge and Short Circuiting of Commercial Lithium-Ion Battery Cells. *J. Electrochem. Soc.* 2014, 161, A1611–A1617.
27. Feng, X.; Zheng, S.; Ren, D.; He, X.; Wang, L.; Cui, H.; Liu, X.; Jin, C.; Zhang, F.; Xu, C.; et al. Investigating the thermal runaway mechanisms of lithium-ion batteries based on thermal analysis database. *Appl. Energy* 2019, 246, 53–64.
28. Lu, L.; Han, X.; Li, J.; Hua, J.; Ouyang, M. A review on the key issues for lithium-ion battery management in electric vehicles. *J. Power Sources* 2013, 226, 272–288.
29. Iraola, U.; Aizpuru, I.; Gorrotxategi, I.; Segade, J.M.C.; Larrazabal, A.E.; Gil, I. Influence of voltage balancing on the temperature distribution of a li-ion battery module. *IEEE Trans. Energy Convers.* 2015, 30, 507–514.
30. Feng, X.; Xu, C.; He, X.; Wang, L.; Zhang, G.; Ouyang, M. Mechanisms for the evolution of cell variations within a LiNixCoyMnzO2/graphite lithium-ion battery pack caused by temperature non-uniformity. *J. Clean. Prod.* 2018, 205, 447–462.
31. Kuper, C.; Hoh, M.; Houchin-Miller, G.; Fuhr, J. Thermal management of hybrid vehicle battery systems. In Proceedings of the 24th International Battery, Hybrid and Fuel Cell Electric Vehicle Conference and Exhibition (EVS-24), Stavanger, Norway, 13–16 May 2009; pp. 1–10.
32. Pesaran, A.A. Battery Thermal Management in EVs and HEVs: Issues and Solutions. In Proceedings of the Advanced Automotive Battery Conference, Las Vegas, Nevada, USA, 6–8 February 2001; pp. 10–20.
33. Zhou, H.; Zhou, F.; Xu, L.; Kong, J. Thermal performance of cylindrical Lithium-ion battery thermal management system based on air distribution pipe. *Int. J. Heat Mass Transf.* 2019, 131, 984–998.
34. Liu, Y.; Zhang, J. Design a J-type air-based battery thermal management system through surrogate-based optimization. *Appl. Energy* 2019, 252, 113426.
35. Jilte, R.D.; Kumar, R.; Ma, L. Thermal performance of a novel confined flow Li-ion battery module. *Appl. Therm. Eng.* 2019, 146, 1–11.
36. Wu, M.S.; Liu, K.H.; Wang, Y.Y.; Wan, C.C. Heat dissipation design for lithium-ion batteries. *J. Power Sources* 2002, 109, 160–166.
37. Wu, W.; Wang, S.; Wu, W.; Chen, K.; Hong, S.; Lai, Y. A critical review of battery thermal performance and liquid based battery thermal management. *Energy Convers. Manag.* 2019, 182, 262–281.
38. Lai, Y.; Wu, W.; Chen, K.; Wang, S.; Xin, C. A compact and lightweight liquid-cooled thermal management solution for cylindrical lithium-ion power battery pack. *Int. J. Heat Mass Transf.* 2019, 144, 118581.
39. Chen, D.; Jiang, J.; Kim, G.H.; Yang, C.; Pesaran, A. Comparison of different cooling methods for lithium ion battery cells. *Appl. Therm. Eng.* 2016, 94, 846–854.
40. Zhao, C.; Zhang, B.; Zheng, Y.; Huang, S.; Yan, T.; Liu, X. Hybrid Battery Thermal Management System in Electrical Vehicles: A Review. *Energies* 2020, 13, 6257.
41. Lv, Y.; Zhou, D.; Yang, X.; Liu, X.; Li, X.; Zhang, G. Experimental investigation on a novel liquid-cooling strategy by coupling with graphene-modified silica gel for the thermal management of cylindrical battery. *Appl. Therm. Eng.* 2019, 159, 113885.
42. Giuliano, M.R.; Prasad, A.K.; Advani, S.G. Experimental study of an air-cooled thermal management system for high capacity lithium–titanate batteries. *J. Power Sources* 2012, 216, 345–352.
43. Panchal, S.; Khasow, R.; Dincer, I.; Agelin-Chaab, M.; Fraser, R.; Fowler, M. Thermal design and simulation of mini-channel cold plate for water cooled large sized prismatic lithium-ion battery. *Appl. Therm. Eng.* 2017, 122, 80–90.

44. Shang, Z.; Qi, H.; Liu, X.; Ouyang, C.; Wang, Y. Structural optimization of lithium-ion battery for improving thermal performance based on a liquid cooling system. *Int. J. Heat Mass Transf.* 2019, 130, 33–41.
45. Ye, B.; Rubel, M.R.H.; Li, H. Design and optimization of cooling plate for battery module of an electric vehicle. *Appl. Sci.* 2019, 9, 754.
46. Monika, K.; Chakraborty, C.; Roy, S.; Dinda, S.; Singh, S.A.; Datta, S.P. An improved mini-channel based liquid cooling strategy of prismatic LiFePO<sub>4</sub> batteries for electric or hybrid vehicles. *J. Energy Storage* 2021, 35, 102301.
47. Patil, M.S.; Seo, J.H.; Panchal, S.; Jee, S.W.; Lee, M.Y. Investigation on thermal performance of water-cooled Li-ion pouch cell and pack at high discharge rate with U-turn type microchannel cold plate. *Int. J. Heat Mass Transf.* 2020, 155, 119728.
48. Jiang, Z.Y.; Qu, Z.G. Lithium-ion battery thermal management using heat pipe and phase change material during discharge-charge cycle: A comprehensive numerical study. *Appl. Energy* 2019, 242, 378–392.
49. Azizi, Y.; Sadrameli, S.M. Thermal management of a LiFePO<sub>4</sub> battery pack at high temperature environment using a composite of phase change materials and aluminum wire mesh plates. *Energy Convers. Manag.* 2016, 128, 294–302.
50. Zhang, J.; Li, X.; Zhang, G.; Wang, Y.; Guo, J.; Wang, Y.; Huang, Q.; Xiao, C.; Zhong, Z. Characterization and experimental investigation of aluminum nitride-based composite phase change materials for battery thermal management. *Energy Convers. Manag.* 2020, 204, 112319.
51. Zhang, Z.; Li, Y. Experimental study of a passive thermal management system using copper foam-paraffin composite for lithium ion batteries. *Energy Procedia* 2017, 142, 2403–2408.
52. Faghri, A. *Heat Pipe Science & Technology*; Taylor & Francis Group: Abingdon, UK, 1995.
53. Behi, H.; Karimi, D.; Behi, M.; Jaguemont, J.; Ghanbarpour, M.; Behnia, M.; Berecibar, M.; Van Mierlo, J. Thermal management analysis using heat pipe in the high current discharging of lithium-ion battery in electric vehicles. *J. Energy Storage* 2020, 32, 101893.
54. Zhang, Z.; Wei, K. Experimental and numerical study of a passive thermal management system using flat heat pipes for lithium-ion batteries. *Appl. Therm. Eng.* 2020, 166, 114660.
55. Kleiner, J.; Singh, R.; Schmid, M.; Komsiyyska, L.; Elger, G.; Endisch, C. Influence of heat pipe assisted terminal cooling on the thermal behavior of a large prismatic lithium-ion cell during fast charging in electric vehicles. *Appl. Therm. Eng.* 2021, 188, 116328.
56. Liu, F.; Lan, F.; Chen, J. Dynamic thermal characteristics of heat pipe via segmented thermal resistance model for electric vehicle battery cooling. *J. Power Sources* 2016, 321, 57–70.
57. Feng, L.; Zhou, S.; Li, Y.; Wang, Y.; Zhao, Q.; Luo, C.; Wang, G.; Yan, K. Experimental investigation of thermal and strain management for lithium-ion battery pack in heat pipe cooling. *J. Energy Storage* 2018, 16, 84–92.
58. Ye, X.; Zhao, Y.; Quan, Z. Experimental study on heat dissipation for lithium-ion battery based on micro heat pipe array (MHPA). *Appl. Therm. Eng.* 2018, 130, 74–82.
59. Tran, T.H.; Harmand, S.; Desmet, B.; Filangi, S. Experimental investigation on the feasibility of heat pipe cooling for HEV/EV lithium-ion battery. *Appl. Therm. Eng.* 2014, 63, 551–558.
60. Wang, J.; Gan, Y.; Liang, J.; Tan, M.; Li, Y. Sensitivity analysis of factors influencing a heat pipe-based thermal management system for a battery module with cylindrical cells. *Appl. Therm. Eng.* 2019, 151, 475–485.