

Automation System to Autonomous System

Subjects: **Engineering**, **Ocean**

Contributor: Man Zhu

Autonomy is the core capability of future systems, and architecture design is one of the critical issues in system development and implementation. To discuss the architecture of autonomous systems in the future, this paper reviews the developing progress of architectures from automation systems to autonomous systems. Firstly, the autonomy and autonomous systems in different fields are summarized. The article classifies and summarizes the architecture of typical automated systems and infer three suggestions for building an autonomous system architecture: extensibility, evolvability, and collaborability. Accordingly, this paper builds an autonomous waterborne transportation system, and the architecture is composed of the object layer, cyberspace layer, cognition layer, and application layer, the proposed suggestions made in the construction of the architecture are reflected in the inter-relationships at all layers. Through the cooperation of four layers, the autonomous waterborne transportation system can autonomously complete the system functions, such as system control and transportation service. In the end, the characteristics of autonomous systems are concluded, from which the future primary research directions and the challenges of autonomous systems are provided.

autonomous systems

autonomy

architecture

automation system

waterway transportation system

1. Introduction

Industrial development and efficiency requirements have extensively promoted the development of automation technology ^[1]. D.S. Hardt, working as a mechanical engineer at the Ford company in the United States, was the first person putting forward the use of automation to describe the automatic operation steps of the industrial production process in 1946. After the 1950s, automatic control was regarded as an effective technique to improve social production efficiency. It became more popular with various industries, industrial manufacturing automation, metallurgy, and other continuous production process automation.

Meanwhile, business management systems and other industry classifications have been formed. In the early 1960s, the multiple inputs and multiple outputs (MIMO) optimal control problem was seriously investigated, challenging the automation systems. To fix this kind of problem, the modern control theories involved with state-space and dynamic programming as the core was proposed and widely used in the engineering domain, particularly in aerospace. At the same time, some related aspects, including adaptive and stochastic control, system identification, differential game, distributed parameter system, were proposed. In the 1970s, some attention was laid on large-scale and complex systems, such as large-scale ecological environment protection systems,

transportation management systems, and industrial control systems. Moreover, the aim of system control varied from controller optimization and accurate management of systems to forecast and state design of systems for which the cores involved operations research, information theory, and system integration theory. In the 1980s, with the rapid development of communication technology and computer technology, the automation of management systems has made significant progress. New automatic control methods, such as human-machine systems and expert systems, were proposed. These control methods improve the level of management automation and promote the development of management systems.

In the 21st century, with the development of information technology, single technology was difficult to fulfill systems requirements. Therefore, information and communication technology (ICT), including sensor technology, computer, and intelligent technology, communication technology, and control technology, was developed to solve system automation problems. However, due to the increasing complexity of system functions and the diversification of system decision-making, automation technology could not fully meet production needs. The demand for developing autonomy became increasingly vital to alleviate the dependence on human-related interactions, on the other hand, to improve the ability of individuals and systems to complete tasks independently. The development process of the automation system is shown in [Figure 1](#).

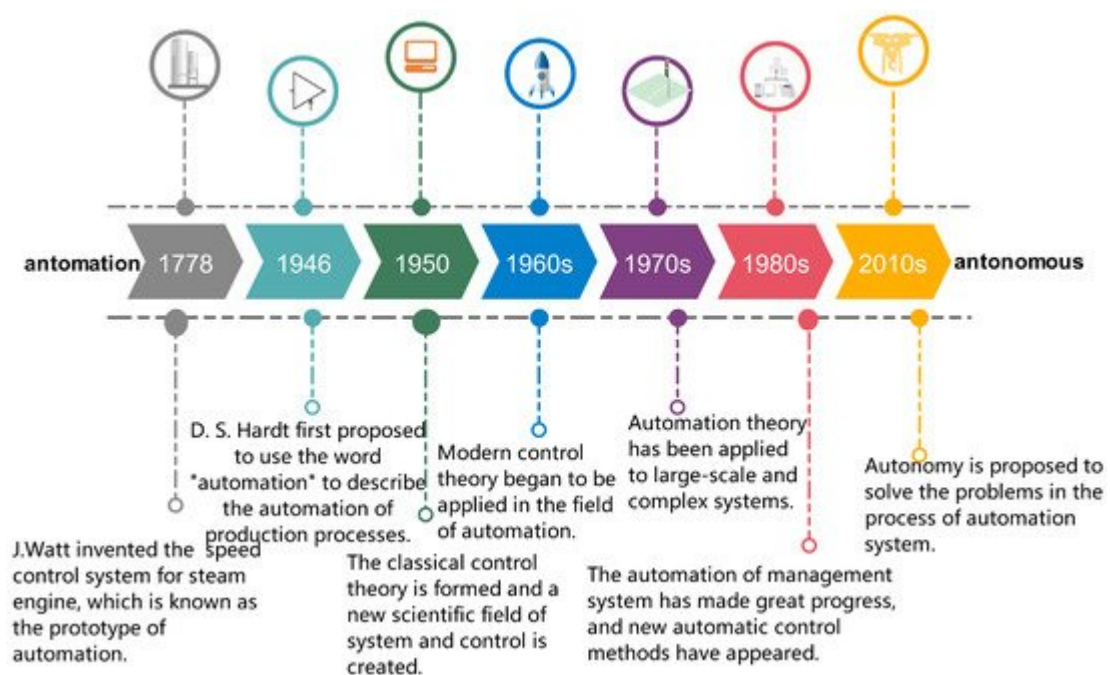


Figure 1. The development of individuals and systems from automation to autonomous.

Afterward, the Defense Science Council of the United States issued a vital guidance document entitled the status of autonomy in the Department of defense unmanned system with obvious goal concerning the improvement of systems' autonomy capability ^[2] in which the importance of autonomous capability for systems, especially for unmanned systems, is highlighted. It can be seen from the above analysis that autonomy has been the hotspot research direction in promising automation, even intelligence of individuals and systems.

At present, the research on the autonomy system mainly includes perception [3], planning [4], decision-making [5], control [6], human-computer interaction [7], and so on. Perception is the key aspect of realizing the autonomy of individuals and systems. Only through perception can systems interact with their environment and achieve the task objectives of the system. Up to date, studies on perception mainly include navigation perception [8], task awareness [9], system state awareness [10], and execution operation perception [11]. To achieve systems goals, it is necessary to plan the current or future actions or states of individuals and systems based on perception information to ensure navigation safety. This task was always done through effective planning, which refers to the process of calculating the sequence or partial sequence of actions that can change the current state into the expected state to achieve the task under the premise of safety [12]. The purpose of decision-making is to make expected cost-efficiency decisions on future actions based on existing information acquired from perception and experience. Machine learning has become one of the most effective methods to decide for intelligent autonomous systems. Generally speaking, it is more effective to obtain information from data than manual knowledge engineering. By looking for reliable patterns from a large number of specific data, the accuracy and robustness of autonomous systems are higher than that of manual software engineering [13], and the system can automatically adapt to the new environment according to the actual operation state [14]. Human-computer interaction is a hot issue in the research of systematic autonomy. It mainly solves how to interact and cooperate among humans with the machine, computer, or other supporting techniques [15]. The investigation laid on the relationship between human and computer system can help to improve system performance, reduce platform design and operation cost, improve the adaptability of existing systems to new environments and new tasks, and speed up the execution of their tasks [16].

System architecture is a discipline used to describe the system's internal structure and elements relationship and guide system design and system construction. On the one hand, the architecture mainly uses the perception module, planning module, function execution module, and information feedback module involved in autonomy development. On the other hand, the hierarchical relationship and logical relationship among the modules need to be defined in the autonomous system architecture. Generally, for such a system architecture [17] several architectures should be considered and designed, including logical architecture, physical architecture, hierarchical architecture, functional architecture, computing architecture, network architecture, software architecture, functional architecture. The architecture of autonomous systems should also define the logical basis, organizational framework foundation, and related model prototype of the system's internal structure. The purpose of architecture design is to support the development of intelligence and the realization of autonomy. Through the design of architecture, the perception ability of the system can be enhanced, the effectiveness and accuracy of the autonomous object design can be improved, and then the actionability of the system to achieve the established goals can be enhanced. Besides, it can enhance the self-adaptive and self-learning ability of the system. Therefore, the research on the architecture of an autonomous system is one of the primary issues of autonomy research. As the system gradually changes from automation to autonomous, the architecture is also changing significantly. Accordingly, this paper classifies the autonomous system architectures and analyzes the critical technologies contained in the architecture.

2. Autonomy and Autonomous System

Automation is the automatic control and operation of an apparatus, process, or system by mechanical or electronic devices that take the place of human labor. The most notable feature of autonomy is characterized by the transfer of decision-making power, which transfers the decision-making power of the whole system from the critical node of the system to the trusted object [18]. The trusted object can act upon the decision under permissions without outside intervention. The most significant difference between an automated and autonomous system is whether the system can self-learn and self-evolution. When a system acts according to the established rules without any error, it is called an automated system, not an autonomous system. To achieve the goal, the autonomous system must be able to accurately perceive and judge the environment, the state of the system, as well as the understanding of the task, to reason the system itself and the situation, and to formulate and select different action processes independently to achieve the relevant goals. Autonomy can be seen as the extension of automation, which is intelligent and automation with higher capabilities. Autonomy has different definitions in different fields, which is summarized in [Table 1](#).

Table 1. Definitions of autonomy in different fields.

Field	Definition of Autonomy
Philosophy [19]	Autonomy is the main characteristic of itself, which is influenced by environment and restricted by intrinsic factors.
Sociology [20]	The characteristics is that a kind of system from internal spontaneous to external promotion, its action does not need to be promoted rely on external forces, and can deal with the situation according to own will.
Control theory [21]	Autonomy is the granting of decision-making power to an object, so that the object has the right to act within a specified scope, that is, autonomy is a decision made independently without outside intervention.
Robotics [22]	Autonomy is the ability of robot system to perceive, to observe, to analyze, to plan, to make decisions, and to take actions automatically.

3. Architecture of Automation System and Autonomous System

3.1. Composition of Architecture

1. Ouellette, R.P.; Thomas, L.; Mangold, E.; Cheremisinoff, P. Automation Impacts on Industry; Butterworth Publishers: Oxford, UK, 1983; Volume 186, pp. 263–272.

From the view of system modeling, system architecture design covers several related significant models, including system logic model, system function model, task model, organizational structure model, etc. Among these models,

2. Murphy, R.; Shields, J. The Role of Autonomy in DoD Systems. In Defense Science Board, CreateSpace Independent Publishing Platform: Scotts Valley, CA, USA, 2012; p. 19.

the system logic model is determined mainly by accounting for the internal relationship among the system's physical elements. The system architecture is a comprehensive and essential base to model and implement

3. Rosique, F.; Navarro, P.J.; Fernández, C.; Padilla, A. A systematic review of perception system and simulators for autonomous vehicles research. *Sensors* 2019, 19, 648.

4. Ma, A.; Heide, W.; Gabelbeck, M.; Horn, G.S.; Promies, A.; Schke, A.; Schemmel, J.; Seifert, R.; Grottel, P.; Dierker, B.; Janicki, M. Robot task planning and explanation in open and uncertain worlds. *Artif. Intell. Law* 2017, 24, 119–150.
5. Czubenko, M.; Kowalczyk, Z.; Ordys, A. Autonomous Driver Based on an Intelligent System of Decision-Making. *Cogn. Comput.* 2015, 7, 569–581.
6. Kocer, B.B.; Tizhnowoda, T.; Seet, G.G.L. Model predictive way-tool interaction control enhanced by external forces. *Mechatronics* 2019, 58, 47–57.
7. Grudin, J. From tool to partner: The evolution of human-computer interaction. *Synth. Lect. Hum.-Centered Interact.* 2017, 10, 183.
8. Jung, S.; Hwang, S.; Shin, H.; Shim, D.H. Perception, guidance, and navigation for indoor autonomous drone racing using deep learning. *IEEE Robot. Autom. Lett.* 2018, 3, 2539–2544.
9. Geraides, R.; Goncalves, A.; Lai, T.; Villerabel, M.; Prendinger, H. UAV-based Situational Awareness System Using Deep Learning. *IEEE Access* 2019, 7, 122583–122594.
10. Diab, M.; Pomarlan, M.; Beßler, D.; Akbari, A.; Rosell, J.; Bateman, J.; Beetz, M. SkillMan-A skill-based robotic manipulation framework based on perception and reasoning. *Robot. Auton. Syst.* 2020, 134, 103653.
11. Whitlow, S.D.; Dillard, M.B. Intelligent Modules and Advanced Displays to Support Pilot Airplane System State Awareness. In *Proceedings of the 2019 IEEE/AIAA 38th Digital Avionics Systems Conference (DASC)*, San Diego, CA, USA, 8–12 September 2019; pp. 1–7.
12. Chakraborti, T.; Sreedharan, S.; Kulkarni, A.; Kambhampati, S. Projection-aware task planning and execution for human-in-the-loop operation of robots in a mixed-reality workspace. In *Proceedings of the 2018 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, Madrid, Spain, 1–5 October 2018; pp. 4476–4482.
13. Yan, F.; Di, K.; Huang, J.; Wang, Y.; Fan, H. Efficient decision-making for autonomous target searching architecture focuses in the logical relationship with the system. *Robot. Auton. Syst.* 2019, 114, 41–56.
14. Patel, N.; Choromanska, A.; Krishnamurthy, P.; Khorrami, F. A deep learning gated architecture for UGV navigation robust to sensor failures. *Robot. Auton. Syst.* 2019, 116, 80–97.
15. Dong, B.; Yang, Y.; Shi, Q.; Xu, S.; Sun, Z.; Zhu, S.; Zhang, Z.; Kwong, D.L.; Zhou, G.; Ang, K.W.; et al. Wearable Triboelectric–Human–Machine Interface (THMI) Using Robust Nanophotonic Readout. *ACS Nano* 2020, 14, 8915–8930.
16. Kun, A.L. Human-machine interaction for vehicles: Review and outlook. *Found. Trends® Hum.-Interact.* 2018, 11, 201–293.
17. Fernandez, F.; Sanchez, A.; Velez, J.F.; Moreno, B. Associated Reality: A cognitive Human–Machine Layer for autonomous driving. *Robot. Auton. Syst.* 2020, 133, 103624.

18. Veres, S.M.; Molnar, L.; Lincoln, N.K.; Morice, G.P. Autonomous vehicle control systems—A review of decision making. *Proc. Inst. Mech. Eng. Part I J. Syst. Control. Eng.* 2011, 225, 155–195.
19. Chene, A. The concept of autonomy in adult education: A philosophical discussion. *Adult Educ. Q.* 1983, 34, 38–47.
20. Bonefeld, W.; Papadopoulos, K. *Human Dignity: Social Autonomy and the Critique of Capitalism*; Routledge: Thames, UK, 2017; Volume 6, pp. 125–141.
21. Pachter, M.; Chandler, P.R. Challenges of autonomous control. *IEEE Control Syst. Mag.* 1998, 18, 92–97.
22. Olszewska, J.I.; Barreto, M.; Bermejo-Alonso, J.; Carbonera, J.; Chibani, A.; Florini, S.; Goncalves, P.; Habib, M.; Khamis, A.; Olivares, A.; et al. Ontology for autonomous robotics. In *Proceedings of the 2017 26th IEEE International Symposium on Robot and Human Interactive Communication (RO-MAN)*, Lisbon, Portugal, 28–31 August 2017; pp. 189–194.
- Figure 2.** The typical composition of system architecture.
23. Amdahl, G.M.; Blaauw, G.A.; Brooks, F.P. Architecture of the IBM System/360. *IBM J. Res. Dev.* 1964, 8, 87–101.
24. Qiu, T.; Zhao, Z.; Zhang, T.; Chen, C.; Chen, G.P. Underwater Internet of Things in smart ocean: System architecture and open issues. *IEEE Trans. Ind. Inform.* 2019, 16, 4297–4307.
25. Collins, A.M.; Quillian, M.R. Retrieval time from semantic memory. *J. Verbal Learn. Verbal Behav.* 1969, 8, 220–227.
26. Broadbent, G. *Design in Architecture: Architecture and the Human Sciences*; John Wiley & Sons: New York, NY, USA, 1973.
27. Zhang, X.; Zhou, M.; Liu, H.; Hussain, A. A cognitively inspired system architecture for the Mengshi cognitive vehicle. *Comput. Comput.* 2020, 12, 140–149.
- Figure 3.** The development process of system architecture.
28. Heinzelman, W.B.; Chandrakasan, A.P.; Balakrishnan, H. An application-specific protocol architecture for wireless microsensor networks. *IEEE Trans. Wirel. Commun.* 2002, 1, 660–670.
29. Foschini, G.J. Layered space-time architecture for wireless communication in a fading environment when using multiple antennas. *Bell Labs Tech. J.* 1996, 1, 41–59.
30. Bampis, L.; Gasteratos, A. Revisiting the bag-of-visual-words model: A hierarchical localization architecture for mobile systems. *Robot. Auton. Syst.* 2019, 113, 104–119.
- 3.2. Representative Architecture of Automation System**
31. Santos, N.; Pereira, J.; Morais, F.; Barros, J.; Ferreira, N.; Machado, R.J. An agile modeling A robot system is a standard and simple automation system. As a representative form of the automation system, oriented process for logical architecture design. In *Enterprise, Business-Process and Information Systems Modeling*; Springer: Berlin, Germany, 2018; pp. 260–275.
36. According to the different combination forms of the three subsystems, they can be divided into knowledge-

32. Jiménez, J.M.; Vingerhoeds, R. A System Engineering Approach to Predictive Maintenance (also known as Systems Failure modes and types effects analysis) and logical architecture. In Proceedings of the 2019 International Symposium on Systems Engineering (ISSE), Scotland, UK, 1–3 October 2019; pp. 1–8.

At present, knowledge-based architecture is accepted as the prominent architecture of the Robot system, this kind of system architecture inspired by human cognition of knowledge. Human cognition usually contains the following processes: perceiving surrounding information; modeling the body model for its kinematic equation and dynamic equation; planning the tasks; executing the instruction; and repeating from perception module. The implementation

33. Maranhão, J.S. A logical architecture for dynamic legal interpretation. In Proceedings of the 16th International Conference on Artificial Intelligence and Law, London, UK, 12–16 June 2017; pp. 129–138.
34. Dim, S.; Paul, A.; Rehman, A. 5G Enabled Hierarchical architecture for software defined intelligent-based transportation systems. *Comput. Netw.* **2019**, *150*, 81–89.

35. Abdoli, S.; Kara, S. A modelling framework to design executable logical architecture of engineering systems. *Mod. Appl. Sci.* **2017**, *11*, 75.

36. Huang, J.; Zhou, N.; Cao, M. Adaptive fuzzy behavioral control of second-order autonomous agents with prioritized missions: Theory and experiments. *IEEE Trans. Ind. Electron.* **2019**, *66*, 9612–9622.

37. Tripathi, K. A review on knowledge-based expert system: Concept and architecture. *IJCA Spec. Issue Artif. Intell. Tech.-Nov. Approaches Pract. Appl.* **2011**, *4*, 19–23.

38. Parisi, G.I.; Kanan, C. Rethinking Continual Learning for Autonomous Agents and Robots. *arXiv* **2019**, arXiv:1907.01929.

39. Fadeev, A.; Zarnitsyn, A.; Tsavin, A.; Belyaev, A. Cyber Physical System Prototype Development for Control of Mobile Robots Group for General Mission Accomplishment. In *AIP Conference Proceedings*; AIP Publishing LLC: Melville, NY, USA, 2019; Volume 2195, p. 020020.

40. Toapanta, A.; Quinaluisa, F.; Carrera, A.; Rivera, H.; Escobar, L.; Matovelle, D.L. Design of an Autonomous Mobile Robot as a Base Platform for Research of Cyber Physical Systems. In Proceedings of the International Conference on Applied Technologies, Quito, Ecuador, 3–5 December 2019; pp. 204–216.

41. Nakhmiev, D.; Paryes, P.; Hong, T.S.; Karisfar, B. A hybrid control architecture for autonomous mobile robot navigation in the task. In *Proceedings of the 2015 IEEE International Conference on Automation Science and Engineering (CASE)*, Gothenburg, Sweden, 24–28 August 2015; pp. 1274–1281.

42. Gallinucci, E.; Golfarelli, M.; Rizzi, S. A hybrid architecture for tactical and strategic precision agriculture. In Proceedings of the International Conference on Big Data Analytics and Knowledge Discovery, Linz, Austria, 26–29 August 2019; pp. 13–23.

43. Bing, G.; Tian, W.; Wen, Y. Cloud robotics architecture, challenges and applications. *IEEE Netw.* **2012**, *26*, 21–28.
- At present, knowledge-based architecture is accepted as the prominent architecture of the Robot system, this kind of system architecture inspired by human cognition of knowledge. Human cognition usually contains the following processes: perceiving surrounding information; modeling the body model for its kinematic equation and dynamic equation; planning the tasks; executing the instruction; and repeating from perception module. The implementation depends on the hardware conditions of the system. Due to the weak computing power, there will be an unavoidable delay in the control loop of the system, which leads to the lack of real-time and flexibility of the system.

42. Kehoe, B.; Patel, S.; Abbeel, P.; Goldberg, K. A survey of research on cloud robotics and automation. *IEEE Trans. Autom. Sci. Eng.* 2015, 12, 898–400.
43. Wan, J.; Tang, S.; Yan, H.; Li, D.; Wang, S.; Vasilakos, A.V. Cloud robotics: Current status and open issues. *IEEE Access* 2016, 4, 2797–2807.
44. Leamon, J.M. *Autonomous Horizons: The Way Forward in Air Space Power*; 2020, as shown as inclusive architecture ^[40].
45. Wan, J.; Tang, S.; Yan, H.; Li, D.; Wang, S.; Vasilakos, A.V. Cloud robotics: Current status and open issues. *IEEE Access* 2016, 4, 2797–2807.
46. Leamon, J.M. *Autonomous Horizons: The Way Forward in Air Space Power*; 2020, as shown as inclusive architecture ^[40].
47. Cai, G.; Lum, K.Y.; Chen, B.M.; Lee, T.H. A brief overview on miniature fixed-wing unmanned aerial vehicles. In *Proceedings of the IEEE ICCA 2010, Xiamen, China, 9–11 June 2010*; pp. 285–290.
48. Theron, A.; Kott, A.; Drašić, M.; Rada, K.; Blane, B.; Pinelgas, M.; Manning, L.; Parics, A. Towards an active autonomous and intelligent cyber defense of military systems. In *Proceedings of the 2018 International Conference on Military Communications and Information Systems (COMSIS), Warsaw, Poland, 22–23 May 2018*; pp. 1–9.
49. Ulyanov, S.; Maksimkin, N. Formation path-following control of multi-AUV systems with independent behavior and can independently control the intelligent robot to generate corresponding motion. *Math. Eng. Sci. Aerosp.* 2019, 10, 487–500.
50. Kassan, S.; Gaher, J.; Lyngby, P. Autonomous energy management system achieving piezoelectric energy harvesting in wireless sensors. *Mod. Netw. Appl.* 2020, 25, 794–805.
51. Ochs, M.; Blache, P.; de Montcheuil, G.M.; Pergandi, J.M.; Saubesty, J.; Francon, D.; Mestre, D. A semi-autonomous system for creating a human-machine interaction corpus in virtual reality: Application to the ACORFORMed system for training doctors to break bad news. In *Proceedings of the Eleventh International Conference on Language Resources and Evaluation (LREC 2018), Miyazaki, Japan, 7–12 May 2018*.
52. Haas, G.; Owens, J.; Spangler, J. A Platform for Developing Autonomy Technologies for Small Military Robots; Technical Report; Army Research Laboratory: Adelphi, MD, USA, 2008.
53. Lewis, L. Insights for the Third Offset: Addressing Challenges of Autonomy and Artificial Intelligence in Military Operations; Technical Report; Center for Naval Analyses Arlington: Arlington, VA, USA, 2017.

Retrieved from <https://encyclopedia.pub/entry/history/show/26002>

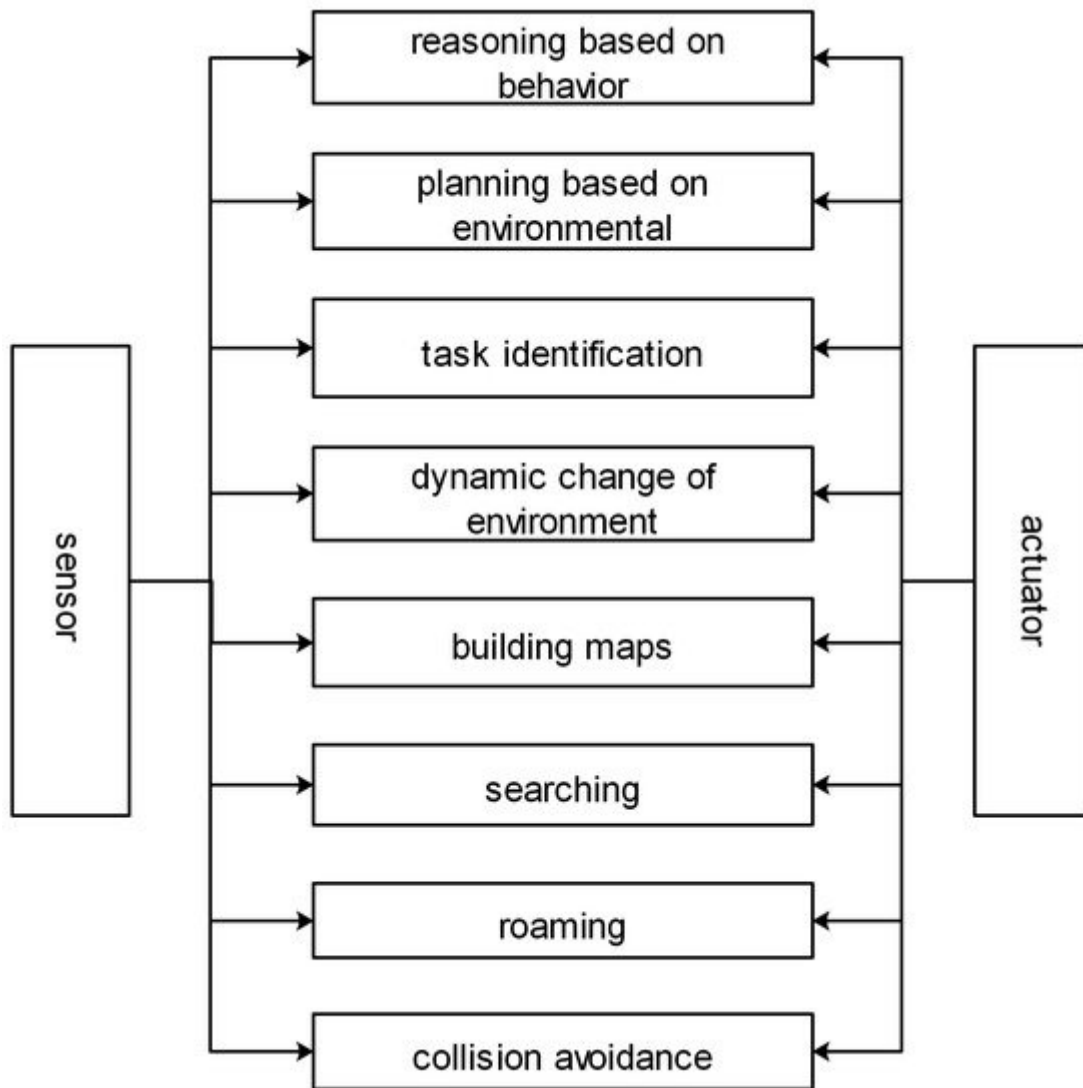


Figure 5. The behavior-based architecture.

In this architecture, the basic behavior is relatively simple and fixed. So, it needs less physical resources and can respond to the rapidly changing environment and task information. The whole system can also be very flexible to achieve complex tasks. A specific layer completes each action, and each level contains the complete path of perception, planning, execution, etc.

What is more, there is an entirely parallel structure of all levels. The advantage of the parallel structure is that, even if one module fails, the other control loops can still work typically and perform the given actions. Therefore, the behavior-based architecture can improve the system's survivability and enhance the system's ability to complete the task.

Both knowledge-based architecture and behavior-based architecture have some limitations. The system using knowledge-based architecture components is relatively lacking in real-time and task diversity. While the behavior-based architecture improves the system's real-time performance and action response, its system is challenging to implement. Combining the advantages of the two architectures seems to be a good solution. Thus, some scholars

proposed a hybrid architecture [41]. The goal of hybrid architecture design is to combine the advantages of the two kinds of architecture, that is, simple hierarchical structure and fast response speed of behavior-based architecture [42].

A typical hybrid architecture, such as CASIA-I, is proposed by researchers from the Chinese Academy of Sciences, and an indoor mobile robot is designed based on the hybrid architecture. Researchers integrate two architectures, where the structure includes the human-computer interaction layer, task planning layer, map database, and behavior control layer.

Hybrid architecture is currently becoming a significant development trend of autonomous individual architecture, but many problems are still to be solved. First of all is the coordination and implementation among different levels, especially the coordination between knowledge-based behavior and reactive behavior. The second is how to adapt the hybrid architecture to the dynamic environment. The third is how to supervise the individual's execution, find problems in time, and improve the individual's performance.

When scenes and robots change rapidly, intelligent robots cannot perceive the scene timely due to the limitation of sensors and computing power. When the system's hardware cannot meet the requirements of calculation, the real-time performance of the system will be seriously affected. To solve the problem, Dr. Kuffner from Carnegie Mellon University proposed a concept of "cloud robotics" in 2010 [43]. The cloud robot is a combination of cloud computing and intelligent robot, moving the computing power of the robot to the cloud [44]. When the intelligent robot needs to process the information, it connects to the corresponding cloud server and processes it. The results are sent back to the robot through the network [45].

Compared with local robots, the cloud robot moves complex information perception acquisition and information processing computing tasks to the cloud service, which has lower requirements on local software and hardware in the local robot. At the same time, by connecting with the cloud, it can also receive the relevant data of other intelligent robots, realize information sharing, and enhance the learning ability of intelligent robots through information interaction. Through cloud connection, information sharing between intelligent robots will be faster and more convenient. The cloud robot architecture is shown in Figure 6.

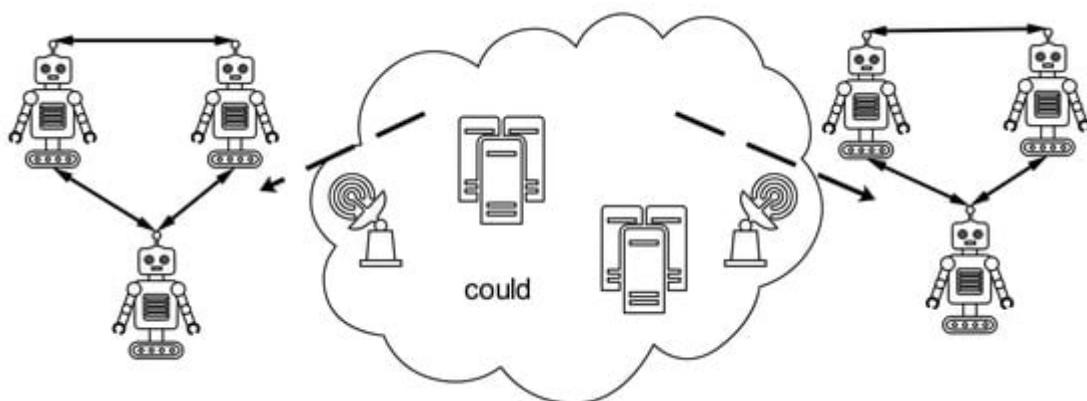


Figure 6. The architecture of cloud robot.

The four structural characteristics of the automation system are summarized in [Table 3](#).

Table 3. Comparison of architecture characteristics of automation system.

Type	Characteristic	Deficiency
Knowledge-based	The order of each functional modules is clear, that is conducive to design and easy to implement.	Concatenate structure: lack of reliability and the real-time performance of action.
Behavior-based	Parallel structure, which is high- response, robust, and flexible.	It is difficult to design, and it is not easy to coordinate between modules.
Hybrid	Not only ensuring the real-time and task diversity, but also having a relatively simple structure and easy to implement.	The design of system is very difficult, which is only feasible for simple individuals. Moreover, transition redundancy, system simplicity is not high.
Cloud robot	The complex computing tasks are unloaded to the cloud to improve the ability of information sharing and task execution among individuals.	The cost of information sharing is high, and it is highly dependent on network quality.

3.3. Transformation of Architecture from Automation System to Autonomous System

The autonomous system refers to the system which can deal with the non-programmed or non-present situation and has self-management and self-guidance ability. The office of the chief scientist of the U.S. Air Force has issued a document to plan the future development of the autonomous system [\[46\]](#) to clarify the role of autonomous systems in future systems. The system's autonomy means that the system has the characteristics of self-management ability in a complex changing environment and non-present situation. Compared with traditional automation systems or a semi-autonomous system, the autonomous system can realize self-learning and self-adaptive ability in the face of a more complex and time-varying environment and has a broader application prospect, such as the aerospace field [\[47\]](#), military field [\[48\]](#), and mechanical engineering field [\[49\]](#).

In an autonomous system, autonomy refers to the application of advanced software algorithms, a variety of heterogeneous sensors, and other hardware facilities so that the system can interact with individuals and the environment through limited communication for a long time. It only needs to issue the necessary task instructions without other external intervention to independently complete the task independently and independently adjust the system in an unknown environment. A fully autonomous system cannot be realized at the present stage, and the vast majority of systems require people to participate in decision-making and supervision.

The level of transformation is relatively low. In the existing research, most of the systems are semi-autonomous to some extent. In the future, full autonomy is the ultimate destination of the control field. With the development of autonomous systems, the emphasis of human operators moves from low-level decision-making to high-level tasks, including the overall task arrangement and coordination. In the future, these systems may contain more

autonomous functionalities, human participation in decision-making is less and less, the weight of human decision-making is higher and higher at the regular operation of the system, and the system will gradually transition to full autonomy. The extension from the classical control system to the autonomous control system is shown in [Figure 7](#).

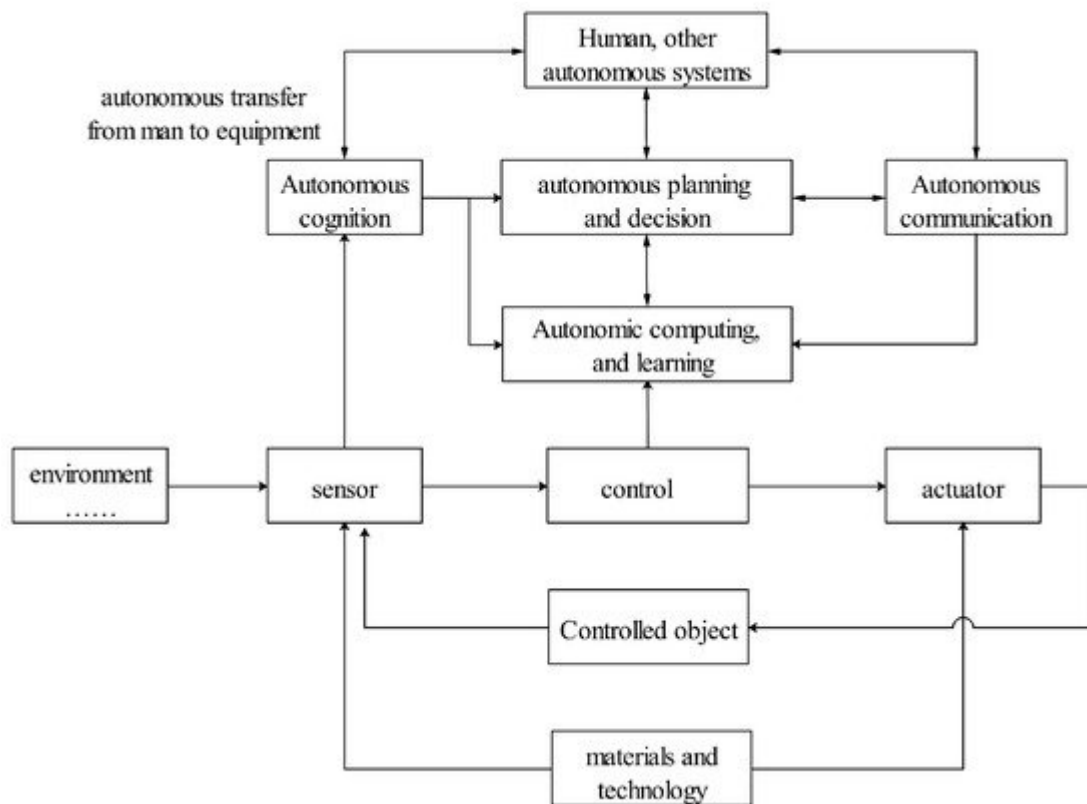


Figure 7. Extension from classical automatic system to autonomous system.

The classic semi-autonomous system [\[50\]](#) is a closed-loop system composed of sensors, decision-makers, controllers, actuators, and control objects under specific environmental conditions. A large number of intelligent algorithms will be used in the system to organically combine with the emerging factors, such as perception, planning, decision-making, computing, and communication, to greatly enhance and expand the autonomous ability of the system [\[51\]](#). The semi-autonomous system can also interact with systems of different autonomous levels, including human beings, and even realize the transfer of intelligence from human to equipment.

At present, the military field [\[52\]](#) is the most widely used field of unmanned systems, and it is also the field closest to the application of the autonomous system. DARPA, together with ABC and Hopkins University, studied the standard operating system (COS) of the joint unmanned air combat system [\[53\]](#). Different types of UAV (Unmanned Aerial Vehicle), UAV ground control station, and communication satellite are integrated into an organic whole, which can effectively share information among members and make planning and decision at the system level and platform level, resulting in the networked operation between multiple platforms. The system framework is shown in [Figure 8](#).



Figure 8. Common operation system.