

# Hydrogen Economy

Subjects: [Electrochemistry](#) | [Engineering, Chemical](#) | [Energy & Fuels](#)

Contributor: Diogo Santos , Ana Lourenço dos Santos , Maria-João Cebola

Environmental issues make the quest for better and cleaner energy sources a priority. Worldwide, researchers and companies are continuously working on this matter, taking one of two approaches: either finding new energy sources or improving the efficiency of existing ones. Hydrogen is a well-known energy carrier due to its high energy content, but a somewhat elusive one for being a gas with low molecular weight. The so-called "Hydrogen Economy" is based on the use of hydrogen as an energy source. This entry examines the current electrolysis processes for obtaining hydrogen, with an emphasis on alkaline water electrolysis.

alkaline water electrolysis

hydrogen

electrolyzers

overpotential

## 1. Introduction

Nowadays, energy is at the top of everybody's needs and concerns. Never before has the consumption of energy been so high, and never before has the impact of the use of that energy been as intense and negative on the planet as a whole.

Growing energy demand due to population increase poses a serious threat to the global economy, environment, and consequent climate change <sup>[1]</sup>. Currently, fossil fuels are the principal resources used to obtain energy. However, these sources are non-renewable, and they have been exploited on such a large scale for the past 200 years that their reserves are due to run out: in 50 to 60 years for oil and gas, and 150 to 200 years for coal, according to recent forecasts <sup>[2]</sup>. Furthermore, the pollution resulting from the consumption of fossil fuels is a major issue that must be taken into consideration. Consequently, renewable energy resources, such as solar energy, wind, or wave power, have attracted considerable attention as an alternative response to increasing energy demand, without causing a major environmental impact. Besides cost issues, there are, however, some technical problems, related to energy fluctuations produced by renewable sources that lead to low energy delivery efficiencies and thereby limit their large-scale applications. To take advantage of all the energy produced from these sources, it is crucial to find a solution to storing the energy produced in excess when there is a peak of production, and to make it available to be consumed at a time when consumption exceeds production <sup>[3]</sup>.

Hydrogen is seen as a key component to overcome this issue due to its high energy yield, high gravimetric energy density, relatively high abundance on earth, and zero emissions during consumption. Being an energy carrier, it is as clean as the method employed in its production, so producing hydrogen by splitting water using electricity generated from renewable sources has many advantages. Its use not only benefits from the abundance of water resources but also the zero pollutant emissions generated. In addition, the hydrogen obtained has a high level of


purity of 99.99% [4][5]. However, only 4% of the total hydrogen currently produced comes from the electrolysis of water. Most hydrogen produced comes from fossil fuels, specifically from the steam reforming of natural gas (48%) followed by oil and coal gasification (30% and 18%, respectively) [6]. This is because the hydrogen produced from the electrolysis of water must compete with the relatively low prices of the hydrogen produced from fossil fuel-based techniques. Nevertheless, hydrogen is seen as a promising approach to compete with fossil fuels and to end the planet's energy dependency on them, so that it has become an item on the political agenda. For instance, the European Commission launched its Clean Hydrogen Alliance in July 2020 to seek the commitment of European Union countries to large-scale hydrogen production. The aim is for this production to be attained via electrolysis but, given that this process is still very expensive, production from natural gas is also allowed. Thus, large efforts are being put towards increasing the efficiency of electrolysis.

## 2. Water Electrolysis

In the electrolysis of water, a direct current (DC) is applied and electrons flow from the negative terminal of the DC source to the cathode. There, the electrons are consumed by hydrogen ions existing in the water, and hydrogen gas is formed. To keep the charge balance in the cell, the hydroxide ions resulting from the cathodic reaction move towards the anode surface, where they lose electrons (that return to the positive terminal of the DC source) and oxygen is formed [7][8]. The overall reaction of water electrolysis is represented by Equation (1).



The main water electrolysis technologies available are alkaline water electrolysis (AWE), proton exchange membrane (PEM) electrolysis, and the solid oxide electrolyzer cell (SOEC) [9][10]. A scheme of these different technologies is presented in [Figure 1](#).

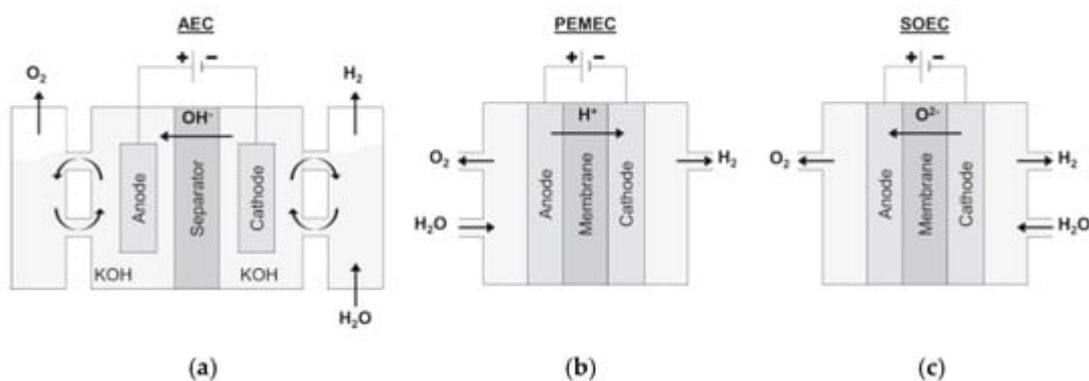

**Figure 1.** Schematic representation of (a) an AWE cell, (b) a PEM electrolysis cell, and (c) a SOEC. Reprinted from [9] with permission from Elsevier.

AWE is the oldest and most well-established technique. The cell consists of an anode and a cathode immersed in an alkaline solution, separated by a diaphragm. The hydrogen evolution reaction (HER) at the cathode and the

oxygen evolution reaction (OER) at the anode are represented by Equations (2) and (3), respectively [7][8].



PEM electrolysis is a less mature technique than AWE. PEM electrolysis cells are similar to AWE cells, but instead of an alkaline aqueous electrolyte, they have a solid polymer electrolyte membrane with an acidic nature. The membrane, along with the electrodes, forms what is called the membrane electrode assembly (MEA). In this case, the two characteristic half-reactions for HER and OER are given by Equations (4) and (5), respectively [10][11].



As an alternative to PEM electrolysis, recent studies focused on the use of anion-exchange membranes (AEMs) for the development of a new technology known as AEM water electrolysis. These devices have a structure similar to PEM electrolyzers, but the membrane is selective to the transport of anions,  $\text{OH}^-$ , instead of protons,  $\text{H}^+$ . AEM water electrolyzers can either be fed by pure water, concentrated KOH solution, or diluted  $\text{K}_2\text{CO}_3$  solution. The electrode reactions are the same as those shown for AWE (Equations (2) and (3)) [12].

SOEC is the least developed electrolysis technology, and it is not yet available for commercialization. What distinguishes this technique from the other two, is that it is performed at much higher temperatures, as can be seen in [Table 1](#), where the main features of the three processes are compared. A SOEC performs the electrolysis of water vapor at high temperatures, resulting in higher efficiencies compared to the other techniques. The reactions occurring at the cathode and the anode are given by Equations (6) and (7), respectively [10][13].



**Table 1.** Main specifications of the different electrolysis technologies. Adapted from [3][9] with permission from Elsevier.

Specifications	AWE	PEM	SOEC
Operating temperature (°C)	60–80	50–84	650–1000
Operating pressure (MPa)	<3	<3	<3
Current density ( $\text{A cm}^{-2}$ )	0.2–0.5	0.6–2.2	0.3–2.0
Cell voltage (V)	1.8–2.4	1.8–2.2	0.7–1.5

Specifications	AWE	PEM	SOEC
Voltage efficiency (%)	62–82	67–82	81–86
Production rate (m <sup>3</sup> H <sub>2</sub> h <sup>-1</sup> )	<760	<40	<40
Specific system energy consumption (kWh Nm <sup>-3</sup> )	4.3–4.8	4.4–5	2.5–3.5
Hydrogen purity (%)	99.7–99.9	99.999	99.9
Cell area (m <sup>2</sup> )	3–3.6	<0.13	<0.06
Minimum partial load (%)	10–40	0–10	-
Stack lifetime (kh)	55–120	60–100	8–20
System lifetime (years)	20–30	10–20	-
System response	s	ms	s
Cold-start time (min)	<60	<15	<60
Capital cost * (€ kW <sup>-1</sup> )	620–1170	1090–1650	>1560

The decomposition of water into hydrogen and oxygen is not thermodynamically favorable. To accomplish it, a potential difference between the anode and cathode must be applied, called the equilibrium or reversible cell potential ( $E_{cell}^e$ ). Under standard conditions (ambient temperature of 25 °C and atmospheric pressure) the  $\Delta H_{cell}$  is 286 kJ mol<sup>-1</sup> of H<sub>2</sub> and the  $\Delta G_{cell}$  is 238 kJ mol<sup>-1</sup> of H<sub>2</sub>. The difference between the two values arises because the

AWE, PEM electrolysis, and SOEC technologies are at different stages of commercialization. As mentioned, the SOEC is still being developed at a laboratory scale, so it will not be the focus of this review. The mature AWE and PEM technologies have already reached the commercialization stage. AWE electrolyzers, being around the longest, are sold in greater numbers despite some superior characteristics offered by PEM. As can be seen in

When the system is isolated, the entropy increase of the system cannot be achieved by absorption of heat from the surroundings, so all the energy has to come from an electrical source, which means that it is necessary to apply a higher potential difference. The total electrical energy required to maintain an electrochemical reaction without

generation or absorption of heat at a specific temperature is called the thermoneutral voltage,  $E_{tn}$ , which is at standard conditions, 1.48 V ( $\Delta H_{cell}/nF$ ). Although  $E_{cell}$  is the theoretical minimum cell voltage required to

operate in adiabatic conditions, i.e., with a net zero heat balance between the thermal energy transferred to the cell and produced by the cell. Above  $E_{tn}$ , the reaction becomes exothermic, and heat is generated. This means that, in practice, all water electrolyzers must operate above the  $E_{tn}$ .

While in AWE, non-noble metals, such as nickel (Ni), are suitable electrocatalysts for HER and OER, in PEM electrolysis, the acidic character of the electrolyte implies the use of precious metals as electrocatalysts for the reactions to occur, which increases the investment.

When operating at non-standard conditions, the cell potential must be calculated from the Nernst equation, Equation (8) for the two electrode reactions.


Over the years, several authors have compared both technologies. Schalenbach et al. compared an AWE electrolyzer using Ni-based catalysts and a thinner separator with a PEM electrolyzer using iridium (Ir) and platinum (Pt)-b

normally used (or thinner than

$$E_{cell} = E_{cell}^e + \frac{RT}{nF} \ln \frac{a_{H_2}^2 a_{O_2}}{a_{H_2O}^2} \quad (8)$$

Figure 1a are the activities of the reactor and products. Reprinted from [8] with permission from Elsevier. [19] different companies and analyzed AWE and PEM technologies regarding the economic aspects of scale, production capacity, and all costs related to the production of H<sub>2</sub>. They conclude that, among the 16 electrolyzers, PEM had a slight advantage in terms of efficiency, 57.64%<sub>LHV</sub> in comparison to AWE electrolyzers, 52.62%<sub>LHV</sub>, but suffered from higher efficiency degradation. (Figure 2) and constitute the overpotential, which is defined as the difference between the theoretical cell potential (i.e. the equilibrium cell potential, E<sup>o</sup>) and the actual cell potential that is necessary to drive the reaction. The lower costs associated with this technology compensate for the slightly better efficiency of PEM. [15][20].

$$\eta = E_{\text{cell}} - E_{\text{cell}}^e \tag{9}$$

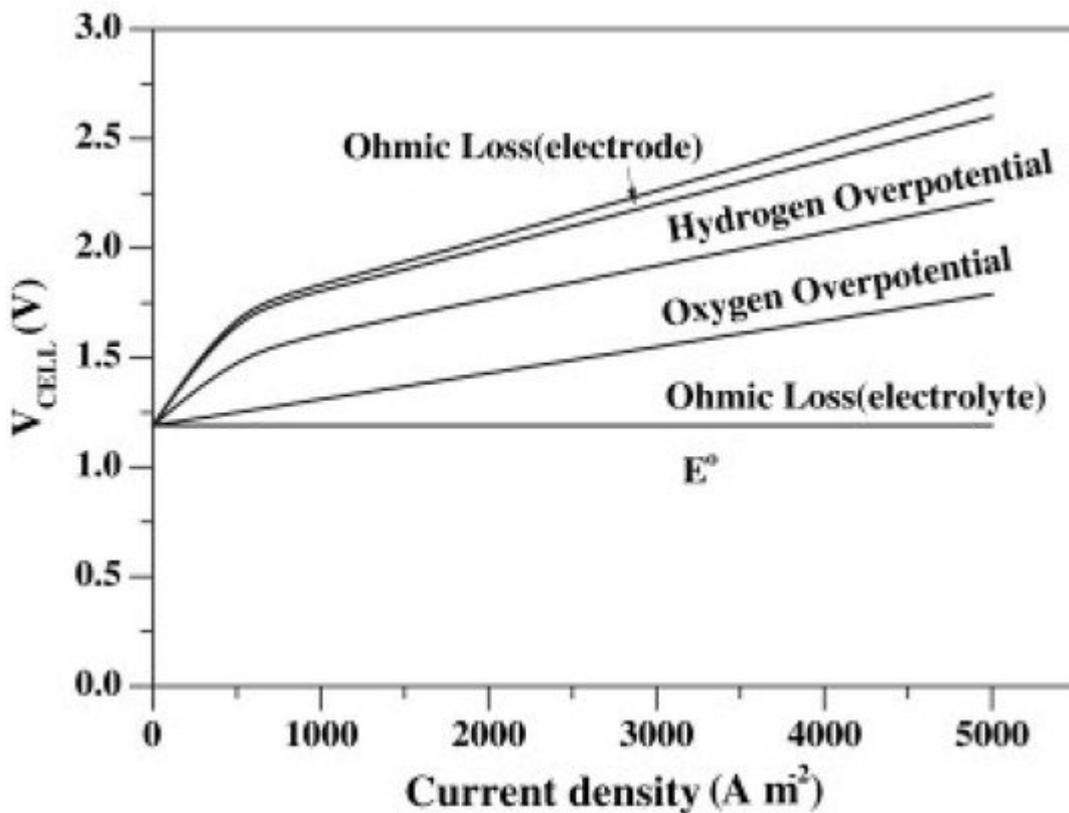

**Figure 2.** Composition of the typical cell voltage of an AWE cell. Reprinted from [8] with permission from Elsevier.

Overpotential can be divided into three major categories: ohmic overpotential,  $\eta_o$ , activation overpotential,  $\eta_a$ , and concentration overpotential,  $\eta_c$ . Therefore, the total overpotential of the electrochemical cell is the sum of these three contributions, Equation (10) [21].

$$\eta = \eta_o + \eta_a + \eta_c \tag{10}$$

### 3.1. Ohmic Overpotential

Ohmic overpotential is related to the ohmic internal resistance,  $R$ , of the cell, which combines the resistances of the electrode, the electrolyte solution, the diaphragm, the connection wires, and those induced by hydrogen and oxygen bubbles. This means that the overpotential arises from the ionic resistance of the solution (related to its conductivity) and from the electronic resistances to and from the cell or stack components. Ohmic overpotential, as its name suggests, follows Ohm's law ( $\eta_o = iR$ , where  $i$  is the applied current). This relation indicates that the ohmic drop varies linearly with the applied current [21][22].

### 3.2. Activation Overpotential

The activation overpotential is the difference above the equilibrium potential required to overcome the activation energy of the cell reaction to produce a specified current. This overpotential is related to the electron transfer that occurs at the electrode interface. One of the main causes is the accumulation of charge at the electrode surface, producing an energy barrier for the incoming electrons [21][23].

In the absence of mass transfer limitations and at high activation overpotentials, the relationship between the rate of reaction, i.e., the current density,  $j$ , and the activation overpotential is given by the Tafel equation, Equation (11),

$$|\eta| = a + b \log |j| \quad (11)$$

being  $a$  the intercept, Equation (12), and  $b$  the so-called Tafel slope, Equation (13),

$$a = -b \log j_0 \quad (12)$$

$$b = -\frac{2.3RT}{\alpha F} \quad (13)$$

where  $\alpha$  is the anodic or cathodic transfer coefficient that represents the fraction of overpotential that lowers the kinetic barrier for the reaction at the electrode/electrolyte interface and  $j_0$  is the exchange current density, which is defined as the rate at which the reactants are transformed into products at equilibrium and the products are regenerated as reactants, free of any limitation due to mass transfer [8].

### 3.3. Concentration Overpotential

Concentration overpotential is caused by the concentration gradient of the reactants or the products in the electrolyte on the electrode surface, due to mass transport limitations as the reactions proceed. It occurs when mass transport cannot accompany the rate of the cell reaction. When the mass transport is relatively low, the reactant molecules cannot reach the reaction sites and/or the product molecules cannot drift from the reaction sites, resulting in a reduction of the reactants or accumulation of the products at the electrode surface. The mass transfer step can follow three different mechanisms: diffusion (movement of species conducted by a concentration gradient, from high to low concentration), migration (movement of charged species imposed by an electric field), and convection (movement of species driven by an unstable behavior of forces upon the electrolyte) [21][23].

---

## References

1. Veziroğlu, T.N. Century's Energy: Hydrogen Energy System. In Proceedings of the 13th International Conference on Emerging Nuclear Energy Systems, Istanbul, Turkey, 3–8 June 2007; pp. 1–16. Available online: (accessed on 2 May 2020).
2. BP. BP Statistical Review of World Energy June 2016. Available online: (accessed on 10 June 2020).
3. David, M.; Ocampo-Martínez, C.; Sánchez-Peña, R. Advances in alkaline water electrolyzers: A review. *J. Energy Storage* 2019, 23, 392–403.
4. Abe, J.O.; Popoola, A.P.I.; Ajenifuja, E.; Popoola, O.M. Hydrogen energy, economy and storage: Review and recommendation. *Int. J. Hydrogen Energy* 2019, 44, 15072–15086.
5. Baykara, S.Z. Hydrogen: A brief overview on its sources, production and environmental impact. *Int. J. Hydrogen Energy* 2018, 43, 10605–10614.
6. IRENA. Hydrogen from Renewable Power: Technology Outlook for the Energy Transition; International Renewable Energy Agency: Abu Dhabi, United Arab Emirates, 2018; Available online: (accessed on 10 June 2020).
7. Santos, D.M.F.; Sequeira, C.A.C.; Figueiredo, J.L. Hydrogen Production by Alkaline Water Electrolysis. *Quim. Nova* 2013, 36, 1176–1193.
8. Zeng, K.; Zhang, D. Recent progress in alkaline water electrolysis for hydrogen production and applications. *Prog. Energy Combust. Sci.* 2010, 36, 307–326.
9. Schmidt, O.; Gambhir, A.; Staffell, I.; Hawkes, A.; Nelson, J.; Few, S. Future cost and performance of water electrolysis: An expert elicitation study. *Int. J. Hydrogen Energy* 2017, 42, 30470–30492.
10. Rashid, M.M.; Al Mesfer, M.K.; Naseem, H.; Danish, M. Hydrogen Production by Water Electrolysis: A Review of Alkaline Water Electrolysis, PEM Water Electrolysis and High Temperature Water Electrolysis. *Int. J. Eng. Adv. Technol.* 2015, 4, 2249–8958. Available online: (accessed on 2 May 2020).
11. Barbir, F. PEM electrolysis for production of hydrogen from renewable energy sources. *Sol. Energy* 2005, 78, 661–669.
12. Li, D.; Motz, A.R.; Bae, C.; Fujimoto, C.; Yang, G.; Zhang, F.; Ayers, K.E.; Kim, Y.S. Durability of anion exchange membrane water electrolyzers. *Energy Environ. Sci.* 2021.
13. Laguna-Bercero, M.A. Recent advances in high temperature electrolysis using solid oxide fuel cells: A review. *J. Power Sources* 2012, 203, 4–16.

14. U.S. Bureau of Labor Statistics. Producer Price Indexes. Available online: <https://www.bls.gov/ppi/#data> (accessed on 5 November 2020).
15. Kjartansdóttir, C.K.; Moller, P. Development of Hydrogen Electrodes for Alkaline Water Electrolysis. Doctoral Thesis, Technical University of Denmark, Lyngby, Denmark, 2014.
16. Feng, Q.; Yuan, X.Z.; Liu, G.; Wei, B.; Zhang, Z.; Li, H.; Wang, H. A review of proton exchange membrane water electrolysis on degradation mechanisms and mitigation strategies. *J. Power Sources* 2017, 366, 33–55.
17. Schalenbach, M.; Tjarks, G.; Carmo, M.; Lueke, W.; Mueller, M.; Stolten, D. Acidic or Alkaline? Towards a New Perspective on the Efficiency of Water Electrolysis. *J. Electrochem. Soc.* 2016, 163, 3197–3208.
18. Felgenhauer, M.; Hamacher, T. State-of-the-art of commercial electrolyzers and on-site hydrogen generation for logistic vehicles in South Carolina. *Int. J. Hydrogen Energy* 2015, 40, 2084–2090.
19. Pletcher, D.; Li, X. Prospects for alkaline zero gap water electrolyzers for hydrogen production. *Int. J. Hydrogen Energy* 2011, 36, 15089–15104.
20. Flowers, P.; Theopold, K.; Langley, R. Chemistry—LibreTexts, 16.7 Electrolysis. Available online: (accessed on 30 May 2020).
21. Wang, W.; Wei, X.; Choi, D.; Lu, X.; Yang, G.; Sun, C. Chapter 1—Electrochemical cells for medium-and large-scale energy storage: Fundamentals. In *Advances in Batteries for Medium and Large-Scale Energy Storage*, 1st ed.; Menictas, C., Skyllas-Kazacos, M., Lim, T.M., Eds.; Woodhead Publishing Series in Energy: Cambridge, UK, 2014; pp. 3–28.
22. Zouhri, K.; Lee, S.Y. Evaluation and optimization of the alkaline water electrolysis ohmic polarization: Exergy study. *Int. J. Hydrogen Energy* 2016, 41, 7253–7263.
23. Carmo, M.; Stolten, D. Energy storage using hydrogen produced from excess renewable electricity: Power to hydrogen. In *Science and Engineering of Hydrogen-Based Energy Technologies. Hydrogen Production and Practical Applications in Energy Generation*, 1st ed.; Miranda, P.E., Ed.; Academic Press: Cambridge, MA, USA, 2018; pp. 165–199.
24. U.S. Bureau of Labor Statistics. Producer Price Indexes. Available online: <https://www.bls.gov/ppi/#data> (accessed on 5 November 2020).

---

Retrieved from <https://encyclopedia.pub/entry/history/show/33526>