

Forward Osmosis in Wastewater Treatment

Subjects: [Nanoscience & Nanotechnology](#) | [Water Resources](#)

Contributor: Zongli Xie

Forward osmosis (FO), driven by the osmotic pressure difference between solutions divided by a semi-permeable membrane, has been recognised as a potential energy-efficient filtration process with a low tendency for fouling and a strong ability to filtrate highly polluted wastewater.

forward osmosis

wastewater treatment

sewage concentration

1. Introduction

Freshwater is one of the scarcest resources in the world, and water shortage has become a serious problem with the growth of population and urbanisation [\[1\]\[2\]](#). In order to mitigate the negative impact of water shortage, water mining from wastewater was proposed by Lutchmiah et al. [\[3\]](#). In this concept, wastewater is a resource for water, nutrients, and energy [\[3\]\[4\]](#). Various technologies such as advanced oxidation, activated carbon adsorption [\[5\]](#), anaerobic digestion (AD), and coagulation/flocculation (CF) have been applied to recover freshwater and nutrients from different types of wastewater, including sewage, landfill leachate, and textile wastewater [\[6\]](#). However, one of the major challenges of nutrients and energy recovery from wastewater is the low-strength nature of wastewater, which not only impacts the recovery efficiency but also increases the construction cost for building reactors with large volumes [\[4\]](#). Therefore, it is critical to find an effective approach to increase the concentration of matters such as chemical oxygen demand (COD) and nutrients (nitrogen and phosphorus) [\[4\]\[7\]](#). Membrane-based technology including microfiltration (MF), ultrafiltration (UF), nanofiltration (NF), and reverse osmosis (RO) have been studied and applied for various sources of wastewater treatment, including landfilling leachate [\[8\]\[9\]](#) and textile wastewater [\[10\]\[11\]](#). However, the UF membrane has a low rejection toward small-size particles [\[12\]](#). NF and RO processes still face challenges, such as high energy requirements, low water recovery rates, and serious membrane fouling [\[13\]\[14\]](#). For example, a study reported an average energy requirement of 1.2–1.5 kW/m³ to treat the pre-treated wastewater by a RO system [\[15\]](#).

Recently, forward osmosis (FO) membrane-based technology has shown a growing interest in desalination [\[16\]\[17\]](#), power generation [\[18\]](#), food concertation [\[19\]](#), wastewater treatment, and resource recovery [\[20\]\[21\]](#). During the FO process, water molecules spontaneously transfer through a semipermeable membrane driven by an osmotic pressure gradient between feed solution and draw solution ([Figure 1a](#)). Due to no requirements of hydraulic pressure, the FO process shows advantages such as low energy cost (0.02 kWh/m³ under certain operational conditions) [\[7\]](#), low fouling tendency, loose fouling layer, and reduced cleaning frequency [\[22\]](#). Moreover, a FO membrane has a similar pore size to a RO membrane and good rejection of salts, heavy metals [\[23\]](#), and dyes [\[24\]](#).

Therefore, the FO process can be directly used to treat raw wastewater without complex pre-treatment processes [25][26].

So far, many cases about the application of the FO process as a single treatment process and hybrid systems integrating FO and other technologies have been investigated for treating various types of wastewater, such as sewage, landfilling leachate, and radioactive wastewater (Figure 1b). Besides the conventional inorganic draw solutes such as NaCl and MgCl₂, several new types of draw solutions such as liquid fertilisers [27] [28] and wastewater from absorption column [29] have been reported. However, challenges including membrane fouling, internal/external concentration polarisation, salt accumulation in the feed solution, and system operational condition optimisation still exist in FO technology.

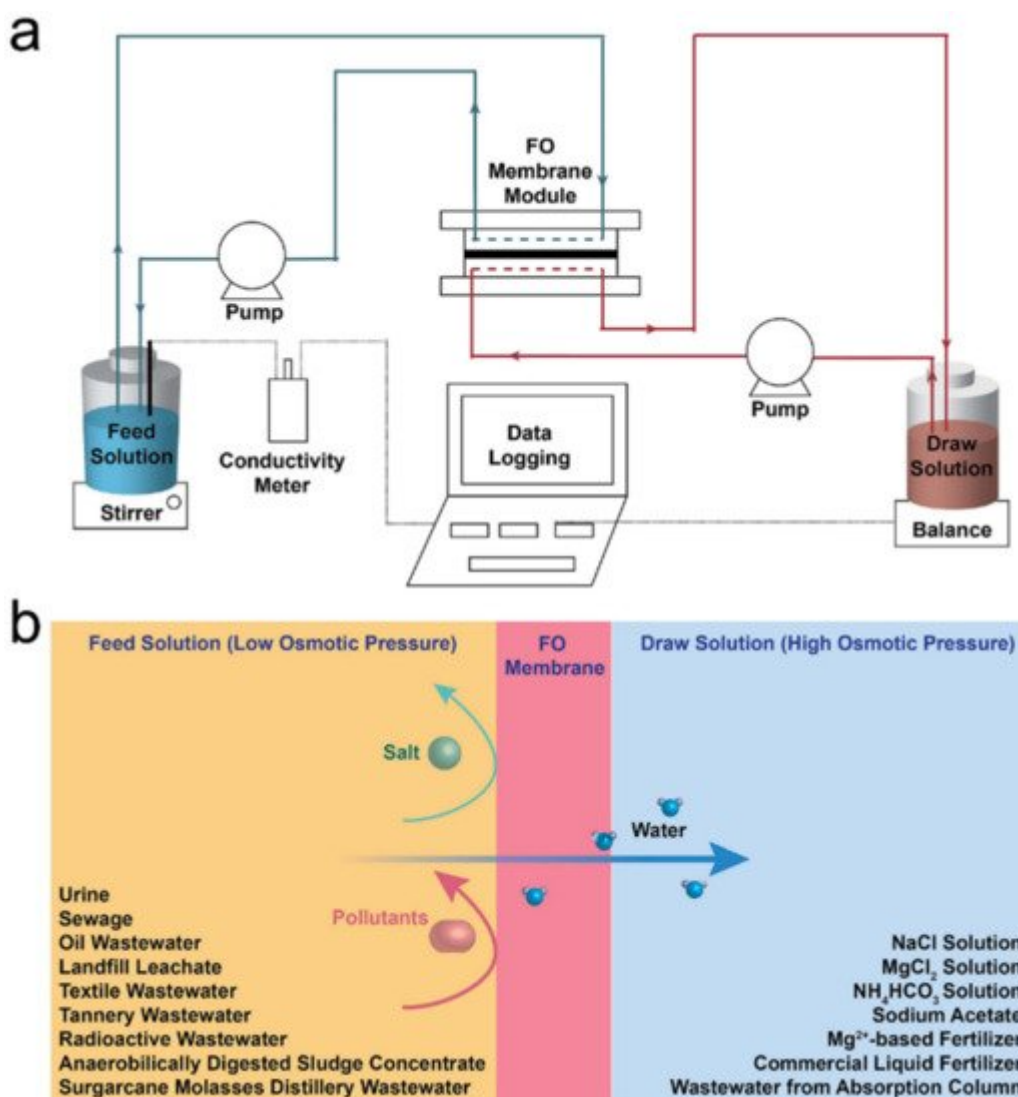


Figure 1. (a) Schematic of FO performance evaluation rig set-up, adapted from [30], and (b) major wastewater sources and draw solutions reported in FO-based wastewater treatment.

2. Integration of FO with Other Membrane Technologies

Current studies have revealed the feasibility of the FO filtration process in wastewater treatment. However, drawbacks such as the salt accumulation, requirement of draw solution recovery process, and further water mining from draw solution are still challenges that limit the wide application of stand-alone FO processes^[31]. As a result, integrating the FO process with other membrane filtration processes such as ultrafiltration (UF), nanofiltration (NF), reverse osmosis (RO) and membrane distillation (MD) is proposed (Figure 2a). Some of the combinations are win-win strategies to apply the advantages of varied technologies and avoid their shortcomings.

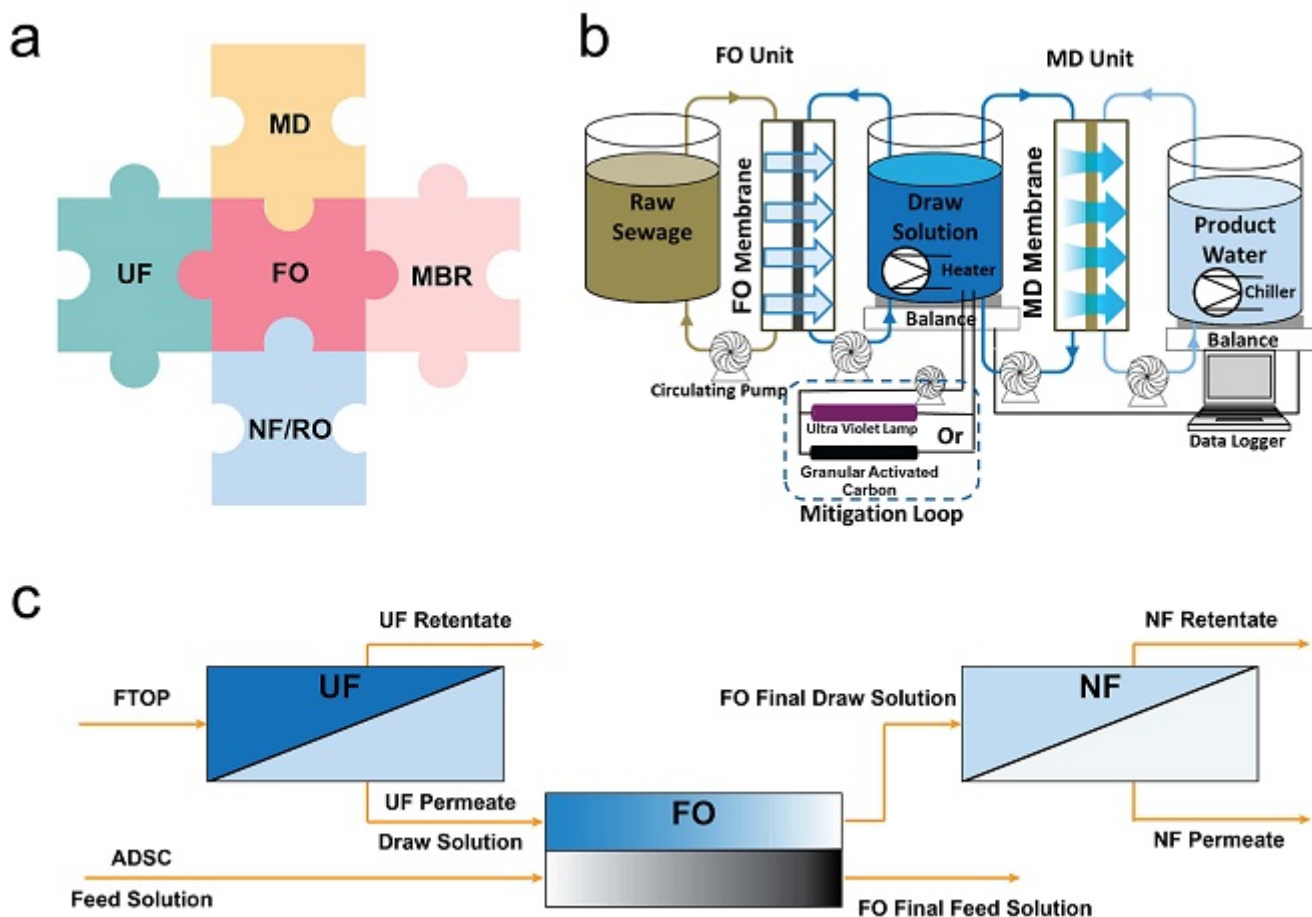


Figure 2. (a) Illustration of the integration of FO with other membrane-based technologies, (b) schematic diagram of the FO-MD hybrid system with the mitigation loop for the reduction of the concentration of feed contaminants in the draw solution, reprinted with permission from^[32], and (c) schematic diagram of the UF-FO-NF integrated system, adapted from^[33].

Zhang et al.^[34] reported a study about the application of a forward osmosis membrane distillation (FO-MD) system for sustainable water recovery and acetic acid reuse from oily wastewater. Results indicated that the FO process showed a large water flux, a high oil removal ratio, and a moderate acetic acid permeation rate. After that, the MD process further rejected the NaCl and oil in diluted draw solution, while completed the regeneration of draw solution. The FO-MD system is also studied for treating wastewater from other sources. Industrial wastewater contains highly toxic heavy metals such as Hg, Cd, and Pb, and its discharge is strictly regulated^[35]. Wu et al.^[31] investigated the FO-MD system for the treatment of wastewater containing heavy metals. The result indicated that the FO system could effectively reject more than 97% of Hg, Cd, and Pb, and the MD system achieved around a

100% rejection rate of these heavy metals. Human urine consists of 95% water, 3.5% organics, and 1.5% inorganic salt^[36], and is a potential water and nutrients source. Therefore, various technologies have been applied in water and nutrient recovery from urine, including electrodialysis, reverse osmosis, freeze/thaw concentration^[37], microbial fuel cell, and ion exchange membrane^{[38][39][40]}. Recently, Liu et al.^[38] investigated the feasibility of a FO-MD hybrid system for treating urine. The FO membrane rejected most of the TOC, TN, and NH₄⁺-N, but there were still some contaminants accumulated in the draw solution. Then, the MD process further rejected these contaminants, and the hybrid FO-MD system revealed nearly 100% rejection of TOC, TN, and NH₄⁺-N.

3. Integration of FO with Other Wastewater Treatment Technologies

Besides integrating with other membrane-based technologies, the FO process can also be applied as pre-treatment or post-treatment for other wastewater treatment processes. In this section, the integration of the FO process with activated sludge (Figure 3a), AD, CF, Fenton's oxidation, and ultrasonication (Figure 4a) will be discussed. Moreover, an advanced perspective about reverse salt flux is involved.

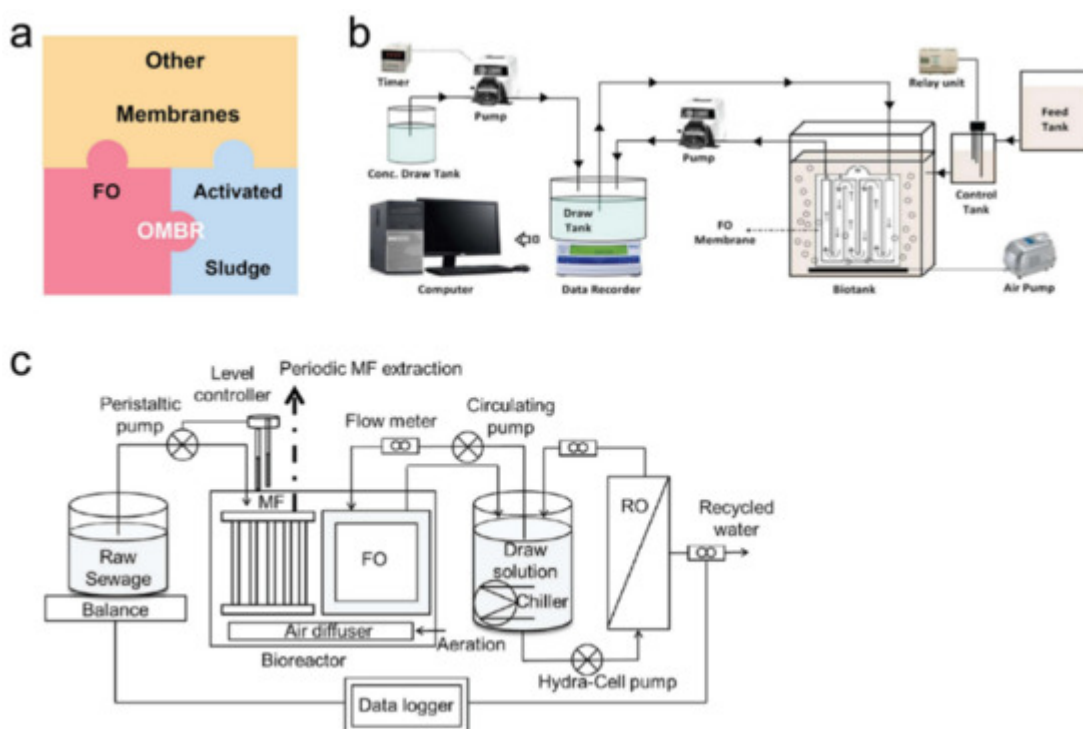


Figure 3. (a) Illustration of the integration of OMBR with other membrane technologies, (b) the submerged OMBR system, reprinted with permission from ^[41], and (c) the MF-OMBR–RO hybrid system, reprinted with permission from ^[42].

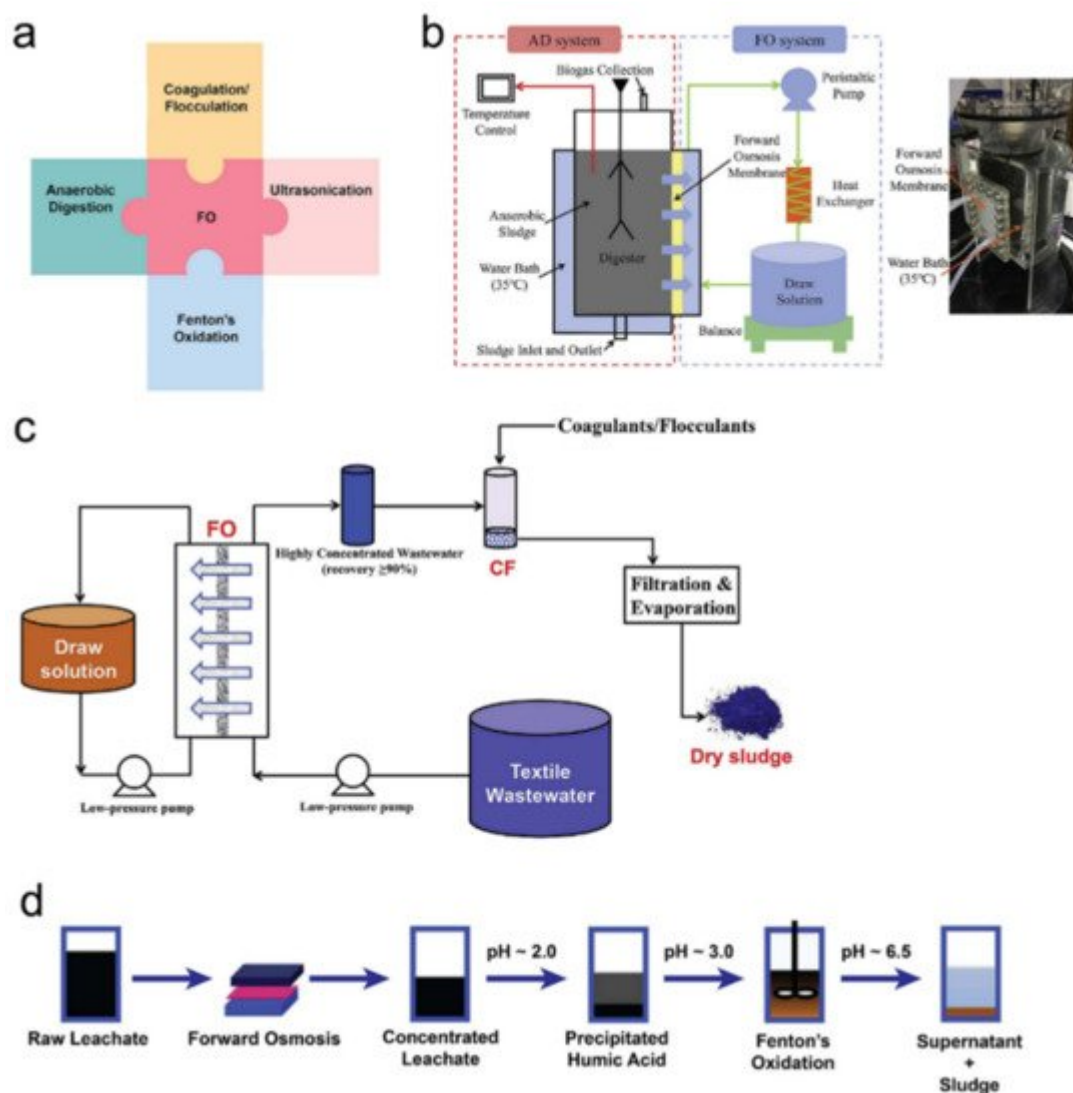


Figure 4. (a) Illustration of the integration of FO with other water treatment technologies, (b) the hybrid FO-AD system, reprinted with permission from [43], (c) the hybrid FO-CF system, reprinted with permission from [44], and (d) the integration of FO with Fenton's oxidation, adapted from [45].

3.1. Integration of FO with Biological Process

Apart from using FO as the pre-treatment process for MBR, another integration form between the FO and the biological process (i.e., activated sludge) is the osmotic membrane bioreactor (OMBR) (Figure 3a). In an OMBR system, the FO membrane is submerged inside the MBR and replaces conventional MF and UF membranes, as shown in Figure 6b [46][41]. The driving force in OMBR is osmotic pressure rather than external pressure or suction in MBR. Due to the application of the FO membrane, the OMBR system shows advantages including low fouling tendency and high-quality product water [47][48]. Moreover, the high selectivity property of the FO membrane can effectively concentrate salts, nutrients, and organic matter in the bioreactor, which can improve the efficiency of aerobic or anaerobic treatments [49][50][51][52][53]. Several studies have revealed the feasibility of OMBR systems for treating different wastewater. Qiu et al. [49] reported a study focusing on phosphorus recovery from municipal wastewater by the OMBR system. During the operation, the FO membrane effectively increased the concentrations

of PO_4^{3-} , Ca^{2+} , and Mg^{2+} , while the organic matter and NH_4^+ were removed through the biological activities in the bioreactor. By controlling the pH at 9.0, the system recovered 95% of PO_4^{3-} through the precipitation between PO_4^{3-} and Ca^{2+} , Mg^{2+} , as well as NH_4^+ . Additionally, during the 84-day continuing operation, the phosphorus recovery efficiency was around 50%. In another study, Yao et al. [46] investigated the removal and degradation mechanism of carbamazepine (CBZ) from wastewater through the application of OMBR. The result indicated that the OMBR system showed a high removal efficiency of COD (94.8%), NH_4^+ -N (93.6%), and CBZ (88.2%). Chen et al. [54] reported that the AnOMBR process was more effective than the traditional AnMBR process and demonstrated good removal efficiency of organic carbon (96%) and TP (~100%). Gao et al. [55] also reported a study about the application of AnOMBR for water recovery from real municipal sewage, and results indicated that the AnOMBR system had great removal efficiency of COD (96%), NH_4^+ -N (88%), TN (89%), and TP (~100%).

There are still several shortcomings of OMBR systems. Firstly, due to the reverse salt flux from NaCl draw solution and the concentration effect of wastewater by the FO process, salt is accumulated in the reactor [50][51][56]. The accumulated salt can reduce the osmotic pressure differences across the membrane as well as increase the density and viscosity of wastewater, consequently resulting in lower water flux of the FO process [57][58]. It also aggravates membrane fouling and damages the condition of activated sludge for microorganisms [59][55][58]. In order to mitigate the salt accumulation in OMBR systems, several strategies were proposed in current studies, including the selection of suitable draw solution with lower reverse salt flux [60], the fabrication of high-performance FO membranes [61], and the combination of MF/UF technologies with OMBR [62].

Luján-Facundo et al. [60] investigated the feasibility of the application of real wastewater solution from an absorption column consisting mainly of SO_4^{2-} and NH_4^+ -N as the draw solution for the OMBR system. Before application, the draw solution was adjusted at 4.0 pH to avoid the chemical damage of FO membranes. Their result indicated that the OMBR system showed low membrane fouling tendency and high water flux with this draw solution. In another study by Luján-Facundo et al. [63], they used the same wastewater as the draw solution to treat tannery wastewater which contained high salinity and organic matter concentration in an OMBR system. Although the reverse salt flux was mitigated by using this new draw solution, the salt accumulation was also observed due to the dewatering process of the naturally high-salinity wastewater. As a result, the efficiency of OMBR and bacterial activity was still significantly affected.

Another effective strategy proposed to mitigate the salt accumulation in the OMBR process is the integration of OMBR with other membrane filtration technology, such as MF, UF, and RO processes. By submerging MF or UF membranes into the bioreactor of the OMBR system, the salt in the bioreactor can be removed by transferring through the MF and UF membranes. As a result, the salinity accumulation was mitigated [64]. Qiu et al. [65] exhibited the application of a MF/OMBR system in their study about phosphorus recovery from municipal wastewater. After the dewatering by the FO process, the wastewater was enriched in the bioreactor. Using the MF membrane, the phosphorus was recovered by extracting the supernatant in the bioreactor. Their results indicated that the hybrid system demonstrated high removal efficiency of TOC (90%) and NH_4^+ -N (99%), as well as high phosphorus recovery (>90%). The long-term stability of the MF-OMBR system was evaluated by Luo et al. [66] in a 60-day

continuing study, which further indicated that the MF membrane can remove the salts from the bioreactor of the OMBR system and prevent salinity accumulation.

Despite the advantages of the MF/UF-OMBR system, there are some challenges. For example, in a study about TOC and $\text{NH}_4^+\text{-N}$ removals by a MF-OMBR system, Wang et al. [67] observed the membrane fouling, especially, the reversible fouling in the MF-OMBR was more serious than that in the OMBR system, which led to increased filtration resistance, aggravated ECP, and declined water flux. In addition, the fouling mitigation for the MF/UF-OMBR system may be complex due to the different fouling cleaning strategies between MF/UF (hydraulic backflushing) and FO membranes (osmotic backflushing) [64]. Another drawback of the MF/UF-OMBR system is a lack of technology to regenerate draw solutions. Therefore, Luo et al. [42] investigated a hybrid system integrating MF-OMBR and RO processes (Figure 6c). In this hybrid system, the MF membrane was applied to remove phosphorus from the enriched wastewater and to mitigate the salinity build-up in the bioreactor, while the RO process was for draw solute recovery and clean water production. The result indicated that the hybrid system can produce high-quality water. However, the accumulated organic matter and ammonia in the FO draw solution is a challenge requiring further investigation.

Similar to the stand-alone FO process, the efficiency of FO-integrated systems is impacted by factors such as the draw solution type, draw solution concentration, and cross-flow velocity. However, it is more complex when considering the optimal operating condition for FO-integrated systems since more factors in different treatment processes should be considered. Two of the major energy consumers of the FO process are draw solution reconcentration and recirculation pumps [68]. Cath et al. [69] estimated the specific energy consumption (SEC) of a FO-RO system. Their result indicated that 19 kWh/m^3 was required for solute reconcentration by the RO system, which accounted for 76% of the total SEC of the FO-RO system. Therefore, improving the solute reconcentration efficiency is critical to reduce energy consumption. McGinnis et al. [70] reported a study by using $\text{NH}_3\text{-CO}_2$ solution as the draw solution for the FO process. The diluted $\text{NH}_3\text{-CO}_2$ solution can be reconcentrated by waste heat, which reduced the energy consumption of the system to 0.84 kWh/m^3 . Recirculation pumps also consumed a large proportion of the SEC, which was estimated at 25–30% [68]. He et al. [71] found that the energy consumption for recirculation pumps could be reduced by decreasing the recirculation flow rate. However, the reduced water flux of the FO membrane and increased fouling caused by a lower recirculation flow rate should be considered when determining an optimal recirculation flow rate. Park et al. [64] reported a model to find optimal design parameters for the OMBR-RO system. The result indicated that increasing flow rates and concentrations of draw solution could improve the water flux of FO membranes, and could consequently reduce the cost of purchasing FO membrane, but it would also increase energy consumption of the FO system. Vinardell et al. [72] evaluated the feasibility of retrofitting the RO plant (final water production of $45,000 \text{ m}^3/\text{day}$) to a FO-RO-MBR plant. The result indicated that the FO-RO-MBR system was economically competitive if the recovery rate of the FO system was maintained at 50%. When the recovery rate increased to 80% or higher, the cost of the hybrid system was larger than that of the standalone RO plant. Therefore, taking into account the factors of both FO membranes and FO systems is critical for a highly efficient FO process.

3.2. Integrations of FO with Other Water Treatment Processes

Anaerobic digestion (AD) is an effective method to treat the waste sludge from wastewater treatment plants. However, due to the long retention time and low-solid concentration in the reactor, AD has a relatively high construction cost for building a large reactor [43]. It has been revealed that using concentrated sludge as the feeding substrate and applying high-solid AD can improve the efficiency and reduce the cost [54][73][74]. Gao et al. [75] reported a system integrating FO with AD processes. Results indicated that the FO process can be an effective pre-treatment process to concentrate sewage which can then be used as the influent for the AD process. Zhao et al. [43] reported a study about integrating OMBR and AD processes. Distinguished from the research by Gao et al. [75], the feed solution dewatering happened at the same time as the AD process in Zhao's system (Figure 7b). The hybrid AD-OMBR system showed better performance than the conventional AD system, with high solid content, organic degradation, and methane content in biogas. Textile wastewater is one of the most polluting wastewaters [76]. The CF process is an effective approach for textile wastewater decolourisation [77][78]. Similar to the AD process, the efficiency of the CF process can be improved by using concentrated dye wastewater [79]. Han et al. [44] reported a FO-CF hybrid system to treat textile wastewater (Figure 7c). In this system, the FO membrane showed a 99.9% rejection rate of dye, and effectively reduced the volume of wastewater. Due to the successful enrichment of textile, the further CF process exhibited a high dye removal rate (>95%) by using 500–1000 ppm of coagulants and flocculants.

Fenton's oxidation is a process that can be used to remove COD and TOC from landfill leachate [80][81]. However, Fenton's oxidation process requires a strict pH condition between 2 and 4 [80][82], resulting in a large amount of reagent dosage such as H₂SO₄. In order to reduce the reagent dosage and enhance the efficiency of Fenton's oxidation, Iskander et al. [45] designed a system integrating FO with humic acid (HA) recovery and Fenton's oxidation technologies. In this integrated system (Figure 4d), the FO process was applied to reduce the volume and alkalinity of leachate by dewatering and the concentration gradient-driven movement of the alkalinity-causing species, respectively. As a result, the required amount of H₂SO₄ for maintaining pH was reduced. After the FO process, the HA recovery process was applied to remove the humid substances from the wastewater, which provided positive effects to reduce the reagent (Fe (II) and H₂O₂) for further Fenton's oxidation. Moreover, the recovered HA can be used to remove aqueous phosphorus, nitrogen, heavy materials by precipitation, and can be a type of fertiliser [45][83][84]. Compared to the single Fenton's oxidation process, the integrated system reduced the required amount of H₂SO₄ by 25.2%, NaOH by 34.6%, and H₂O₂ by 35%.

In another study, Nguyen et al. [85] proposed a hybrid system that integrated ultrasonication and OMBR technologies to further improve the efficiency for sludge disintegration and dewater of OMBR systems. The result showed that the application of ultrasonication could improve the sludge concentration performance of OMBR. Specifically, to increase the sludge concentration from 3000 to 20,400 mg/L, the conventional OMBR needed 26 h, while the ultrasonication OMBR system only required 22 h. Furthermore, the ultrasonication OMBR system could achieve NH₄⁺-N removal efficiency of 96%, PO₄⁻³ of 98%, and dissolved organic carbon (DOC) of 99%. The major reason for this improvement was due to that the ultrasonic process affected the sludge solubilisation and reduced floc size, which facilitated the release of organic substances and bounded water into the liquid phase. Moreover, the application of ultrasound mitigated the membrane fouling by hindering the adhesion of foulants on the membrane surface.

References

1. Klaysom, C.; Cath, T.Y.; Depuydt, T.; Vankelecom, I.F. Forward and pressure retarded osmosis: Potential solutions for global challenges in energy and water supply. *Chem. Soc. Rev.* 2013, 42, 6959–6989.
2. Yasukawa, M.; Mishima, S.; Tanaka, Y.; Takahashi, T.; Matsuyama, H. Thin-film composite forward osmosis membrane with high water flux and high pressure resistance using a thicker void-free polyketone porous support. *Desalination* 2017, 402, 1–9.
3. Lutchmiah, K.; Cornelissen, E.R.; Harmsen, D.J.; Post, J.W.; Lampi, K.; Ramaekers, H.; Rietveld, L.C.; Roest, K. Water recovery from sewage using forward osmosis. *Water Sci. Technol.* 2011, 64, 1443–1449.
4. Wang, Z.; Zheng, J.; Tang, J.; Wang, X.; Wu, Z. A pilot-scale forward osmosis membrane system for concentrating low-strength municipal wastewater: Performance and implications. *Sci. Rep.* 2016, 6, 1–11.
5. Wong, S.; Ngadi, N.; Inuwa, I.M.; Hassan, O. Recent advances in applications of activated carbon from biowaste for wastewater treatment: A short review. *J. Clean. Prod.* 2018, 175, 361–375.
6. Paul, R.; Kenway, S.; Mukheibir, P. How scale and technology influence the energy intensity of water recycling systems-an analytical review. *J. Clean. Prod.* 2019, 215, 1457–1480.
7. Iskander, S.M.; Zou, S.; Brazil, B.; Novak, J.T.; He, Z. Energy consumption by forward osmosis treatment of landfill leachate for water recovery. *Waste Manag.* 2017, 63, 284–291.
8. Di Palma, L.; Ferrantelli, P.; Merli, C.; Petrucci, E. Treatment of industrial landfill leachate by means of evaporation and reverse osmosis. *Waste Manage.* 2002, 22, 951–955.
9. Renou, S.; Givaudan, J.; Poulain, S.; Dirassouyan, F.; Moulin, P. Landfill leachate treatment: Review and opportunity. *J. Hazard. Mater.* 2008, 150, 468–493.
10. Lin, J.; Ye, W.; Zeng, H.; Yang, H.; Shen, J.; Darvishmanesh, S.; Luis, P.; Sotto, A.; Van der Bruggen, B. Fractionation of direct dyes and salts in aqueous solution using loose nanofiltration membranes. *J. Membr. Sci.* 2015, 477, 183–193.
11. Lin, J.; Tang, C.Y.; Ye, W.; Sun, S.-P.; Hamdan, S.H.; Volodin, A.; Van Haesendonck, C.; Sotto, A.; Luis, P.; Van der Bruggen, B. Unraveling flux behavior of superhydrophilic loose nanofiltration membranes during textile wastewater treatment. *J. Membr. Sci.* 2015, 493, 690–702.
12. Marcucci, M.; Ciardelli, G.; Matteucci, A.; Ranieri, L.; Russo, M. Experimental campaigns on textile wastewater for reuse by means of different membrane processes. *Desalination* 2002, 149, 137–143.

13. Verliefde, A.R.; Cornelissen, E.; Heijman, S.; Verberk, J.; Amy, G.; Van der Bruggen, B.; Van Dijk, J. The role of electrostatic interactions on the rejection of organic solutes in aqueous solutions with nanofiltration. *J. Membr. Sci.* 2008, 322, 52–66.
14. Van der Bruggen, B.; Cornelis, G.; Vandecasteele, C.; Devreese, I. Fouling of nanofiltration and ultrafiltration membranes applied for wastewater regeneration in the textile industry. *Desalination* 2005, 175, 111–119.
15. Pearce, G. Uf/mf pre-treatment to ro in seawater and wastewater reuse applications: A comparison of energy costs. *Desalination* 2008, 222, 66–73.
16. Wu, X.; Fang, F.; Zhang, K. Graphene oxide modified forward osmosis membranes with improved hydrophilicity and desalination performance. *Desalin. Water Treat.* 2017, 85, 73–83.
17. Wu, X.; Ding, M.; Xu, H.; Yang, W.; Zhang, K.; Tian, H.; Wang, H.; Xie, Z. Scalable $\text{Ti}_3\text{C}_2\text{T}_x$ MXene interlayered forward osmosis membranes for enhanced water purification and organic solvent recovery. *ACS Nano* 2020, 14, 9125–9135.
18. Loeb, S. Production of energy from concentrated brines by pressure-retarded osmosis: I. Preliminary technical and economic correlations. *J. Membr. Sci.* 1976, 1, 49–63.
19. Nayak, C.A.; Rastogi, N.K. Forward osmosis for the concentration of anthocyanin from *Garcinia indica* Choisy. *Sep. Purif. Technol.* 2010, 71, 144–151.
20. Chung, T.-S.; Li, X.; Ong, R.C.; Ge, Q.; Wang, H.; Han, G. Emerging forward osmosis (FO) technologies and challenges ahead for clean water and clean energy applications. *Curr. Opin. Chem. Eng.* 2012, 1, 246–257.
21. Han, G.; Zhao, B.; Fu, F.; Chung, T.-S.; Weber, M.; Staudt, C.; Maletzko, C. High performance thin-film composite membranes with mesh-reinforced hydrophilic sulfonated polyphenylenesulfone (SPSPU) substrates for osmotically driven processes. *J. Membr. Sci.* 2016, 502, 84–93.
22. Achilli, A.; Cath, T.Y.; Marchand, E.A.; Childress, A.E. The forward osmosis membrane bioreactor: A low fouling alternative to MBR processes. *Desalination* 2009, 239, 10–21.
23. Liu, X.; Wu, J.; Hou, L.-a.; Wang, J. Removal of Co, Sr and Cs ions from simulated radioactive wastewater by forward osmosis. *Chemosphere* 2019, 232, 87–95.
24. Korenak, J.; Hélix-Nielsen, C.; Bukšek, H.; Petrinić, I. Efficiency and economic feasibility of forward osmosis in textile wastewater treatment. *J. Clean. Prod.* 2019, 210, 1483–1495.
25. Gao, Y.; Fang, Z.; Liang, P.; Huang, X. Direct concentration of municipal sewage by forward osmosis and membrane fouling behavior. *Bioresour. Technol.* 2018, 247, 730–735.
26. Chekli, L.; Kim, Y.; Phuntsho, S.; Li, S.; Ghaffour, N.; Leiknes, T.; Shon, H.K. Evaluation of fertilizer-drawn forward osmosis for sustainable agriculture and water reuse in arid regions. *J.*

- Environ. Manag. 2017, 187, 137–145.
27. Ming Xie; Mingxin Zheng; Paul Cooper; William E. Price; Long D. Nghiem; Menachem Elimelech; Osmotic dilution for sustainable greenwall irrigation by liquid fertilizer: Performance and implications. *Journal of Membrane Science* **2015**, 494, 32-38, 10.1016/j.memsci.2015.07.026.
 28. Mona Gulied; Fares Al Momani; MajedA Khraisheh; Rahul Bhosale; Ahmed AlNouss; Influence of draw solution type and properties on the performance of forward osmosis process: Energy consumption and sustainable water reuse. *Chemosphere* **2019**, 233, 234-244, 10.1016/j.chemosphere.2019.05.241.
 29. M.J. Luján-Facundo; J.L. Soler-Cabezas; José-Antonio Mendoza-Roca; M.C. Vincent-Vela; A. Bes-Piá; S. Doñate-Hernández; A study of the osmotic membrane bioreactor process using a sodium chloride solution and an industrial effluent as draw solutions. *Chemical Engineering Journal* **2017**, 322, 603-610, 10.1016/j.cej.2017.04.062.
 30. Wu, X.; Tanner, J.; Ng, D.; Acharya, D.; Xie, Z. Sewage concentration via a graphene oxide modified thin-film nanocomposite forward osmosis membrane: Enhanced performance and mitigated fouling. *Chem. Eng. J.* 2020, 127718.
 31. Chia-Yu Wu; Shiao-Shing Chen; Dai-Zhou Zhang; Jun Kobayashi; Hg removal and the effects of coexisting metals in forward osmosis and membrane distillation. *Water Science and Technology* **2017**, 75, 2622-2630, 10.2166/wst.2017.143.
 32. Ming Xie; Long D. Nghiem; William E. Price; Menachem Elimelech; A Forward Osmosis–Membrane Distillation Hybrid Process for Direct Sewer Mining: System Performance and Limitations. *Environmental Science & Technology* **2013**, 47, 13486-13493, 10.1021/es404056e.
 33. Carlos Carbonell-Alcaina; Jose Luis Soler-Cabezas; Amparo Bes-Piá; María Cinta Vincent-Vela; Jose Antonio Mendoza-Roca; Laura Pastor-Alcañiz; Silvia Álvarez-Blanco; Integrated Membrane Process for the Treatment and Reuse of Residual Table Olive Fermentation Brine and Anaerobically Digested Sludge Centrate. *Membranes* **2020**, 10, 253, 10.3390/membranes10100253.
 34. Sui Zhang; Peng Wang; Xiuzhu Fu; Tai-Shung Chung; Sustainable water recovery from oily wastewater via forward osmosis-membrane distillation (FO-MD). *Water Research* **2014**, 52, 112-121, 10.1016/j.watres.2013.12.044.
 35. Meltem Urgun-Demirtas; Paul L. Benda; Patricia S. Gillenwater; M. Cristina Negri; Hui Xiong; Seth Snyder; Achieving very low mercury levels in refinery wastewater by membrane filtration. *Journal of Hazardous Materials* **2012**, 215-216, 98-107, 10.1016/j.jhazmat.2012.02.040.
 36. Bo-Bertil Lind; Zsófia Ban; Stefan Bydén; Volume reduction and concentration of nutrients in human urine. *Ecological Engineering* **2001**, 16, 561-566, 10.1016/s0925-8574(00)00107-5.

37. M. Maurer; W. Pronk; Tove A. Larsen; Treatment processes for source-separated urine. *Water Research* **2006**, *40*, 3151-3166, 10.1016/j.watres.2006.07.012.
38. Qianliang Liu; Caihong Liu; Lei Zhao; Weichao Ma; Huiling Liu; Jun Ma; Integrated forward osmosis-membrane distillation process for human urine treatment. *Water Research* **2016**, *91*, 45-54, 10.1016/j.watres.2015.12.045.
39. Ryan C. Tice; Younggy Kim; Energy efficient reconcentration of diluted human urine using ion exchange membranes in bioelectrochemical systems. *Water Research* **2014**, *64*, 61-72, 10.1016/j.watres.2014.06.037.
40. Jeremy A. O'Neal; Treavor H. Boyer; Phosphate recovery using hybrid anion exchange: Applications to source-separated urine and combined wastewater streams. *Water Research* **2013**, *47*, 5003-5017, 10.1016/j.watres.2013.05.037.
41. Aftab, B.; Khan, S.J.; Maqbool, T.; Hankins, N.P. Heavy metals removal by osmotic membrane bioreactor (ombr) and their effect on sludge properties. *Desalination* **2017**, *403*, 117–127.
42. Luo, W.; Hai, F.I.; Price, W.E.; Guo, W.; Ngo, H.H.; Yamamoto, K.; Nghiem, L.D. Phosphorus and water recovery by a novel osmotic membrane bioreactor–reverse osmosis system. *Bioresour. Technol.* **2016**, *200*, 297–304.
43. Zhao, J.; Li, Y.; Pan, S.; Tu, Q.; Zhu, H. Performance of a forward osmotic membrane bioreactor for anaerobic digestion of waste sludge with increasing solid concentration. *J. Environ. Manag.* **2019**, *246*, 239–246.
44. Han, G.; Liang, C.-Z.; Chung, T.-S.; Weber, M.; Staudt, C.; Maletzko, C. Combination of forward osmosis (fo) process with coagulation/flocculation (cf) for potential treatment of textile wastewater. *Water Res.* **2016**, *91*, 361–370.
45. Iskander, S.M.; Novak, J.T.; He, Z. Reduction of reagent requirements and sludge generation in fenton's oxidation of landfill leachate by synergistically incorporating forward osmosis and humic acid recovery. *Water Res.* **2019**, *151*, 310–317.
46. Yao, M.; Duan, L.; Wei, J.; Qian, F.; Hermanowicz, S.W. Carbamazepine removal from wastewater and the degradation mechanism in a submerged forward osmotic membrane bioreactor. *Bioresour. Technol.* **2020**, *314*, 123732.
47. Huang, L.; Lee, D.-J. Membrane bioreactor: A mini review on recent r&d works. *Bioresour. Technol.* **2015**, *194*, 383–388.
48. Praveen, P.; Loh, K.-C. Osmotic membrane bioreactor for phenol biodegradation under continuous operation. *J. Hazard. Mater.* **2016**, *305*, 115–122.
49. Qiu, G.; Ting, Y.-P. Direct phosphorus recovery from municipal wastewater via osmotic membrane bioreactor (ombr) for wastewater treatment. *Bioresour. Technol.* **2014**, *170*, 221–229.

50. Xiao, D.; Tang, C.Y.; Zhang, J.; Lay, W.C.; Wang, R.; Fane, A.G. Modeling salt accumulation in osmotic membrane bioreactors: Implications for fo membrane selection and system operation. *J. Membr. Sci.* 2011, 366, 314–324.
51. Qiu, G.; Ting, Y.-P. Osmotic membrane bioreactor for wastewater treatment and the effect of salt accumulation on system performance and microbial community dynamics. *Bioresour. Technol.* 2013, 150, 287–297.
52. Kim, S. Scale-up of osmotic membrane bioreactors by modeling salt accumulation and draw solution dilution using hollow-fiber membrane characteristics and operation conditions. *Bioresour. Technol.* 2014, 165, 88–95.
53. Ab Hamid, N.H.; Wang, D.K.; Smart, S.; Ye, L. Achieving stable operation and shortcut nitrogen removal in a long-term operated aerobic forward osmosis membrane bioreactor (fombr) for treating municipal wastewater. *Chemosphere* 2020, 260, 127581.
54. Chen, L.; Gu, Y.; Cao, C.; Zhang, J.; Ng, J.-W.; Tang, C. Performance of a submerged anaerobic membrane bioreactor with forward osmosis membrane for low-strength wastewater treatment. *Water Res.* 2014, 50, 114–123.
55. Gao, Y.; Fang, Z.; Chen, C.; Zhu, X.; Liang, P.; Qiu, Y.; Zhang, X.; Huang, X. Evaluating the performance of inorganic draw solution concentrations in an anaerobic forward osmosis membrane bioreactor for real municipal sewage treatment. *Bioresour. Technol.* 2020, 307, 123254.
56. Zhang, J.; Loong, W.L.C.; Chou, S.; Tang, C.; Wang, R.; Fane, A.G. Membrane biofouling and scaling in forward osmosis membrane bioreactor. *J. Membr. Sci.* 2012, 403, 8–14.
57. Gu, Y.; Chen, L.; Ng, J.-W.; Lee, C.; Chang, V.W.-C.; Tang, C.Y. Development of anaerobic osmotic membrane bioreactor for low-strength wastewater treatment at mesophilic condition. *J. Membr. Sci.* 2015, 490, 197–208.
58. Lay, W.C.; Liu, Y.; Fane, A.G. Impacts of salinity on the performance of high retention membrane bioreactors for water reclamation: A review. *Water Res.* 2010, 44, 21–40.
59. Ferrari, F.; Balcazar, J.L.; Rodriguez-Roda, I.; Pijuan, M. Anaerobic membrane bioreactor for biogas production from concentrated sewage produced during sewer mining. *Sci. Total Environ.* 2019, 670, 993–1000.
60. Luján-Facundo, M.J.; Soler-Cabezas, J.L.; Mendoza-Roca, J.A.; Vincent-Vela, M.C.; Bes-Piá, A.; Doñate-Hernández, S. A study of the osmotic membrane bioreactor process using a sodium chloride solution and an industrial effluent as draw solutions. *Chem. Eng. J.* 2017, 322, 603–610.
61. Wang, K.Y.; Ong, R.C.; Chung, T.-S. Double-skinned forward osmosis membranes for reducing internal concentration polarization within the porous sublayer. *Ind. Eng. Chem. Res.* 2010, 49, 4824–4831.

62. Holloway, R.W.; Regnery, J.; Nghiem, L.D.; Cath, T.Y. Removal of trace organic chemicals and performance of a novel hybrid ultrafiltration-osmotic membrane bioreactor. *Environ. Sci. Technol.* 2014, 48, 10859–10868.
63. Luján-Facundo, M.J.; Fernández-Navarro, J.; Alonso-Molina, J.L.; Amorós-Muñoz, I.; Moreno, Y.; Mendoza-Roca, J.A.; Pastor-Alcañiz, L. The role of salinity on the changes of the biomass characteristics and on the performance of an ombr treating tannery wastewater. *Water Res.* 2018, 142, 129–137.
64. Park, S.H.; Park, B.; Shon, H.K.; Kim, S. Modeling full-scale osmotic membrane bioreactor systems with high sludge retention and low salt concentration factor for wastewater reclamation. *Bioresour. Technol.* 2015, 190, 508–515.
65. Qiu, G.; Law, Y.-M.; Das, S.; Ting, Y.-P. Direct and complete phosphorus recovery from municipal wastewater using a hybrid microfiltration-forward osmosis membrane bioreactor process with seawater brine as draw solution. *Environ. Sci. Technol.* 2015, 49, 6156–6163.
66. Luo, W.; Hai, F.I.; Kang, J.; Price, W.E.; Nghiem, L.D.; Elimelech, M. The role of forward osmosis and microfiltration in an integrated osmotic-microfiltration membrane bioreactor system. *Chemosphere* 2015, 136, 125–132.
67. Wang, X.; Yuan, B.; Chen, Y.; Li, X.; Ren, Y. Integration of micro-filtration into osmotic membrane bioreactors to prevent salinity build-up. *Bioresour. Technol.* 2014, 167, 116–123.
68. Zou, S.; Yuan, H.; Childress, A.; He, Z. Energy Consumption by Recirculation: A Missing Parameter When Evaluating forward Osmosis. *Environ. Sci. Technol.* 2016, 50, 6827–6829.
69. Cath, T.Y.; Gormly, S.; Beaudry, E.G.; Flynn, M.T.; Adams, V.D.; Childress, A.E. Membrane contactor processes for wastewater reclamation in space: Part i. Direct osmotic concentration as pretreatment for reverse osmosis. *J. Membr. Sci.* 2005, 257, 85–98.
70. McGinnis, R.L.; Elimelech, M. Energy requirements of ammonia–carbon dioxide forward osmosis desalination. *Desalination* 2007, 207, 370–382.
71. Xiang, X.; Zou, S.; He, Z. Energy consumption of water recovery from wastewater in a submerged forward osmosis system using commercial liquid fertilizer as a draw solute. *Sep. Purif. Technol.* 2017, 174, 432–438.
72. Vinardell, S.; Astals, S.; Mata-Alvarez, J.; Dosta, J. Techno-economic analysis of combining forward osmosis-reverse osmosis and anaerobic membrane bioreactor technologies for municipal wastewater treatment and water production. *Bioresour. Technol.* 2020, 297, 122395.
73. Hu, Y.-y.; Wu, J.; Li, H.-z.; Poncin, S.; Wang, K.-j.; Zuo, J.-e. Novel insight into high solid anaerobic digestion of swine manure after thermal treatment: Kinetics and microbial community properties. *J. Environ. Manag.* 2019, 235, 169–177.

74. Castelló, E.; Braga, L.; Fuentes, L.; Etchebehere, C. Possible causes for the instability in the h₂ production from cheese whey in a cstr. *Int. J. Hydrog. Energy* 2018, 43, 2654–2665.
75. Gao, Y.; Fang, Z.; Liang, P.; Zhang, X.; Qiu, Y.; Kimura, K.; Huang, X. Anaerobic digestion performance of concentrated municipal sewage by forward osmosis membrane: Focus on the impact of salt and ammonia nitrogen. *Bioresour. Technol.* 2019, 276, 204–210.
76. Lau, W.-J.; Ismail, A. Polymeric nanofiltration membranes for textile dye wastewater treatment: Preparation, performance evaluation, transport modelling, and fouling control—A review. *Desalination* 2009, 245, 321–348.
77. Verma, A.K.; Dash, R.R.; Bhunia, P. A review on chemical coagulation/flocculation technologies for removal of colour from textile wastewaters. *J. Environ. Manag.* 2012, 93, 154–168.
78. Chen, T.; Gao, B.; Yue, Q. Effect of dosing method and ph on color removal performance and floc aggregation of polyferric chloride–polyamine dual-coagulant in synthetic dyeing wastewater treatment. *Colloids Surf. Physicochem. Eng. Aspects* 2010, 355, 121–129.
79. Liang, C.-Z.; Sun, S.-P.; Li, F.-Y.; Ong, Y.-K.; Chung, T.-S. Treatment of highly concentrated wastewater containing multiple synthetic dyes by a combined process of coagulation/flocculation and nanofiltration. *J. Membr. Sci.* 2014, 469, 306–315.
80. Deng, Y.; Englehardt, J.D. Treatment of landfill leachate by the fenton process. *Water Res.* 2006, 40, 3683–3694.
81. Zhao, X.; Wei, X.; Xia, P.; Liu, H.; Qu, J. Removal and transformation characterization of refractory components from biologically treated landfill leachate by fe²⁺/naclo and fenton oxidation. *Sep. Purif. Technol.* 2013, 116, 107–113.
82. Hermosilla, D.; Cortijo, M.; Huang, C.P. Optimizing the treatment of landfill leachate by conventional fenton and photo-fenton processes. *Sci. Total Environ.* 2009, 407, 3473–3481.
83. Li, H.; Jin, Y.; Nie, Y. Application of alkaline treatment for sludge decrement and humic acid recovery. *Bioresour. Technol.* 2009, 100, 6278–6283.
84. Morozesk, M.; Bonomo, M.M.; da Costa Souza, I.; Rocha, L.D.; Duarte, I.D.; Martins, I.O.; Dobbss, L.B.; Carneiro, M.T.W.D.; Fernandes, M.N.; Matsumoto, S.T. Effects of humic acids from landfill leachate on plants: An integrated approach using chemical, biochemical and cytogenetic analysis. *Chemosphere* 2017, 184, 309–317.
85. Nguyen, N.C.; Nguyen, H.T.; Chen, S.-S.; Nguyen, N.T.; Li, C.-W. Application of forward osmosis (fo) under ultrasonication on sludge thickening of waste activated sludge. *Water Sci. Technol.* 2015, 72, 1301–1307.
86. Jeremy A. O'Neal; Treavor H. Boyer; Phosphate recovery using hybrid anion exchange: Applications to source-separated urine and combined wastewater streams. *Water Research*

2013, 47, 5003-5017, 10.1016/j.watres.2013.05.037.

Retrieved from <https://encyclopedia.pub/entry/history/show/22937>