

# Development of Robotic Arm Harvesters

Subjects: **Agricultural Engineering**

Contributor: Abdul Kaleem , Saddam Hussain , Muhammad Aqib , Muhammad Jehanzeb Masud Cheema , Shoaib Rashid Saleem , Umar Farooq

Promotion of research and development in advanced technology must be implemented in agriculture to increase production in the current challenging environment where the demand for manual farming is decreasing due to the unavailability of skilled labor, high cost, and shortage of labor. The demand for fruit harvester technologies, i.e., mechanized harvesting, manned and unmanned aerial systems, and robotics, has increased. However, several industries are working on the development of industrial-scale production of advanced harvesting technologies at low cost, no commercial robotic arm has been developed for selective harvesting of valuable fruits and vegetables, especially within controlled strictures, i.e., greenhouse and hydroponic contexts.

digital agriculture

fruit harvester

object recognition

selective harvesting

development challenges

## 1. Introduction

Using robotics to accomplish work has become desirable over the last two decades in every field, i.e., industry <sup>[1]</sup>, medical <sup>[2]</sup>, agriculture <sup>[3]</sup>, and military <sup>[4]</sup>. Many researchers have discussed the development challenges that arise in the field of agriculture for fruit and vegetable harvesting and other field operations, i.e., sowing, weeding, and spraying vegetables <sup>[5][6][7]</sup>. However, with advancements in the Internet of Things (IoT), sensors, high-speed internet (4G/5G/6G), and robotic automation with required attachments, developments in agriculture are at their peak, and many operations, i.e., crop quality and quantity measurement, disease finding, the planting process, and harvesting are taken from types of machinery in developed countries <sup>[8][9][10][11]</sup>. The word automation here refers to the equipment and devices that work in place of manual procedures. Globally, the demand for agricultural products is increasing rapidly. It is expected that, in the next 30 years, agriculture production needs to be increased by about 50% to meet food demands globally <sup>[12][13]</sup>.

Many regions around the world are facing labor shortages in the agricultural sector <sup>[14]</sup>. Robotic arms can help address this issue by automating the harvesting process and reducing dependency on human labor, especially during peak harvesting seasons when the demand for workers is high. With the passage of time, the demand for manual farming is decreasing due to the unavailability of agricultural skilled labor and its shortage due to extreme weather conditions in the field <sup>[15]</sup>. Sometimes, the reason behind labor shortages occurs due to the pandemic situation and its effect on worldwide travel restrictions <sup>[16][17][18][19]</sup>. These acts may affect the availability of migrant laborers in addition to several other factors, such as people migrating from rural to urban life, lack of interest in

farming, and traditional old farmers. As a result, a lot of fruit products are spoiled in the field, where harvesting relies on seasonal field workers [20]. In some cases, manual harvesting affects farmers' health due to improper body posture, which can cause musculoskeletal disorders [21]. Farmers also highlight the problem of working in a harsh environment, which can cause several health issues. Moreover, another disadvantage of manual harvesting is the high labor cost and inefficient working. Surveys from multiple companies show about 35–40% of the yield of citrus is spent on manual harvesting [22]. Another study about cost calculation regarding the production of sweet cherries revealed that half of their production margin is utilized on their manual harvesting [23].


## **2. Robotic Arm Harvesters**

In the early stages of fruit-harvesting robotic arms, the designs were rudimentary, with basic grippers and single-axis movements characterizing their mechanical form [24][25][26]. These early arms lacked adaptability to different fruit shapes and sizes, leading to a quest for more sophisticated solutions [27]. As the years progressed, a breakthrough came with the introduction of multi-axis movement, granting these robotic arms greater flexibility and reach [28]. The incorporation of force sensors and vision systems marked another milestone, enabling the arms to delicately handle fruits and precisely locate them within their environment [29]. However, it was the 2010s that saw a true revolution in gripper design. Adaptive grippers emerged, their flexible fingers and suction cups adapting seamlessly to a variety of fruit shapes [30][31][32][33]. Soft grippers, employing compliant materials, further improved interactions, reducing the risk of damage. In the subsequent years, advanced materials and electromagnetic actuators transformed the landscape, making arms lightweight, energy-efficient, and precise. The hybrid gripper systems of the 2020s brought a new level of versatility, combining different gripping mechanisms for enhanced fruit handling. Simultaneously, artificial intelligence emerged as a key player, empowering these arms with real-time decision-making capabilities [34][35][36]. Through specialized attachments and end-effectors, from gentle suctions for delicate fruits to cutting tools for stalked ones, these robotic arms evolved into versatile, indispensable tools in fruit harvesting [37][38][39]. Ergonomics and safety considerations also received due attention, ensuring that these mechanical marvels not only excelled in function but also in user-friendly operation. The design of the fruit-harvesting robotic arm is one of continuous innovation, driven by a quest for precision, adaptability, and efficiency, ultimately reshaping the landscape of agricultural practices.

Researchers have made significant strides in addressing the challenge of localizing fruits in fruit-harvesting robotic arms since the last century [40]. Before the 2000s, research in the field of fruit-harvesting robotic arms faced significant challenges in localizing fruits due to the limited availability of advanced technology [41]. Their efforts primarily focused on rudimentary methods of fruit detection and localization. One of the earliest approaches involved basic computer vision techniques. Researchers developed algorithms to analyze 2D images of fruit-bearing trees [42][43][44]. These algorithms relied on color-based segmentation and shape recognition to identify potential fruit locations [45][46]. However, this method had limitations, especially in varying lighting conditions and with occluded or partially hidden fruits.

Another approach was the use of ultrasonic sensors [47][48]. These sensors emitted high-frequency sound waves and measured the time taken for the waves to bounce back after hitting an object. Although they were effective in

detecting obstacles, they were less precise in identifying individual fruits. Furthermore, some researchers explored the use of infrared sensors to detect temperature variations associated with ripe fruits [49]. This approach, however, had limited success, as factors like ambient temperature and humidity could affect the readings. Researchers also experimented with mechanical contact-based systems. These systems involved probes or robotic arms that physically touched fruits to assess their ripeness [50]. Although this approach could provide valuable information, it was not suitable for delicate fruits or those in high-density clusters. Initially, in the early 2000s, the focus was on basic computer vision techniques for fruit recognition. This involved developing algorithms to detect and identify fruits based on color, shape, and texture. As technology advanced, researchers began integrating more sophisticated sensing systems, such as multi-spectral imaging, which allowed for a more detailed analysis of fruit characteristics. This enabled the robots to distinguish between ripe and unripe fruits with higher accuracy. In the mid-2010s, the implementation of depth sensors marked a crucial advancement. These sensors provided precise information about the location of fruits in three-dimensional space, allowing for more accurate localization [51][52][53]. Additionally, force feedback systems were introduced to ensure the gentle handling of delicate fruits during the harvesting process [35]. A significant breakthrough came with the introduction of machine learning algorithms around 2013. These algorithms enabled the robotic systems to learn and adapt to different fruit varieties and environmental conditions, enhancing their ability to accurately identify and localize fruits [54][55][56][57]. By 2015, researchers had achieved simultaneous multi-fruit harvesting capability, a milestone that greatly increased the efficiency of fruit harvesting robots [58]. Furthermore, the development of robotic arms with multiple degrees of freedom allowed for more flexible and precise manipulation, further improving localization accuracy. In recent years, advancements in artificial intelligence (AI) have played a pivotal role. Integration of AI algorithms has enabled real-time assessment of fruit ripeness, allowing the robots to make decisions on the spot. Edge computing, introduced around 2021, further enhanced the speed and efficiency of AI processing directly on the robot, reducing reliance on external computational resources [59]. Furthermore, the integration of LiDAR technology has provided the capability for 3D mapping of orchard terrain. This allows robots to navigate and localize fruits in complex and dynamic environments [60][61]. Overall, researchers have employed a combination of computer vision, sensor technologies, machine learning, and AI algorithms to progressively refine the localization capabilities of fruit harvesting robots. These advancements have not only improved the efficiency and accuracy of fruit harvesting but also have the potential to revolutionize the agricultural industry by addressing labor shortages and increasing productivity. **Figure 1** shows the timeline of the significant contributions to the design and development of fruit-harvesting robotic arms in decades. It can be seen that there has been a major contribution to its development in the recent decade due to its growing demand in the agricultural sector.

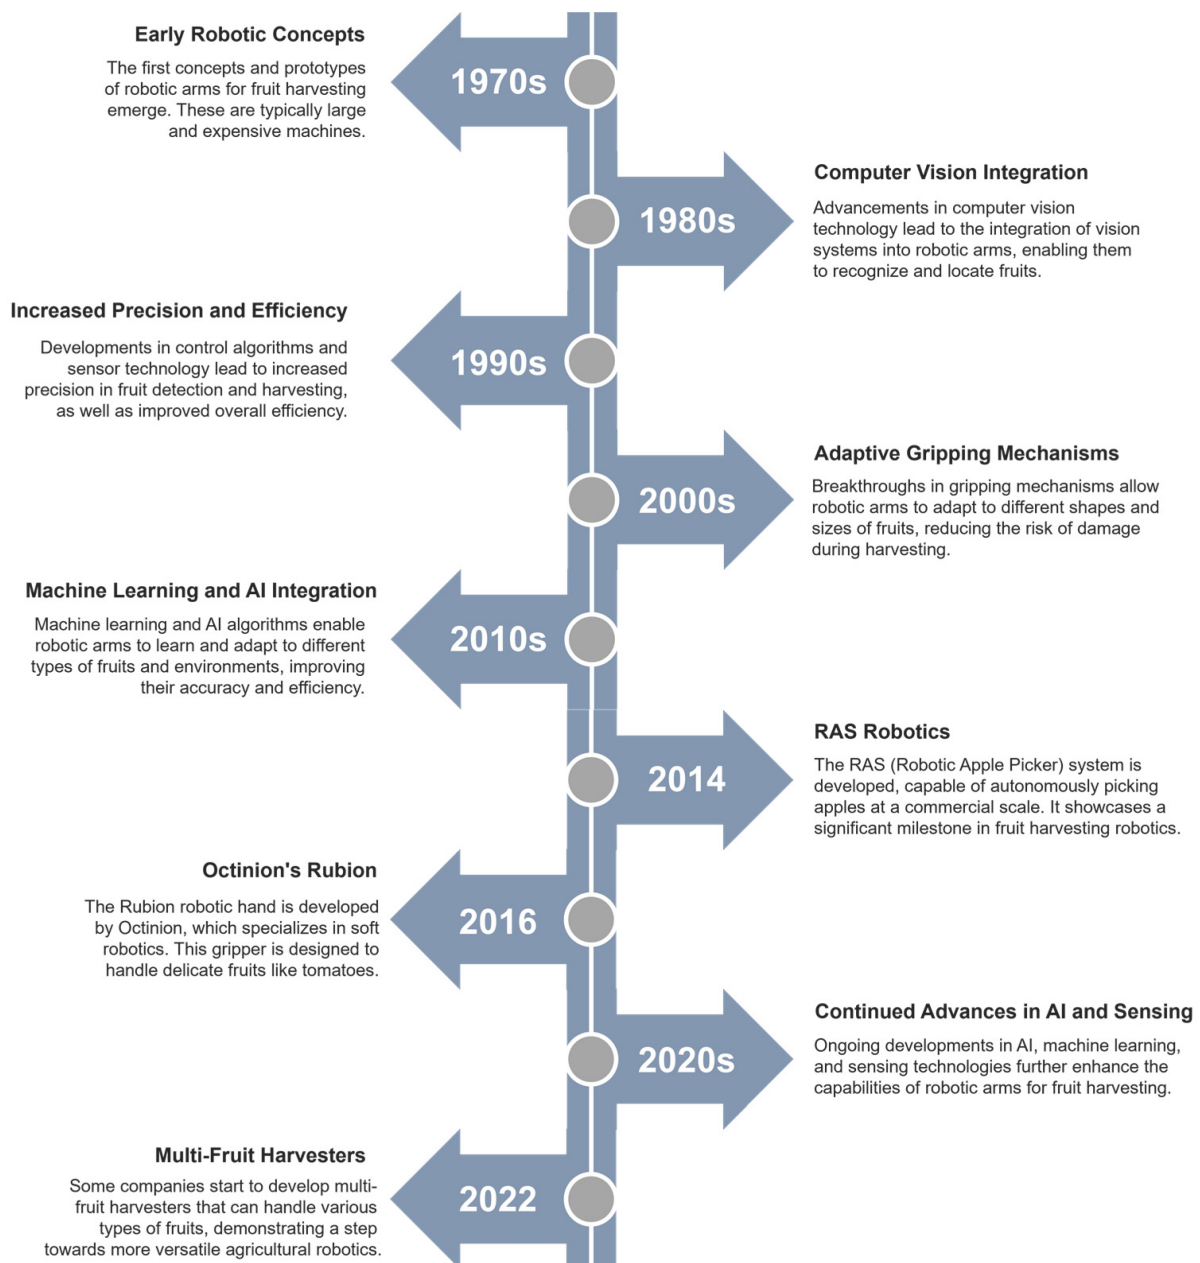

**Figure 1.** Timeline showing significant contributions in fruit-harvesting robotic arms development.

An autonomous robotic arm developed by for apple harvesting that comprises a custom-made end-effector. A Pentium IV 2 GHz PC with 1 GB RAM, Panasonic VR006L robotic arm, tractor, generator, and touch panel PC with HMI are used in the manufacturing of a prototype.

Huang <sup>[62]</sup> developed a robotic arm with a path-planning plate form simulated in MATLAB. Their focus is to find a solution for the end-effector harvester to reach its destination with high precision by implementing an inverse kinematics technique.

Another low-cost prototype for a fruit harvester is designed by <sup>[63]</sup> using a stereo vision camera. The vision system is installed in the end-effector so that the updated information related to arm movement is sent to the controller for

further necessary actions. The complete prototype is constructed using Minoru 3D for the vision system, DC gear motors, 3D printed arm parts using dimension SST 1200es, 3D printer, and an STM32F407VGT6 controller.

It is observed from the literature the main key issues are due to achieving low harvesting time, which was examined by [64]. A low-cost, high-speed robotic apple harvester has been proposed, which boasts the ability to sense, plan, and harvest. The entire prototype is mounted on a John Deere Gator electric utility vehicle and comprises a manipulator, custom-made end-effectors, TOF camera, and color camera. The detection of objects (apples in this case) is achieved using circular Hough transformation (CHT) and blob analysis (BA) techniques.

An autonomous sweet pepper recognition and tracking system has been developed using a simulation approach [65]. The simulation is carried out using MATLAB, V-REP, and ROS software for analysis. The algorithms are executed in MATLAB, and the real-time images captured by an external camera are filtered to remove color noise. The system's performance was evaluated using 78 images.

A real-time image processing algorithm is used to determine the location of fruit, and their kinematic solution is obtained using C# [66]. A mechanical custom-made end-effector is developed to detach the fruit, and the pressure required for the desired fruit is calculated precisely by determining the tolerable pressure. Visual tasks are carried out using a two-dimensional camera with the addition of a depth sensor. The results were validated using 100 images, demonstrating an acceptable level of accuracy in fruit localization and harvesting.

A geometrical solution that can transform the exact location of peduncle coordinates into robotic arm joint functions using a Convolutional Neural Network (CNN) is validated [67]. Kinect RGB-Depth camera is mounted on the robot for real-time image processing. The result validation shows a harvested success rate of about 52%.

Another robotic arm harvesting prototype based on deep learning techniques implemented for fruit harvesting and recognition are Point Net-based and Mobile-DasNet, respectively, which is designed in [68]. The complete prototype is customized using a Universal Robotic manipulator UR5, self-design end-effector, intel D-435 depth camera, and NVIDIA GTX-1070 GPU.

Feng incorporated laser technology into an apple-harvesting robot [69]. A laser vision system that allows the robot to accurately measure the distance to the target. This laser vision system enables the robot to perform a three-dimensional scan of the target scene, capturing detailed spatial geometry information and analyzing the relationship between the fruits and branches.

An integrated prototype is designed in [70], whose testing and validation are carried out in the greenhouse. The whole system is implemented by acquiring six Degree of Freedom (DOF) robotic arms, a Fotonic F80 depth camera, GPU, and PLC. The software counterpart in this model consists of C++ and ROS indigo on Ubuntu. Although attractive work is carried out, it has several drawbacks in terms of harvest success rate and detachment time.

A novel apple harvesting robot end effector that incorporates a pneumatic flexible actuator as a curved joint is created in [71]. This innovative design allows for a substantial output force, enabling the end effector to firmly grasp the target fruit with excellent flexibility. This breakthrough development has the potential to significantly enhance the efficiency and effectiveness of apple harvesting processes.

A localization-based detection and fruit harvesting prototype is prepared in [72] with a custom cutting mechanism. The proposed system contains a Braccio robotic arm, depth camera, and Arduino Due controller. The software part is established using MATLAB and Arduino IDE environment. The prototype has several limitations in terms of performance, and the system is not fully automated because, during testing, it requires some manual modification.

A closed-range vision-based chili harvesting robot with a custom end-effector is designed in [49]. The proposed manipulator detaches the chili using a suction and grasping mechanism. To minimize fruit damage, the detachment process is developed the same as manual harvesting. The prototype contains a laser diode, a laser receiver [73], five DOF manipulators, and a computer. The drawback of this design is a single trunk training model that works only on aligning a single trunk, so this type of prototype is not used for harvesting in a field environment.

Zhang designed a manipulator for an apple-picking robot and conducted experiments to study the control stability of the manipulator [74]. The control area was divided into a stretching area and a harvesting area to ensure smooth operation. The trial showed that once the robot ranges the target, the required stabilization time is less than two seconds. This suggests that the manipulator's control system is stable and capable of quickly stabilizing once it reaches the harvesting area.

Another designed prototype for an automated mushroom harvester is proposed in [75]. Special custom end-effectors are designed for the delicate control of mushrooms. The algorithm developed for localizing and identification of mushrooms is based on the calculated area of the mushroom top. The maximum diameter of the mushroom top harvested by the system is 75 mm. To solve the problem of low lightning conditions, a Phillips TLE 23Watt bulb is used near end-effectors to maintain a better environment for target identification by the vision system. The calculated damage rate claim by the author during the testing of the developed prototype is 3%.

Zhao has developed a robot for apple harvesting that features a 5° series joint with an integrated arm that has both lifting and telescopic capabilities [76]. The robot's performance was tested under controlled laboratory conditions, resulting in an 80% success rate, with a harvesting period of 15 s.

An Automated Robotic arm for the orange harvester was developed in [77]. The vision system for fruit identification is composed of two cameras (ZED Stereo camera and A4tecch Webcam) and one ultrasonic sensor. A stereo camera is used to detect orange trees by applying a green detection algorithm. A webcam is used to serve the end-effector to reach the fruit, and an ultrasonic sensor is used for the distance measurement of the fruit from the end-effector.

The intelligent fruit-harvesting robot designed by Gu was equipped with advanced technologies such as autonomous navigation, computer vision, and robotic arm control [78]. The robot was able to autonomously navigate through the orchard using sensors and algorithms to detect obstacles and plan its path. It could identify mature fruits using computer vision algorithms with a high recognition rate in the field of agricultural robotics.

Most of the above developments show that the basic aim of their work is the successful harvesting of fruit using an optimal detachment mechanism. Results claimed by the manufacturer in the previous developments are shown in **Table 1**.

**Table 1.** Overview of recent developments in automated fruit harvesting prototypes.

Ref.	Component/Equipment Used	Software/Algorithm Used	Performance Results	
[72]	Braccio Robotic Arm Arduino Due Intel real sense depth camera	MATLAB Arduino IDE	Localization success rate	37.7%
			Detachment success rate	65.5%
			Harvest success rate	24.7%
			Cycle time	7 s
[70]	Six DOF robotic arm Fotonic F80 camera Custom-built LED-based illumination GPU and PLC	C++ Python ROS Indigo on Ubuntu 14.04	The harvest success rates.	61%
			Cycle time	24 s
[64]	Seven DOF manipulator Custom end-effector Single CCD color camera TOF-based 3D camera	MATLAB C++ domain.	Localization success rate	100%
			The harvest success rates.	84.6%
			Cycle time	7.6 s
[65]	Logitech cam Supplementary halogen lamps Adafruit GPS breakout module Arduino Uno	V-REP ROS MATLAB	Localization success rate	94%
			Cycle time	2 s
[62]	servos (RX-64) Cine camera	MATLAB	N/A	
[67]	Kinect RGB-Depth camera 6 DOF ARM Custom made gripper	Mask R-CNN ROS	Fruit detection success	87%
			Cutting point detection	71%
			The harvest success	52%
[32]	Pentium IV 2 GHz PC with 1 GB RAM	Halcon Software	Fruit detection success	80%



Ref.	Component/Equipment Used	Software/Algorithm Used	Performance Results	
	Industrial robot (Panasonic VR006L) Touch panel PC with HMI Custom gripper		Fruit harvesting success	80%
			Cycle time	9 s
[68]	Universal Robot UR5 Customized soft end-effector. Intel D-435 camera NVIDIA GTX-1070 GPU	ROS Linux Ubuntu 16.04 RealSense package ROS MoveIt	DasNet Recognition success	91%
			Mobile-DasNet Recognitio success	90%
[66]	Custom made end-effector	C#	Detection success	85%
			Harvesting success	73%
[63]	Minoru 3D USB Webcam 3D printed robotic arm. STM32F407VGT6 controller	N/A	Distance error of	6%
			Cycle time	16 s
[49]	Five DOF robotic arm Infra-red laser diodes AC servo motors Computer	N/A	Localization success rate	60%
			Fruit harvesting success	80%
			Cycle time	14 s
[75]	486 DX 33 MHz Computer Fluorescent tube, Phillips TLE 23 W/29 Pulnix TM 500 camera	N/A	Localization success rate	70%
			Fruit harvesting success	76%
			Cycle time	8 s
[77]	Six DOF Robotic manipulator Electric cart Arduino Microcontroller ZED Stereo camera Webcam (A4tecch) Ultrasonic Sensor (US-100)	Arduino IDE Green Detection Algorithm Open CV Library Visual Studio	Localization success rate	75%
			Fruit harvesting success	85%
			Cycle time	9.41 s

fruits by the vision systems. Harvesting success rate is the ratio of total number of fruits harvested and the number of fruits detected by the system.

References

1. Kanade, P.; Alva, P.; Kanade, S.; Ghatwal, S. Automated Robot ARM using Ultrasonic Sensor in Assembly Line. *Int. Res. J. Eng. Technol.* 2020, 7, 615–620.

2. Racu, C.M.; Doroftei, I.; Plesu, G.; Doroftei, I.A. Simulation of an ankle rehabilitation system based on scotch-yoke mechanism. *IOP Conf. Ser. Mater. Sci. Eng.* 2016, 147, 012084.



3. Fountas, S.; Mylonas, N.; Malounas, I.; Rodias, E.; Santos, C.H.; Pekkeriet, E. Agricultural robotics for field operations. *Sensors* 2020, 20, 2672.
4. Ghute, M.S. Design of Military Surveillance Robot. In *Proceedings of the 2018 First International Conference on Secure Cyber Computing and Communication (ICSCCC)*, Jalandhar, India, 15–17 December 2018; pp. 270–272.
5. Kumar, P.; Ashok, G. Design and fabrication of smart seed sowing robot. *Mater. Today Proc.* 2020, 39, 354–358.
6. Blasco, J.; Aleixos, N.; Roger, J.M.; Rabatel, G.; Moltó, E. Robotic weed control using machine vision. *Biosyst. Eng.* 2002, 83, 149–157.
7. Wang, Y.; Xie, L.; Wang, H.; Zeng, W.; Ding, Y.; Hu, T.; Zheng, T.; Liao, H.; Hu, J. Intelligent spraying robot for building walls with mobility and perception. *Autom. Constr.* 2022, 139, 104270.
8. Chaudhury, A.; Ward, C.; Talasaz, A.; Ivanov, A.G.; Huner, N.P.; Grodzinski, B.; Patel, R.V.; Barron, J.L. Computer Vision Based Autonomous Robotic System for 3D Plant Growth Measurement. In *Proceedings of the 2015 12th Conference on Computer and Robot Vision*, Halifax, NS, Canada, 3–5 June 2015; pp. 290–296.
9. Chen, G.; Muriki, H.; Sharkey, A.; Pradalier, C.; Chen, Y.; Dellaert, F. A Hybrid Cable-Driven Robot for Non-Destructive Leafy Plant Monitoring and Mass Estimation using Structure from Motion. In *Proceedings of the 2023 IEEE International Conference on Robotics and Automation (ICRA)*, London, UK, 29 May–2 June 2023.
10. Concepcion, R., II; Lauguico, S.; Valenzuela, I.; Bandala, A.; Dadios, E. Denavit-Hartenberg-based Analytic Kinematics and Modeling of 6R Degrees of Freedom Robotic Arm for Smart Farming. *J. Comput. Innov. Eng. Appl.* 2021, 5, 1–7.
11. Lauguico, S.C.; Concepcion, R.S.; MacAsaet, D.D.; Alejandrino, J.D.; Bandala, A.A.; Dadios, E.P. Implementation of Inverse Kinematics for Crop-Harvesting Robotic Arm in Vertical Farming. In *Proceedings of the 2019 IEEE International Conference on Cybernetics and Intelligent Systems (CIS) and IEEE Conference on Robotics, Automation and Mechatronics (RAM)*, Bangkok, Thailand, 18–20 November 2019; pp. 298–303.
12. Peters, C.J.; Bills, N.L.; Wilkins, J.L.; Fick, G.W. Foodshed analysis and its relevance to sustainability. *Renew. Agric. Food Syst.* 2009, 24, 1–7.
13. Davis, K.F.; Gephart, J.A.; Emery, K.A.; Leach, A.M.; Galloway, J.N.; D’Odorico, P. Meeting future food demand with current agricultural resources. *Glob. Environ. Change* 2016, 39, 125–132.
14. Chand, R.; Srivastava, S.K. Changes in the rural labour market and their implications for agriculture. *Econ. Polit. Wkly.* 2014, 49, 47–54.

15. Mutekwa, V.T. Climate change impacts and adaptation in the agricultural sector: The case of smallholder farmers in Zimbabwe. *J. Sustain. Dev. Afr.* 2009, 11, 237–256.
16. Siche, R. What is the impact of COVID-19 disease on agriculture? *Sci. Agropecu.* 2020, 11, 3–6.
17. Martini, M.; Gazzaniga, V.; Bragazzi, N.L.; Barberis, I. The Spanish Influenza Pandemic: A lesson from history 100 years after 1918. *J. Prev. Med. Hyg.* 2019, 60, E64–E67.
18. Corley, A.; Hammond, N.E.; Fraser, J.F. The experiences of health care workers employed in an Australian intensive care unit during the H1N1 Influenza pandemic of 2009: A phenomenological study. *Int. J. Nurs. Stud.* 2010, 47, 577–585.
19. Piot, P.; Bartos, M.; Ghys, P.D.; Walker, N.; Schwartlander, B. The global impact of HIV/AIDS. *Nature* 2001, 410, 968–973.
20. Chandler, A. Fruit and Veg Risk Rotting in Australia on Second COVID-19 Wave. Available online: <https://www.bnnbloomberg.ca/fruit-and-veg-risk-rotting-in-australia-on-second-COVID-19-wave-1.1469292> (accessed on 22 October 2023).
21. Jain, R.; Meena, M.L.; Dangayach, G.S.; Bhardwaj, A.K. Risk factors for musculoskeletal disorders in manual harvesting farmers of Rajasthan. *Ind. Health* 2018, 56, 241–248.
22. Singerman, A.; Burani-Arouca, M.; Futch, S.H. Harvesting Charges for Florida Citrus: Picking, Roadsiding, and Hauling, 2015/16. *EDIS* 2017, 2017, 1–5.
23. Ampatzidis, Y.G.; Vougioukas, S.G.; Whiting, M.D.; Zhang, Q. Applying the machine repair model to improve efficiency of harvesting fruit. *Biosyst. Eng.* 2014, 120, 25–33.
24. Ceres, R.; Pons, J.L.; Jiménez, A.R.; Martín, J.M.; Calderón, L. Design and implementation of an aided fruit-harvesting robot (Agribot). *Ind. Rob.* 1998, 25, 337–346.
25. Kondo, N.; Monta, M.; Fujiura, T. Fruit harvesting robots in Japan. *Adv. Space Res.* 1996, 18, 181–184.
26. Edan, Y. Design of an autonomous agricultural robot. *Appl. Intell.* 1995, 51, 41–50.
27. Plebe, A.; Grasso, G. Localization of spherical fruits for robotic harvesting. *Mach. Vis. Appl.* 2001, 13, 70–79.
28. Yoshikawa, T. Manipulability and redundancy control of robotic mechanisms. In *Proceedings of the 1985 IEEE International Conference on Robotics and Automation*, St. Louis, MO, USA, 25–28 March 1985; pp. 1004–1009.
29. Allotta, B.; Buttazzo, G.; Dario, P.; Quaglia, F.; Levi, P. A force/torque sensor-based technique for robot harvesting of fruits and vegetables. In *Proceedings of the IEEE International Workshop on Intelligent Robots and Systems, Towards a New Frontier of Applications*, Ibaraki, Japan, 3–6 July 1990; pp. 231–235.

30. Friedrich, W.E.; Lim, P.K. Smart End-effector Sensing for Variable Object Handling. In *Field and Service Robotics*; Springer: Berlin/Heidelberg, Germany, 1998; pp. 447–450.
31. Jia, B.; Zhu, A.; Yang, S.X.; Mittal, G.S. Integrated gripper and cutter in a mobile robotic system for harvesting greenhouse products. In *Proceedings of the 2009 IEEE International Conference on Robotics and Biomimetics (ROBIO)*, Guilin, China, 19–23 December 2009; pp. 1778–1783.
32. Baeten, J.; Donné, K.; Boedrij, S.; Beckers, W.; Claesen, E. Autonomous fruit picking machine: A robotic apple harvester. In *Field and Service Robotics; Springer Tracts in Advanced Robotics*; Springer: Berlin/Heidelberg, Germany, 2008; Volume 42, pp. 531–539.
33. Hayashi, S.; Shigematsu, K.; Yamamoto, S.; Kobayashi, K.; Kohno, Y.; Kamata, J.; Kurita, M. Evaluation of a strawberry-harvesting robot in a field test. *Biosyst. Eng.* 2010, 105, 160–171.
34. Paradkar, V.; Raheman, H.; Rahul, K. Development of a metering mechanism with serial robotic arm for handling paper pot seedlings in a vegetable transplanter. *Artif. Intell. Agric.* 2021, 5, 52–63.
35. Kultongkham, A.; Kumnon, S.; Thintawornkul, T.; Chanthsopeephan, T. The design of a force feedback soft gripper for tomato harvesting. *J. Agric. Eng.* 2021, 52, 1090.
36. Chen, J.I.-Z.; Chang, J.-T. Applying a 6-axis Mechanical Arm Combine with Computer Vision to the Research of Object Recognition in Plane Inspection. *J. Artif. Intell. Capsul. Netw.* 2020, 2, 77–99.
37. Bu, L.; Chen, C.; Hu, G.; Sugirbay, A.; Sun, H.; Chen, J. Design and evaluation of a robotic apple harvester using optimized picking patterns. *Comput. Electron. Agric.* 2022, 198, 107092.
38. Williams, H.A.; Jones, M.H.; Nejati, M.; Seabright, M.J.; Bell, J.; Penhall, N.D.; Barnett, J.J.; Duke, M.D.; Scarfe, A.J.; Ahn, H.S.; et al. Robotic kiwifruit harvesting using machine vision, convolutional neural networks, and robotic arms. *Biosyst. Eng.* 2019, 181, 140–156. Available online: <https://www.sciencedirect.com/science/article/pii/S153751101830638X> (accessed on 5 October 2023).
39. Kouritem, S.A.; Abouheaf, M.I.; Nahas, N.; Hassan, M. A multi-objective optimization design of industrial robot arms. *Alex. Eng. J.* 2022, 61, 12847–12867. Available online: <https://www.sciencedirect.com/science/article/pii/S1110016822004355> (accessed on 5 October 2023).
40. Arikapudi, R.; Vougioukas, S.G. Robotic Tree-fruit harvesting with arrays of Cartesian Arms: A study of fruit pick cycle times. *Comput. Electron. Agric.* 2023, 211, 108023. Available online: <https://www.sciencedirect.com/science/article/pii/S0168169923004118> (accessed on 5 October 2023).
41. Sarig, Y. Robotics of Fruit Harvesting: A State-of-the-art Review. *J. Agric. Eng. Res.* 1993, 54, 265–280.

42. Van Kollenburg-Crisan, L.M.; Bontsema, J.; Wennekes, P. Mechatronic System for Automatic Harvesting of Cucumbers. *IFAC Proc.* Vol. 1998, 31, 289–293.
43. Jiménez, A.R.; Ceres, R.; Pons, J.L. A Survey of Computer Vision Methods for Locating Fruit on Trees. *Trans. ASAE* 2000, 43, 1911–1920.
44. Edan, Y.; Rogozin, D.; Flash, T.; Miles, G.E. Robotic melon harvesting. *IEEE Trans. Robot. Autom.* 2000, 16, 831–835.
45. Harrell, R.C.; Slaughter, D.C.; Adsit, P.D. A fruit-tracking system for robotic harvesting. *Mach. Vis. Appl.* 1989, 2, 69–80.
46. Slaughter, D.C.; Harrell, R.C. Color Vision in Robotic Fruit Harvesting. *Trans. ASAE* 1987, 30, 1144–1148.
47. Harrell, R.C.; Adsit, P.D.; Pool, T.A.; Hoffman, R. The Florida Robotic Grove-Lab. *Trans. ASAE* 1990, 33, 391–399.
48. Guo, J.; Zhao, D.A.; Ji, W.; Xia, W. Design and control of the open apple-picking-robot manipulator. In *Proceedings of the 2010 3rd International Conference on Computer Science and Information Technology*, Chengdu, China, 9–11 July 2010; pp. 5–8.
49. Tanigaki, K.; Fujiura, T.; Akase, A.; Imagawa, J. Cherry-harvesting robot. *Comput. Electron. Agric.* 2008, 63, 65–72.
50. Scimeca, L.; Maiolino, P.; Cardin-Catalan, D.; Pobil, A.P.D.; Morales, A.; Iida, F. Non-destructive robotic assessment of mango ripeness via multi-point soft haptics. In *Proceedings of the 2019 International Conference on Robotics and Automation (ICRA)*, Montreal, QC, Canada, 20–24 May 2019; pp. 1821–1826.
51. Neupane, C.; Koirala, A.; Wang, Z.; Walsh, K.B. Evaluation of Depth Cameras for Use in Fruit Localization and Sizing: Finding a Successor to Kinect v2. *Agronomy* 2021, 11, 1780.
52. Ge, Y.; Xiong, Y.; Tenorio, G.L.; From, P.J. Fruit Localization and Environment Perception for Strawberry Harvesting Robots. *IEEE Access* 2019, 7, 147642–147652.
53. Sarabu, H.; Ahlin, K.; Hu, A.P. Leveraging Deep Learning and RGB-D Cameras for Cooperative Apple-Picking Robot Arms. In *Proceedings of the 2019 ASABE Annual International Meeting*, Boston, MA, USA, 7–10 July 2019; p. 1.
54. Tang, Y.; Chen, M.; Wang, C.; Luo, L.; Li, J.; Lian, G.; Zou, X. Recognition and Localization Methods for Vision-Based Fruit Picking Robots: A Review. *Front. Plant Sci.* 2020, 11, 520170.
55. Onishi, Y.; Yoshida, T.; Kurita, H.; Fukao, T.; Arihara, H.; Iwai, A. An automated fruit harvesting robot by using deep learning. *ROBOMECH J.* 2019, 6, 13.

56. Sun, T.; Zhang, W.; Miao, Z.; Zhang, Z.; Li, N. Object localization methodology in occluded agricultural environments through deep learning and active sensing. *Comput. Electron. Agric.* 2023, 212, 108141.
57. Li, T.; Fang, W.; Zhao, G.; Gao, F.; Wu, Z.; Li, R.; Fu, L.; Dhupia, J. An improved binocular localization method for apple based on fruit detection using deep learning. *Inf. Process. Agric.* 2023, 10, 276–287.
58. Yu, Y.; Zhang, K.; Yang, L.; Zhang, D. Fruit detection for strawberry harvesting robot in non-structural environment based on Mask-RCNN. *Comput. Electron. Agric.* 2019, 163, 104846.
59. Huang, X.R.; Chen, W.H.; Hu, W.C.; Chen, L.B. An AI Edge Computing-Based Robotic Arm Automated Guided Vehicle System for Harvesting Pitaya. In *Proceedings of the 2022 IEEE International Conference on Consumer Electronics (ICCE)*, Las Vegas, NV, USA, 7–9 January 2022.
60. Geer, L.; Gu, D.; Wang, F.; Mohan, V.; Dowling, R. Novel Software Architecture for an Autonomous Agricultural Robotic Fruit Harvesting System. In *Proceedings of the 2022 27th International Conference on Automation and Computing (ICAC)*, Bristol, UK, 1–3 September 2022.
61. Vrochidou, E.; Tziridis, K.; Nikolaou, A.; Kalampokas, T.; Papakostas, G.A.; Pachidis, T.P.; Mamalis, S.; Koundouras, S.; Kaburlasos, V.G. An Autonomous Grape-Harvester Robot: Integrated System Architecture. *Electronics* 2021, 10, 1056.
62. Huang, G.S.; Tung, C.K.; Lin, H.C.; Hsiao, S.H. Inverse kinematics analysis trajectory planning for a robot arm. In *Proceedings of the 2011 8th Asian Control Conference (ASCC)*, Kaohsiung, Taiwan, 15–18 May 2011; pp. 965–970.
63. Font, D.; Pallejà, T.; Tresanchez, M.; Runcan, D.; Moreno, J.; Martínez, D.; Teixidó, M.; Palacín, J. A proposal for automatic fruit harvesting by combining a low cost stereovision camera and a robotic arm. *Sensors* 2014, 14, 11557–11579.
64. Silwal, A.; Davidson, J.R.; Karkee, M.; Mo, C.; Zhang, Q.; Lewis, K. Design, integration, and field evaluation of a robotic apple harvester. *J. Field Robot.* 2017, 34, 1140–1159.
65. Ivanova, N.; Gugleva, V.; Dobрева, M.; Pehlivanov, I.; Stefanov, S.; Andonova, V. We Are IntechOpen, the World's Leading Publisher of Open Access Books Built by Scientists, for Scientists TOP 1%; Intech: London, UK, 2016; Volume i, p. 13.
66. Kahya, E.; Arın, S. Design of a Robotic Pneumatic Pruner for Robotic Apple Harvesting. *Turk. Eur. J. Eng. Nat. Sci.* 2019, 3, 11–17.
67. Zhang, T.; Huang, Z.; You, W.; Lin, J.; Tang, X.; Huang, H. An autonomous fruit and vegetable harvester with a low-cost gripper using a 3D sensor. *Sensors* 2020, 20, 93.

68. Kang, H.; Zhou, H.; Wang, X.; Chen, C. Real-time fruit recognition and grasping estimation for robotic apple harvesting. *Sensors* 2020, 20, 5670.
69. Feng, J.; Liu, G.; Si, Y.; Wang, S.; Zhou, W. Construction of laser vision system for apple harvesting robot. *Nongye Gongcheng Xuebao/Trans. Chin. Soc. Agric. Eng.* 2013, 29 (Suppl. S1), 32–37.
70. Arad, B.; Balendonck, J.; Barth, R.; Ben-Shahar, O.; Edan, Y.; Hellström, T.; Hemming, J.; Kurtser, P.; Ringdahl, O.; Tielen, T.; et al. Development of a sweet pepper harvesting robot. *J. Field Robot.* 2020, 37, 1027–1039.
71. Bao, G.; Zhang, S.; Chen, L.; Yang, Q. Design of spherical fruit end-grasper based on FPA. *Trans. Chin. Soc. Agric.* 2013, 44, 242–246.
72. Masood, M.U.; Haghshenas-Jaryani, M. A study on the feasibility of robotic harvesting for chile pepper. *Robotics* 2021, 10, 94.
73. Lescure, M. A Scanning Range Finder using the Self-Mixing Effect inside a Laser Diode for 3-D vision. In *Quality Measurement: The Indispensable Bridge between Theory and Reality (No Measurements? No Science! Joint Conference—1996: IEEE Instrumentation and Measurement Technology Conference and IMEKO Tec, Brussels, Belgium, 4–6 June 1996; IEEE: Piscataway, NJ, USA, 1996; pp. 226–231.*
74. Zhang, Z.Y.; He, D.J.; Zhang, J.F. Research on controlled system of apple picking robot arm. *J. Chin. Agric. Univ.* 2008, 13, 78–82.
75. Reed, J.N.; Miles, S.J.; Butler, J.; Baldwin, M.; Noble, R. Automatic Mushroom Harvester Development. *J. Agric. Eng. Res.* 2001, 78, 15–23.
76. De-An, Z.; Jidong, L.; Wei, J.; Ying, Z.; Yu, C. Design and control of an apple harvesting robot. *Biosyst. Eng.* 2011, 110, 112–122.
77. Almendral, K.A.M.; Babaran, R.M.G.; Carzon, B.J.C.; Cu, K.P.K.; Lalanto, J.M.; Abad, A.C. Autonomous Fruit Harvester with Machine Vision. *J. Telecommun. Electron. Comput. Eng.* 2018, 10, 79–86.
78. Gu, B.; Ji, C.; Tian, G.; Zhang, G.; Wang, L. Design and experiment of intelligent mobile fruit picking robot. *Nongye Jixie Xuebao/Trans. Chin. Soc. Agric. Mach.* 2012, 43, 153–160.

---

Retrieved from <https://encyclopedia.pub/entry/history/show/117763>