

Sustainable Valorization of Sugarcane Waste from Sugarcane Processing

Subjects: [Environmental Sciences](#)

Contributor: Nicoleta Ungureanu , Valentin Vlăduț , Sorin-Ștefan Biriș

Sugarcane is a lignocellulosic crop and the juice extracted from its stalks provides the raw material for 86% of sugar production. Globally, sugarcane processing to obtain sugar and/or ethanol generates more than 279 million tons of solid and liquid waste annually, as well as by-products; namely, straws, bagasse, press mud, wastewater, ash from bagasse incineration, vinasse from ethanol distillation, and molasses. If not properly managed, this waste will pose risks to both environmental factors and human health. Valorization of waste has gained momentum, having an important contribution to the fulfillment of policies and objectives related to sustainable development and circular bioeconomy. Various technologies are well-established and implemented for the valorization of waste and by-products from sugarcane processing, while other innovative technologies are still in the research and development stage, with encouraging prospects.

biomass

pretreatment

cogeneration

bioethanol

bio-hydrogen

compost

fertilizer

wastewater

1. Introduction

Sugarcane, *Saccharum officinarum* L. (Poaceae), a perennial plant with thick and fibrous stems, is traditionally cultivated in more than 110 countries in the tropical and temperate regions of the world ^[1], occupying a production area of 27 million hectares ^[2]. In the period 2000–2019, the sugarcane crop accounted for 21% of global crop production ^[3]. Simultaneously, with the worldwide increase in the areas cultivated with sugarcane, there is also an increase in the demand for products derived from this sugar plant.

Sugarcane crops provide the raw material for 86% of the sugar produced globally (the remaining 14% being mostly obtained from sugar beet crops) ^[4]. In 2020, 1869.7 million tons of sugarcane were harvested worldwide, of which there were 757.1 million tons in Brazil, 370.5 million tons in India, 108.1 million tons in China, 81 million tons in Pakistan, 75 million tons in Thailand, 54 million tons in Mexico, 32.7 million tons in the USA, and 30.3 million tons in Australia ^[5]. The percentage distribution of sugarcane production by the top five major producing countries is as follows: 40% in Brazil, 20% in India, 7% in China, 6% in Thailand, and 5% in Africa ^[6].

From a physical point of view, sugarcane is made up of four major fractions; namely, fiber, insoluble solids, soluble solids, and water, and their relative size depends on the agro-industrial process of sugar extraction. The fibers are composed of the organic solid fractions originally found in the cane stem and are very heterogeneous. Insoluble

solids (the fraction that cannot be dissolved in water) are mainly constituted by inorganic substances (rocks, soil, and other foreign materials) and depend on the agricultural conditions of cane processing, such as the type of cutting practiced and the type of harvesting. Soluble solids (the fraction that can be dissolved in water) are mainly composed of sucrose and may contain other chemical components in smaller proportions (such as wax).

Sugarcane contains 53.6% juice (wet basis) and 26.7% fiber (dry basis) [7]. It is a plant rich in sugars (glucose, fructose, and sucrose), amino acids, and organic acids [8].

Sugarcane crop is harvested manually or mechanically every 6 months, then it is cut into pieces and transported to the processing plants, which are usually located in the vicinity of sugarcane fields, as the crop begins to deteriorate the next day after harvesting [7]. Sugarcane processing factories can be classified into three categories [9]: factories that only produce raw table sugar; plants that produce only ethanol; integrated plants, which produce both raw sugar and ethanol (these account for 80% of the plants). The juice extracted by pressing the stems is used in most cases to obtain table sugar and less to obtain ethanol [10]. In Brazil, the country with the largest sugarcane production, 90% of the harvested sugarcane is used to produce both sugar and ethanol, while only 7% of the crop is used to produce only ethanol and 3% to produce only sugar [11].

2. Waste and By-Products Generated in Sugarcane Processing

2.1. Waste and By-Product Generation Flow in Sugarcane Processing Factories

In any sector of the food industry, food production is carried out with significant energy consumption, and relatively large amounts of waste result from the technological processes. Thus, major issues related to food technologies are energy and waste management.

In the sugar industry, approximately 279 million metric tons of sugarcane waste are generated annually worldwide [12]. From the global amount of sugarcane waste, South Africa has an annual share of over 1.353 million metric tons, of which more than 50% are recovered in cogeneration facilities [13]. The uncontrolled disposal of sugarcane waste can generate major problems on the environmental factors and, by consequence, on human health.

These wastes are of a solid, semi-solid, and liquid nature and can be classified into two categories: waste from the harvesting operation, represented by leaves and cane tips; and waste from the cane processing stream (**Figure 1**), including bagasse, ash from bagasse incineration, press mud (sludge from juice settling and residual cake from juice filtration), wastewater, vinasse, and molasses.

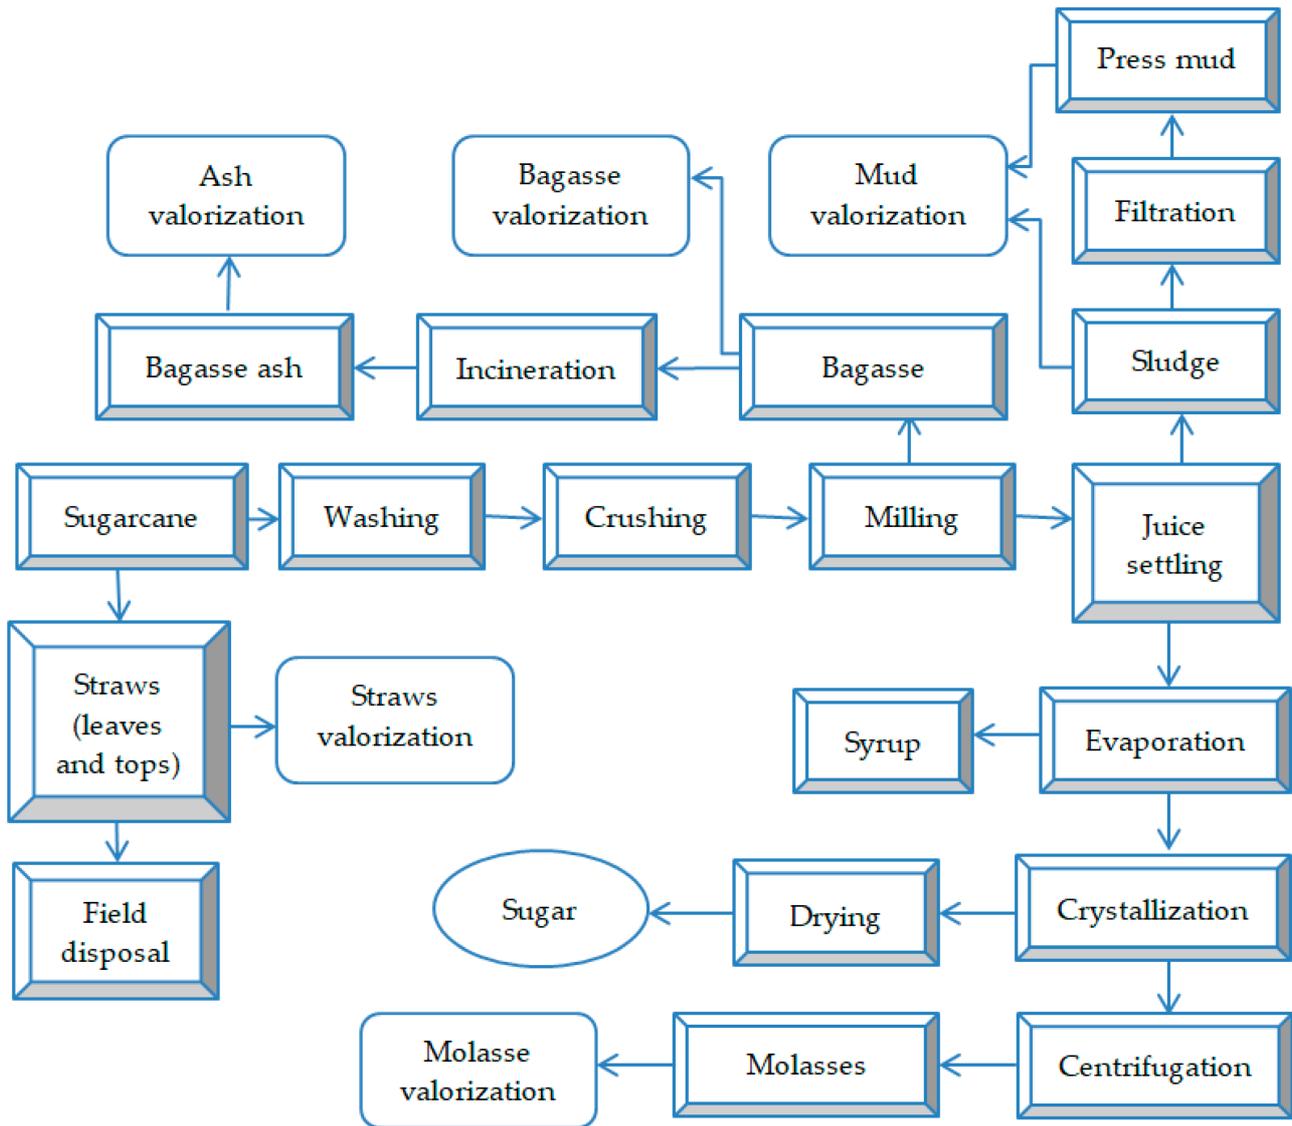


Figure 1. Sustainable technological flow of cane sugar production, highlighting the generated waste and by-products.

Typically, crushing a ton of sugarcane yields about 280–300 kg of bagasse (wet basis) with 50% moisture content, 30 kg of press mud (wet basis), and 41 kg of molasses [14].

The energy content of one ton of sugarcane is 6560 MJ, distributed as follows: 2110 MJ in 280 kg of leaves and tops (50% moisture), 2110 MJ in 280 kg of bagasse (50% moisture), and 2340 MJ in 140 kg of sugar [15].

Currently, the global priority is not only to mitigate the environmental impact already caused by human and industrial activities, but also to respond to the need to produce more food and energy for a population estimated to exceed 10 billion people by 2050.

2.2. Sugarcane Leaves and Tops (Straws)

Sugarcane leaves and tops (also called straws or sugarcane litter) are lignocellulosic materials whose chemical composition varies depending on the stage of development and variety of the plant, place of collection, and climatic conditions. According to [16], these wastes have an approximate composition of 40% cellulose, 25% hemicellulose, and 18–20% lignin.

From one ton of sugarcane, between 270–280 kg of leaves and tops remain as harvesting waste [15][17]. Sugarcane straws can contain up to 5% m/m impurities (sand and other debris) due to transport and harvesting operations [18]. If these impurities would reach the cane processing plant, they would cause wear of the mill rolls [19].

Many times, these wastes are conventionally disposed by direct burning in the field [15][20]. Moreover, when traditional manual harvesting is used, farmers set fire to the sugarcane plantations before harvesting to burn off the sharp leaves and facilitate the manual cutting of the stalks. This practice contributes to severe air pollution with suspended particles, the occurrence of severe respiratory diseases in the affected area, and greenhouse gas emissions. In addition, polycyclic aromatic hydrocarbons formed during incineration will pollute both the soil and water.

The valorization of cane leaves and tips is practiced on some plantations. If the sugarcane crop is harvested while it is still green, the cane leaves and tips are left as such in the field as a vegetable mulch, to control weeds, reduce water evaporation from the soil, and return carbon and nutrients to the soil [6], thus contributing to the improvement of soil properties [21]. This waste can also be collected manually or mechanically and briquetted or pelletized for incineration for energy purposes [22]. In laboratory experiments, second-generation ethanol with a yield of 156 L/t was obtained from cellulose and hemicellulose mixtures extracted from sugarcane tops and leaves, thermochemically treated by alkaline catalysis, and subjected to simultaneous saccharification and fermentation [6].

2.3. Sugarcane Bagasse

2.3.1. Characterization of Sugarcane Bagasse

Bagasse is the primary industrial fibrous residue obtained after pressing (crushing) of sugarcane stalks in order to extract the juice. When processing one ton of sugarcane, between 0.25–0.30 tons of bagasse are obtained [23]. In factories in Brazil, 0.28 tons of bagasse are typically generated [24]. According to other studies, 0.14 tons of bagasse (dry mass) and 0.14 tons of straw (stems) are obtained from one ton of sugarcane [15][25].

It is also estimated that over 700 million tons of bagasse are produced annually worldwide [26], i.e., between 40–50% of the total weight of sugarcane produced annually in the world [27]. In only the top ten countries in terms of sugarcane production, more than 540 million tons of bagasse are generated annually [28].

The chemical composition of sugarcane bagasse varies with plant variety, cultivation conditions, harvesting practices, and processing methods. Sugarcane bagasse contains 45–50% water, 2–5% dissolved sugars and 40–45% fiber [29], and 60–80% carbohydrates [30]. Like any natural vegetable fiber, sugarcane bagasse has a fibrous

structure consisting of cellulose, hemicellulose, and lignin [31], with different values of these components being presented in the literature.

2.3.2. Uncontrolled Disposal of Sugarcane Bagasse

A significant amount of bagasse is disposed of uncontrollably in the form of waste piles directly on open land [32], which inevitably leads to environmental pollution due to the release of unpleasant odors that attract insects and other pests, and sometimes due to accidental occurrence of self-igniting fires.

Even the temporary storage of excess bagasse remaining on the technological flow, which can represent up to 50% of the bagasse produced in the sugar factory [33], has negative consequences on the environment. Uncontrolled disposal and landfills are the most unsustainable option for managing sugarcane wastes.

2.3.3. Valorization of Sugarcane Bagasse

In large sugarcane-growing countries, bagasse is an important type of waste that can be recovered [34], and there are currently more than 40 different uses for it [35]. Approximately 58–76% of the wet mass of bagasse is composed of polysaccharides that can be hydrolyzed into monosaccharides (glucose and xylose) and then transformed by microbial fermentation into biofuels, enzymes, proteins, lipids, feed, and other biochemical substances [36].

Incineration of Sugarcane Bagasse for Energy Recovery

Sugarcane bagasse with a moisture content of approximately 48% has a calorific value of 8021 kJ/kg [37] and is usually valorized as fuel in cogeneration plants to produce thermal energy (steam) and electricity [38][39]. These energy products can provide the necessary thermal and electrical energy for the operation of the sugar factory [40][41], and the eventual energy surplus is transferred to the national electrical network [42][43].

For example, India annually generates between 75–90 million tons of bagasse (wet mass) [44], which it mainly uses through incineration with cogeneration (electricity and heat generation) in medium and large sugar factories. In Brazil, the energy recovery of one ton of bagasse generates 12 kWh of electrical energy, 330 kWh of thermal energy (steam), and 16 kWh of mechanical energy [45].

In sugar mills, thermal energy and mechanical energy obtained by bagasse incineration are used to drive milling equipment, and electrical energy is used to drive rotating equipment in the factory during the harvest season [7].

Bagasse incineration is, however, associated with large volumes of CO₂ emissions that contribute significantly to the global warming faced by all of humanity today [24][46].

2.4. Residual Ash from Bagasse Incineration

2.4.1. Characterization of Sugarcane Bagasse Ash

Figure 2 shows a simplified production flow in the sugar factory. After extracting the sugary juice from the sugarcane, the sugarcane bagasse remains as waste. Bagasse represents approximately 50% of the composition of the sugarcane and is, in most factories, incinerated for energy purposes. After its incineration, bagasse ash (consisting of fly ash and bottom ash) will remain as the final waste from the sugar production stream [47].

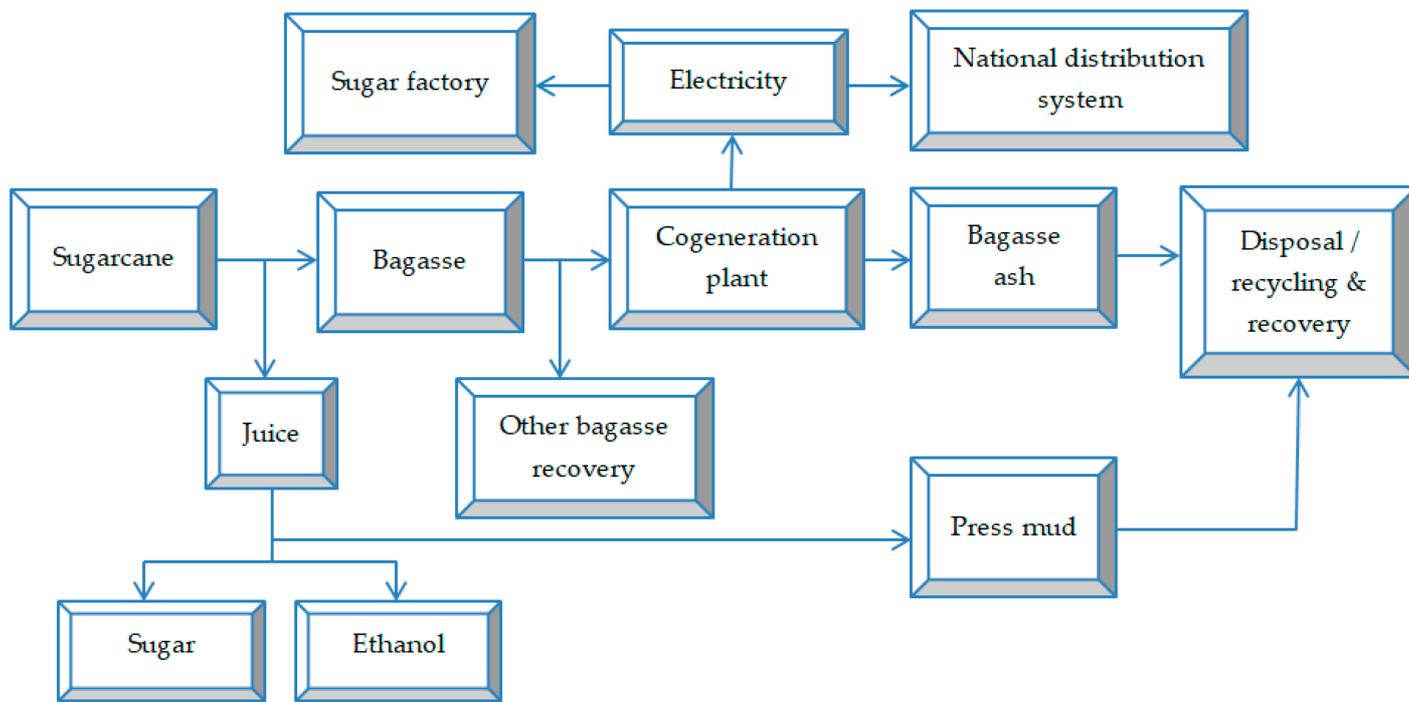


Figure 2. Typical generation flow of bagasse ash in a cogeneration plant sugar factory.

Following the incineration of a ton of sugarcane bagasse, between 25–45 kg of ash is generated [48], of which fly ash represents only 5–6.6 kg [49]. In Brazil, approximately 148 million tons of bagasse are produced annually, generating 3.6 million tons of bagasse ash, considering that for each ton of processed sugarcane, around 250 kg of bagasse are obtained, whose combustion results in 6 kg of ash. In China, between 1.25–2 million tons of sugarcane bagasse ash are produced annually [50], and Australia generates over 230 thousand tons of bagasse ash [41].

2.4.2. Valorization of Sugarcane Bagasse Ash

The utilization of bagasse ash can be achieved, at the present time, through different possibilities.

Bagasse ash can be applied as an amendment for agricultural land [16], although it does not contain a sufficient concentration of mineral nutrients and will therefore be a fertilizer with low nutritional value. To increase its nutrient content, ash can be mixed with sludge from cane juice filtration or vinasse from ethanol distillation. Another problem related to the utilization of ash as fertilizer in agriculture is its content of heavy metals (aluminum, chromium, lead) and total phenol, whose values exceed the levels allowed by many national standards [48][50]. These chemical pollutants accumulate in the soil (from where they are transferred to the food chain) and can also

pollute groundwater, thus triggering potentially serious problems from an agronomic, environmental, and human health point of view.

Solid fuels were obtained by briquetting bagasse ash [47][51][52] in the presence of binders or additives. The additives also come from biomass waste or ecological materials, so the use of these solid biofuels contributes to reducing the carbon footprint and protecting the environment. The briquettes obtained in study [47] were starch, obtained from flour of tropical root cassava used as a binder, and presented good mechanical and thermal properties, having an average density of 1.12 g/cm³ and an average calorific value of 25.551 kJ/kg. By carbonizing sugarcane bagasse, ecological coal was obtained which was then added with clay and sugarcane molasses to obtain ecological briquettes for household use, whose combustion does not generate smoke and unpleasant odor, with the following characteristics: 36.4% ash content, 27.2% volatile matter, and 4.390 Kca/g calorific energy [51]. In a study [52], a mixture of bagasse with kraft lignin was briquetted at a temperature of 140 °C and a pressure of 17 MPa for 8 min. It was shown that the addition of kraft lignin improved the characteristics of the briquettes, such as resistance and durability. These characteristics are especially important during the storage and transport of operations because briquettes with low durability crumble easily, generating dust that affects human health; additionally, they can self-ignite if they are stored at high temperatures or they can absorb moisture, which will decrease their calorific value.

In the construction materials industry, bagasse is used as a substitute for sand [48], and additive in the manufacturing of bricks [53], cement [41][54][55], mortar, and concrete [56][57][58]. Cement-based materials in which bagasse ash have been incorporated have superior mechanical performance [59]. In addition, this type of ash utilization can help reduce greenhouse gases produced in cement factories, as it is known that the cement industry contributes 8% to the total CO₂ emissions from anthropogenic sources [60]. In addition, utilization of bagasse ash in the cement industry decreases the costs of construction materials, alleviates the pressure of the final disposal of waste (storage costs are increasing), and prevents soil and air pollution.

2.5. Vinasse from Ethanol Distillation

2.5.1. Characterization of Sugarcane Vinasse

From the ethanol distillation stage, vinasse results as waste, i.e., the fermented liquid medium without ethanol content, considered to be a severe environmental pollutant. Vinasse represents a flow of acidic wastewater (with pH = 3.5–5), dark brown in color, with an unpleasant odor [61], a high chemical oxygen demand (COD), and high salt content [62]; it also contains suspended organic solids, minerals, yeast, sugarcane proteins, and phenolic structures [63]; it has high concentrations of nutrients (nitrogen, phosphorus, potassium) [64][65], heavy metals (zinc, copper, barium, and chromium) [66], residual sugar, and some volatile compounds.

For each liter of ethanol produced from sugarcane, between 10–15 L of vinasse are generated [66]. It is estimated that by 2024 the production of vinasse will reach 1742 billion liters [62].

2.5.2. Valorization of Sugarcane Vinasse

Due to its large generation volumes and still limited fields of application, vinasse is successfully treated mainly by anaerobic digestion [64][67][68]. Anaerobic digestion of vinasse contributes to the reduction of pollution because its polluting load with organic compounds is considerably reduced by biological treatment, and the obtained biogas is a renewable biofuel. Due to the high concentration of sulfides in the vinasse, the biogas obtained will also have high concentrations of hydrogen sulfide, a highly corrosive gas that, if not removed quickly, will attack the pipes of the installations. Technologies for obtaining third-generation biodiesel and hydrogen from vinasse are currently in the development stage [69].

Because of the low concentration of fermentable carbon in vinasse, it can be mixed with carbohydrate sources (such as molasses) to allow the production of larger amounts of hydrogen.

The vinasse can also be temporarily stored in lagoons where treatment by oxidation takes place under natural conditions, to be later applied as liquid organo-mineral fertilizer [65][70][71], by sprinkling systems, on the sugarcane fields in the vicinity of the ethanol distilleries, thus contributing to higher agricultural productions. The phosphorus content of vinasse can fully cover the requirements of agricultural crops. Like any other type of fertilizer, it must be mentioned that the application of vinasse must be done at the times and rates required by the characteristics of the crop and the soil. If applied in excess, it will lead to reduced productivity and late maturation of the sugarcane crops, which will have a low sucrose content; additionally, excess vinasse causes environmental problems such as soil pollution with heavy metals, soil acidification and salinization, processes that disturb the soil biota, and salt leaching to groundwater.

On a laboratory scale, due to its high content of micronutrients, vinasse was used as a growth medium for filamentous fungus *Neurospora intermedia*, and as a substrate for obtaining unicellular products (proteins, lipids, enzymes, organic acids, alcohols). The obtained biomass contained 45% protein and important essential amino acids [72].

2.6. Press Mud (Cake)

2.6.1. Characterization of Sugarcane Press Mud

Press mud (cake) is the dark, spongy solid residue left after the juice extracted from sugarcane has been clarified and filtered. Processing one ton of cane yields 0.03 tons of press mud [73], which is rich in fiber, crude protein, crude wax, sugar, fat, and ash. Therefore, press mud has a complex composition: 15–30% fibers, 5–15% crude proteins, 5–15% sugars, 5–14% crude wax, 9–10% total ash, 4–10% SiO₂, 1–4% CaO, 1–3% PO₄, and 0.5–1.5% MgO [74].

Press mud is an insoluble material, whose decomposition in natural conditions takes a long time, generates an acid leachate [75], emits unpleasant odors that attract insects and other pests, but also intense heat [76] and poses risks of self-ignition [75] when exposed to direct sunlight.

2.6.2. Valorization of Sugarcane Press Mud

Being a waste rich in nitrogen, phosphorus, calcium, and organic matter [77], press sludge can be used as soil fertilizer [78][79]. Its usefulness in reducing soil degradation through crusting, cracking, erosion, and compaction has been demonstrated [19].

Press sludge can be composted as such [80] or mixed with wastewater or residual vinasse from ethanol distillation [81], with animal manure and bagasse [16], or with other types of vegetable waste [82]. It can also be vermicomposted [32], in the presence of earthworm species such as *Eisenia fetida* or *Eudrillus eugeniae*. A drawback of composting is that it is a slow process that requires large spaces and infrastructure for turning, aeration, and watering the furrows or piles of organic matter. On the other hand, excessive application of press sludge to the field for long periods will result in soil contamination, due to accumulation of heavy metals (zinc, copper, lead) [14][83], and in negative effects on plant growth [84].

Other domains in which press sludge is used include aquaculture [85]; biosorbent for some metal ions and dyes from liquid solutions [86]; the production of hydrocarbons and chemicals [87]; the production of cement, paints, and foaming agents [73]; the production of biofuels, such as ethanol, biobutanol, and biogas [14] and of biofuel briquettes obtained from cane straws, bagasse, bagasse ash, and press sludge [88].

2.7. Wastewater from Sugarcane Processing

2.7.1. Characterization of Wastewater from Sugarcane Processing

Wastewater represents the most common waste of the food industry, and in most of the unitary operations of food product technologies taking place in an aqueous environment or requiring significant amounts of fresh water.

The sugar industry is one of the main users of fresh water at all stages of the technological stream, and consequently among the largest generators of wastewater.

In sugarcane factories (mills), wastewater is mainly generated from the washing operations of floors and equipment on the process stream, in evaporators (condensate water), by cane juice leaks at improperly attached taps of pipelines, from syrup and molasses generation stages, and from dewatering of press mud or of other solid waste [89].

For example, processing one ton of sugar beet requires about 20 m³ of fresh water [90]. As a comparison, crushing a ton of sugarcane typically consumes between 1.5–2 m³ of fresh water and generates an average of 1 m³ of wastewater [81][91]. Some sugarcane processing plants in India produce between 0.2–1.8 m³ of wastewater per ton of sugar produced.

Wastewater from sugarcane factories has the following characteristics: pH between 4–7 units, chemical oxygen demand (COD) between 1800–3200 mg/L, biochemical oxygen demand (BOD₅) between 720–1500 mg/L, solids total at 3500 mg/L, total nitrogen at 1700 mg/L, and total phosphorus at 100 mg/L [92]. According to other studies,

these wastewaters have a COD between 2300–8000 mg/L, BOD₅ between 1700–6600 mg/L, and total suspended solids at 5000 mg/L [93], and high ammonium content, respectively [89].

Wastewater from sugar factories also contains carbohydrates, nutrients, sulfates, chlorides, heavy metals [94], oils and fats from different equipment [95], pesticides, herbicides, and pathogens from contaminated surfaces or materials [96]. These wastewaters have high concentrations of organic and inorganic substances, including gaseous and solid pollutants.

2.7.2. Valorization of Wastewater from Sugarcane Processing

Wastewater from the manufacture of sugar and ethanol from sugarcane, as the vinasse (the liquid residue resulting from the distillation of ethanol) can be used for a variety of purposes.

Due to their content of organic matter and sugars, the wastewater from sugar industry quickly undergoes fermentation. Thus, it can be used in the generation of bioenergy: anaerobic digestion to obtain biogas, bioethanol, and biohydrogen production, etc. Additionally, sugarcane wastewater can be used as a culture medium for algae from which lipids can be extracted to obtain biodiesel [9].

These wastewaters can be used in other fermentation processes to obtain products with added value, such as organic acids (lactic, butyric, acetic) and enzymes (cellulase and laccase) [97].

2.8. Sugarcane Molasses

2.8.1. Characterization of Sugarcane Molasses

Molasses is the most important by-product of the sugar industry and is obtained from sugar crystallization. Molasses is a viscous substance similar to honey and contains 35% sucrose, 20% water, 9% fructose, 7% glucose, 3% reducing sugars, 4% carbohydrates, 4.5% nitrogenous compounds, 5% non-nitrogenous acids, 12% ash, and 5% other substances [98].

According to [99], sugarcane molasses has the following composition (values in g/kg): between 735–875 total solids, 447–587 total sugars, 157–469 sucrose, 97–300 sugars reducing agents, 0.25–1.5 nitrogen, 0.3–0.7 phosphorus, 19–54 potassium, 6–12 calcium, and 4–11 magnesium. It has an acidic pH (5–7 units), mineral and ash content between 8–13%, and its salt content between 2–8% contributes to the buffering capacity, flavor stabilization, and prevention of hydrolysis [100]. Molasses has a chemical oxygen demand of 862.842–935.62 g/L and a biological oxygen demand of 486.35–618.46 g/L [101].

2.8.2. Valorization of Sugarcane Molasses

Sugarcane molasses is usually exploited on industrial scale in the production of: biogas, with the mention that the anaerobic digestion of molasses is limited by high values of its chemical oxygen demand and ion concentration, as

well as melanoidin content [101]; ethanol, with the mention that molasses no longer requires the pretreatment step before fermentation [102]; and bioethanol [103][104][105][106], but also ethyl alcohol, butanol, and acetone [107].

Molasses is also used as a raw material to obtain some food products. It is a major constituent of commercial fine brown sugar but is also used to sweeten and flavor foods [108], as well as in the alcoholic beverage industry such as rum [109], vodka, and sometimes beer [110]. Unlike highly refined sugars, molasses also contains significant amounts of vitamin B6 and minerals, including calcium, magnesium, iron, and manganese, so it is also an important dietary supplement.

Molasses is widely used as a supplement in animal feed, as a soil fertilizer, as a culture medium for the production of microbial transglutaminases [111], as a substrate for fermentation processes (production of acids: citric, lactic, succinic; alcohols; vitamins; monosodium glutamate; fructo-oligosaccharides) [39][112][113], and even as a raw material in cosmetic products (for example, moisturizing hair masks).

References

1. Mohamad, N.; Lakhiar, M.T.; Samad, A.A.A.; Mydin, A.O.; Jhatial, A.A.; Sofia, S.A.; Goh, W.I.; Ali, N. Innovative and sustainable green concrete—A potential review on utilization of agricultural waste. *IOP Conf. Ser. Mater. Sci. Eng.* 2019, 601, 012026.
2. Nunes, L.J.R.; Loureiro, L.M.E.F.; Sá, L.C.R.; Silva, H.F.C. Sugarcane industry waste recovery: A case study using thermochemical conversion technologies to increase sustainability. *Appl. Sci.* 2020, 10, 6481.
3. FAOSTAT Statistical Yearbook, World Food and Agriculture. 2021. Available online: <https://www.fao.org/3/cb4477en/cb4477en.pdf> (accessed on 4 July 2022).
4. OECD-FAO Agricultural Outlook 2020–2029. Available online: <https://www.oecd-ilibrary.org/sites/3736a600-en/index.html?itemId=/content/component/3736a600-en#section-d1e18381> (accessed on 4 July 2022).
5. Faostat 2022. Sugarcane Production in 2020, Crops/Regions/World List/Production Quantity (Pick Lists). UN Food and Agriculture Organization, Corporate Statistical Database. Available online: <https://www.fao.org/faostat/en/#data/QC> (accessed on 4 July 2022).
6. Amini, Z.; Self, R.; Strong, J.; Speight, R.; O'Hara, I.; Harrison, M.D. Valorization of sugarcane biorefinery residues using fungal biocatalysis. *Biomass Convers. Biorefinery* 2021, 12, 997–1011.
7. Kim, M.; Day, D.F. Composition of sugar cane, energy cane, and sweet sorghum suitable for ethanol production at Louisiana sugar mills. *J. Ind. Microbiol. Biotechnol.* 2011, 38, 803–807.

8. Boussarsar, H.; Roge, B.; Mathlouthi, M. Optimization of sugarcane bagasse conversion by hydrothermal treatment for the recovery of xylose. *Bioresour. Technol.* 2009, 100, 6537–6542.
9. Fito, J.; Tefera, N.; Van Hulle, S.W.H. Sugarcane biorefineries wastewater: Bioremediation technologies for environmental sustainability. *Chem. Biol. Technol. Agric.* 2019, 6, 1–13.
10. Ometto, A.R.; Hauschild, M.Z.; Roma, W.N.L. Lifecycle assessment of fuel ethanol from sugarcane in Brazil. *Int J. Life Cycle Assess* 2009, 14, 236–247.
11. Martinelli, L.; Filoso, S.; Aranha, C.D.B.; Ferraz, S.F.B.; Andrade, T.M.B.; Ravagnani, E.D.C. Water use in sugar and ethanol industry in the State of Sao Paulo (Southeast Brazil). *J. Sustain. Bioenergy Syst.* 2013, 3, 135–142.
12. Jugwanth, Y.; Sewsynker-Sukai, Y.; Gueguim Kana, E.B. Valorization of sugarcane bagasse for bioethanol production through simultaneous saccharification and fermentation: Optimization and kinetic studies. *Fuel* 2020, 262, 116552.
13. Smithers, J. Review of sugarcane trash recovery systems for energy cogeneration in South Africa. *Renew. Sustain. Energy Rev.* 2014, 32, 915–925.
14. Meghana, M.; Shastri, Y. Sustainable valorization of sugar industry waste: Status, opportunities, and challenges. *Bioresour. Technol.* 2020, 303, 122929.
15. Pierossi, M.; Bernhardt, H.W.; Funke, T. Sugarcane leaves and tops: Their current use for energy and hurdles to be overcome, particularly in South Africa, for greater utilisation. *Proc. Annu. Congr. S. Afr. Sugar Technol. Assoc.* 2016, 89, 350–360.
16. Balakrishnan, M.; Batra, V.S. Valorization of solid waste in sugar factories with possible applications in India: A review. *J. Environ. Manag.* 2011, 92, 2886–2891.
17. Chandel, A.K.; da Silva, S.S.; Carvalho, W.; Singh, O.V. Sugarcane bagasse and leaves: Foreseeable biomass of biofuel and bio-products. *J. Chem. Technol. Biotechnol.* 2012, 87, 11–20.
18. Gómez, E.O.; Souza, R.T.G.; Rocha, G.J.M.; Almeida, E.; Cortez, L.A.B. A palha de cana-de-açúcar como matéria-prima para processos de segunda geração. In *Bioetanol de Cana de Açúcar*; Cortez, L.A.B., Ed.; Edgard Bleucher: São Paulo, Brazil, 2010; pp. 636–659.
19. Nakhla, D.A.; El Haggag, S. A proposal to environmentally balanced sugarcane industry in Egypt. *Int. J. Agric. Policy Res.* 2014, 2, 321–328.
20. Singh, P.; Suman, A.; Tiwari, P.; Arya, N.; Gaur, A.; Shrivastava, A.K. Biological pretreatment of sugarcane trash for its conversion to fermentable sugars. *World J. Microbiol. Biotechnol.* 2008, 24, 667–673.
21. Mahimairaja, S.; Dooraisamy, P.; Lakshmanan, A.; Rajannan, G.; Udayasoorian, C.; Natarajan, S. *Composting Technology and Organic Waste Utilization in Agriculture*; A.E. Publications: Coimbatore, India, 2008.

22. Nunes, L.; Matias, J.; Catalão, J. A review on torrefied biomass pellets as a sustainable alternative to coal in power generation. *Renew. Sustain. Energy Rev.* 2014, 40, 153–160.
23. Clauser, N.M.; Gutiérrez, S.; Area, M.C.; Felissia, F.E.; Vallejos, M.E. Small-sized biorefineries as strategy to add value to sugarcane bagasse. *Chem. Eng. Res. Des.* 2016, 107, 137–146.
24. Rabelo, S.C.; Carrere, H.; Maciel Filho, R.; Costa, A.C. Production of bioethanol, methane and heat from sugarcane bagasse in a biorefinery concept. *Bioresour. Technol.* 2011, 102, 7887–7895.
25. Costa, S.M.; Aguiar, A.; Luz, S.M.; Pessoa, A.; Costa, S.A. Sugarcane straw and its cellulosic fraction as raw materials for obtainment of textile fibers and other bioproducts. *Polysaccharides* 2014, 513–533.
26. Monteiro, S.N.; Candido, V.S.; Braga, F.O.; Bolzan, L.T.; Weber, R.P.; Drelich, J.W. Sugarcane bagasse waste in composites for multilayered armor. *Eur. Polym. J.* 2016, 78, 173–185.
27. Shafiq, N.; Hussein, A.A.E.; Nuruddin, M.F.; Al Mattarneh, H. Effects of sugarcane bagasse ash on the properties of concrete. *Proc. Inst. Civ. Eng.* 2018, 171, 123–132.
28. Khoo, R.Z.; Chow, W.S.; Ismail, H. Sugarcane bagasse fiber and its cellulose nanocrystals for polymer reinforcement and heavy metal adsorbent: A review. *Cellulose* 2018, 25, 4303–4330.
29. Sahu, O. Assessment of sugarcane industry: Suitability for production, consumption, and utilization. *Ann. Agrar. Sci.* 2018, 16, 389–395.
30. Alves-Rezende, C.; de Lima, M.A.; Maziero, P.; Ribeiro de Azevedo, E.; Garcia, W.; Polikarpov, I. Chemical and morphological characterization of sugarcane bagasse submitted to a delignification process for enhanced enzymatic digestibility. *Biotechnol. Biofuels* 2011, 4, 54–72.
31. Monteiro, S.N.; Lopes, F.P.D.; Barbosa, A.P.; Bevitori, A.B.; Silva, I.L.A.; Costa, L.L. Natural lignocellulosic fibers as engineering materials—An overview. *Metall. Mater. Trans. A* 2011, 42, 2963–2974.
32. Bhat, S.A.; Singh, J.; Vig, A.P. Management of sugar industrial wastes through vermitechnology. *Int. Lett. Nat. Sci.* 2016, 55, 35–43.
33. Sarker, T.C.; Azam, S.M.G.G.; Bonanomi, G. Recent advances in sugarcane industry solid by-products valorization. *Waste Biomass Valorization* 2017, 8, 241–266.
34. Munagala, M.; Shastri, Y.; Nalawade, K.; Konde, K.; Patil, S. Life cycle and economic assessment of sugarcane bagasse valorization to lactic acid. *Waste Manag.* 2021, 126, 52–64.
35. Martinez-Hernandez, E.; Amezcua-Allieri, M.A.; Sadhukhan, J.; Aburto, J. Sugarcane bagasse valorization strategies for bioethanol and energy production. In *Sugarcane*; de Oliveira, A.B., Ed.; IntechOpen: London, UK, 2018; Chapter 4.

36. Chandel, A.K.; Antunes, F.A.; Terán-Hilares, R.; Cota, J.; Ellilä, S.; Silveira, M.H.; dos Santos, J.C.; da Silva, S.S. Bioconversion of hemicellulose into ethanol and value-added products: Commercialization, trends, and future opportunities. In *Advances in Sugarcane Biorefinery. Technologies, Commercialization, Policy Issues and Paradigm Shift for Bioethanol and By-Products*; Elsevier B.V.: Amsterdam, The Netherlands, 2018; pp. 97–134.
37. Cardona, C.A.; Quintero, J.A.; Paz, I.C. Production of bioethanol from sugarcane bagasse: Status and perspectives. *Bioresour. Technol.* 2010, 101, 4754–4766.
38. Contreras-Lisperguer, R.; Batuecas, E.; Mayo, C.; Díaz, R.; Pérez, F.J.; Springer, C. Sustainability assessment of electricity cogeneration from sugarcane bagasse in Jamaica. *J. Clean. Prod.* 2018, 200, 390–401.
39. Iryani, D.; Hirajima, T.; Kumagai, S.; Nonaka, M.; Sasaki, K. Overview of Indonesian sugarcane industry and utilization of its solid waste. In *Proceedings of the Annual Fall Meeting of the Mining and Materials Processing Institute of Japan (MMIJ)*, Akita, Japan, 14–16 October 2012.
40. Hofsetz, K.; Silva, M.A. Brazilian sugarcane bagasse: Energy and non-energy consumption. *Biomass Bioenergy* 2012, 46, 564–573.
41. Arif, E.; Clark, M.W.; Lake, N. Sugar cane bagasse ash from a high efficiency co-generation boiler: Applications in cement and mortar production. *Constr. Build. Mater.* 2016, 128, 287–297.
42. Alves, M.; Ponce, G.H.; Silva, M.A.; Ensinas, A.V. Surplus electricity production in sugarcane mills using residual bagasse and straw as fuel. *Energy* 2015, 91, 751–757.
43. Carriel Schmitt, C.; Moreira, R.; Cruz Neves, R.; Richter, D.; Funke, A.; Raffelt, K.; Grunwaldt, J.D.; Dahmen, N. From agriculture residue to upgraded product: The thermochemical conversion of sugarcane bagasse for fuel and chemical products. *Fuel Process. Technol.* 2020, 197, 106199.
44. Quereshi, S.; Naiya, T.K.; Mandal, A.; Dutta, S. Residual sugarcane bagasse conversion in India: Current status, technologies, and policies. In *Biomass Conversion and Biorefinery*; Springer Professional: Hong Kong, China, 2020.
45. Turdera, M.V. Energy balance, forecasting of bioelectricity generation and greenhouse gas emission balance in the ethanol production at sugarcane mills in the state of Mato Grosso do Sul. *Renew. Sustain. Energy Rev.* 2013, 19, 582–588.
46. Ravindranath, N.H.; Balachandra, P.; Dasappa, S.; Usha, R.K. Bioenergy technologies for carbon abatement. *Biomass Bioenergy* 2006, 30, 826–837.
47. Texteira, S.R.; Pena, A.F.V.; Miguel, A.G. Briquetting of charcoal from sugarcane bagasse fly ash (SCBFA) as an alternative fuel. *Waste Manag.* 2010, 30, 804–807.
48. Sales, A.; Lima, S.A. Use of Brazilian sugarcane bagasse ash in concrete as sand replacement. *Waste Manag.* 2010, 30, 1114–1122.

49. Iyer, P.V.R.; Rao, T.R.; Grover, P.D. *Biomass Thermo-Chemical Characterization*, 3rd ed.; Indian Institute of Technology: New Delhi, India, 2002.
50. Xu, Q.; Ji, T.; Gao, S.-J.; Yang, Z.; Wu, N. Characteristics and applications of sugar cane bagasse ash waste in cementitious materials. *Materials* 2018, 12, 39.
51. Onchieku, J.; Chikamai, B.; Rao, M. Optimum parameters for the formulation of charcoal briquettes using bagasse and clay as binder. *Eur. J. Sustain. Dev.* 2012, 1, 477.
52. Setter, C.; Sanchez Costa, K.L.; Pires de Oliveira, T.J.; Farinassi Mendes, R. The effects of kraft lignin on the physicochemical quality of briquettes produced with sugarcane bagasse and on the characteristics of the bio-oil obtained via slow pyrolysis. *Fuel Process. Technol.* 2020, 210, 106561.
53. Kazmi, S.M.S.; Abbas, S.; Saleem, M.A.; Munir, M.J.; Khitab, A. Manufacturing of sustainable clay bricks: Utilization of waste sugarcane bagasse and rice husk ashes. *Constr. Build. Mater.* 2016, 120, 29–41.
54. Abdulkadir, T.; Oyejobi, D.; Lawal, A. Evaluation of sugarcane bagasse ash as a replacement for cement in concrete works. *Acta Tech. Corviniensis-Bull. Eng.* 2014, 3, 71–76.
55. de Siqueira, A.A.; Cordeiro, G.C. Sustainable cements containing sugarcane bagasse ash and limestone: Effects on compressive strength and acid attack of mortar. *Sustainability* 2022, 14, 5683.
56. Faria, K.C.P.; Gurgel, R.F.; Holanda, J.N.F. Recycling of sugarcane bagasse ash waste in the production of clay bricks. *J. Environ. Manag.* 2012, 101, 7–12.
57. Anjos, M.A.S.; Araújo, T.R.; Ferreira, R.L.S.; Farias, E.C.; Martinelli, A.E. Properties of self-leveling mortars incorporating a high-volume of sugar cane bagasse ash as partial Portland cement replacement. *J. Build. Eng.* 2020, 32, 101694.
58. Kulkarni, P.; Ravekar, V.; Rao, P.R.; Waigokar, S.; Hingankar, S. Recycling of waste HDPE and PP plastic in preparation of plastic brick and its mechanical properties. *Clean Mat.* 2022, 4, 100113.
59. Tripathy, A.; Acharya, P.K. Characterization of bagasse ash and its sustainable use in concrete as a supplementary binder—A review. *Constr. Build. Mater.* 2022, 322, 126391.
60. Andrew, R.M. Global CO₂ emissions from cement production. *Earth Syst. Sci. Data* 2018, 10, 195–217.
61. Kusumaningtyas, R.D.; Hartanto, D.; Rohman, H.A.; Mitamaytawati; Qudus, N.; Daniyanto. Valorization of sugarcane-based bioethanol industry waste (vinasse) to organic fertilizer. In *Valorisation of Agro-industrial Residues—Volume II: Non-Biological Approaches*; Zakaria, Z.,

- Aguilar, C., Kusumaningtyas, R., Binod, P., Eds.; *Applied Environmental Science and Engineering for a Sustainable Future*; Springer: Cham, Switzerland, 2020.
62. Hoarau, J.; Caro, Y.; Grondin, I.; Petit, T. Sugarcane vinasse processing: Toward a status shift from waste to valuable resources: A review. *J. Water Process. Eng.* 2018, 24, 11–25.
63. Reis, C.E.R.; Bento, H.B.S.; Alves, T.M.; Carvalho, A.K.F.; De Castro, H.F. Vinasse treatment within the sugarcane-ethanol industry using ozone combined with anaerobic and aerobic microbial processes. *Environments* 2019, 6, 5.
64. Moraes, B.S.; Zaiat, M.; Bonomi, A. Anaerobic digestion of vinasse from sugarcane ethanol production in Brazil: Challenges and perspectives. *Renew. Sustain. Energy Rev.* 2015, 44, 888–903.
65. Carpanez, T.G.; Moreira, V.R.; Assis, I.R.; Amaral, M.C.S. Sugarcane vinasse as organo-mineral fertilizers feedstock: Opportunities and environmental risks. *Sci. Total Environ.* 2022, 832, 154998.
66. Christofolletti, C.A.; Escher, J.P.; Correia, J.E.; Marinho, J.F.U.; Fontanetti, C.S. Sugarcane vinasse: Environmental implications of its use. *Waste Manag.* 2013, 33, 2752–2761.
67. Moreira, L.C.; Borges, P.O.; Cavalcante, R.M.; Young, A.F. Simulation and economic evaluation of process alternatives for biogas production and purification from sugarcane vinasse. *Renew. Sustain. Energy Rev.* 2022, 163, 112532.
68. Kiani, M.K.D.; Parsaee, M.; Ardebili, S.M.S.; Pereda Reyes, I.; Fuess, L.T.; Karimi, K. Different bioreactor configurations for biogas production from sugarcane vinasse: A comprehensive review. *Biomass Biorenergy* 2022, 161, 106446.
69. Ramos, L.R.; Lovato, G.; Domingues Rodrigues, J.A.; Silva, E.L. Scale-up and energy estimations of single- and two-stage vinasse anaerobic digestion systems for hydrogen and methane production. *J. Clean. Prod.* 2022, 349, 131459.
70. Tano, F.; Valenti, L.; Failla, O.; Beltrame, E. Effects of distillery vinasses on vineyard yield and quality in the D.O.C. “Oltrepo Pavese Pinot Nero”—Lombardy, Italy. *Water Sci. Technol.* 2005, 151, 199–204.
71. Santos, F.; Eichler, P.; Machado, G.; De Mattia, J.; De Souza, G. By-products of the sugarcane industry. In *Sugarcane Biorefinery, Technology and Perspectives*; Santos, F., Rabelo, S., De Matos, M., Eichler, P., Eds.; Academic Press: Cambridge, MA, USA, 2019; pp. 21–48.
72. Hashemi, S.S.; Karimi, K.; Taherzadeh, M.J. Valorization of vinasse and whey to protein and biogas through an environmental fungi-based biorefinery. *J. Environ. Manag.* 2022, 303, 114138.
73. Yadav, R.L.; Solomon, S. Potential of developing sugarcane by-product based industries in India. *Sugar Tech.* 2006, 8, 104–111.

74. Partha, N.; Sivasubramanian, V. Recovery of chemicals from press mud—A sugar industry waste. *Indian Chem. Eng.* 2006, 48, 160–163.
75. Ochoa-George, P.A.; Eras, J.J.; Gutierrez, A.S.; Hens, L.; Vandecasteele, C. Residue from sugarcane juice filtration (filter cake): Energy use at the sugar factory. *Waste Biomass Valor.* 2010, 1, 407–413.
76. Sen, B.; Chandra, T.S. Chemolytic and solid-state spectroscopic evaluation of organic matter transformation during vermicomposting of sugar industry wastes. *Bioresour. Technol.* 2007, 98, 1680–1683.
77. Casas, L.; Hernández, Y.; Mantell, C.; Casdelo, N.; Ossa, E.M. Filter cake oil-wax as raw material for the production of biodiesel: Analysis of the extraction process and the transesterification reaction. *J. Chem.* 2015, 2015, 946462.
78. Jamil, M.; Qasim, M.; Zia, M.S. Utilization of press mud as organic amendment to improve physico-chemical characteristics of calcareous soil under two legume crops. *J. Chem. Soc. Pak.* 2008, 30, 577–583.
79. Fantaye, A.; Fanta, A.; Melesse, A.M. Effect of filter press mud application on nutrient availability in aquert and fluvent soils of Wonji/Shoa sugarcane plantation of Ethiopia. In *Landscape Dynamics, Soils and Hydrological Processes in Varied Climates*; Melesse, A., Abteu, W., Eds.; Springer Geography: Berlin/Heidelberg, Germany, 2016; pp. 549–563.
80. Rakkiyappan, P.; Thangavelu, S.; Malathi, R.; Radhamani, R. Effect of biocompost and enriched pressmud on sugarcane yield and quality. *Sugar Tech.* 2001, 3, 92–96.
81. Sarangi, B.K.; Mudliar, S.N.; Bhatt, P.; Kalve, S.; Chakrabarti, T.; Pandey, R.A. Compost from sugar mill press mud and distillery spent wash for sustainable agriculture. *Dyn. Soil Dyn. Plant* 2009, 2, 35–49.
82. Nenciu, F.; Stanciulescu, I.; Vlad, H.; Gabur, A.; Turcu, O.L.; Apostol, T.; Vlăduț, V.N.; Cocârță, D.; Stan, C. Decentralized processing performance of fruit and vegetable waste discarded from retail, using an automated thermophilic composting technology. *Sustainability* 2022, 14, 2835.
83. Kumar, V.; Chopra, A.K. Fertigation with agro-residue based paper mill effluent on a high yield spinach variety. *Int. J. Veg. Sci.* 2015, 21, 69–97.
84. Sarwar, G.; Schmeisky, H.; Hussain, N.; Muhammad, S.; Ibrahim, M.; Safdar, E. Improvement of soil physical and chemical properties with compost application in rice-wheat cropping system. *Pak. J. Bot.* 2008, 40, 275–282.
85. Keshavanath, P.; Shivanna Gangadhara, B. Evaluation of sugarcane by-product press mud as a manure in carp culture. *Bioresour. Technol.* 2006, 97, 628–634.

86. Gupta, N.; Tripathi, S.; Balomajumder, C. Characterization of press mud: A sugar industry waste. *Fuel* 2011, 90, 389–394.
87. Ansari, K.B.; Gaikar, V.G. Pressmud as an alternate resource for hydrocarbons of green engineering. *Environ. Sci. Technol.* 2014, 37, 94–101.
88. El Haggag, S.; El Gowini, M.M.; Nemerow, N.L.; Veziroglu, T.N. Environmentally balanced industrial complex for the cane sugar industry in Egypt. In *Proceedings of the International Hydrogen Energy Congress and Exhibition IHEC, Istanbul, Turkey, 13–15 July 2005*.
89. Asaithambi, P.; Matheswaran, M. Electrochemical treatment of simulated sugar industrial effluent: Optimization and modeling using a response surface methodology. *Arab. J. Chem.* 2016, 9, S981–S987.
90. Zver, L.Ž.; Glavič, P. Water minimization in process industries: Case study in beet sugar plant. *Resour Conserv Recycl.* 2005, 43, 133–145.
91. Prakash, S. Sugar mill effluent induced histological changes in intestine of *Channa punctatus*. *Ind. J. Biol. Stud. Res.* 2011, 1, 32–35.
92. Doble, M.; Kruthiventi, A.K. Industrial examples. In *Green Chemistry and Engineering*; Academic Press: Cambridge, MA, USA, 2007; Chapter 9; pp. 245–296.
93. Guven, G.; Perendeci, A.; Tanylac, A. Electrochemical treatment of simulated beet sugar factory wastewater. *Chem. Eng. J.* 2009, 151, 149–159.
94. Baraniya, C.; Jodhi, C. Performance evaluation of effluent treatment plant for sugar mill effluent. *Int. J. Creat. Res. Thoughts IJCRT* 2018, 6, 1492–1499.
95. Memon, A.R.; Soomro, S.A.; Ansari, A.K. Sugar industry effluent—Characteristics and chemical analysis. *J. App. Em. Sc.* 2006, 1, 152–157.
96. Sahu, O.P.; Chaudhari, P.K. Electrochemical treatment of sugar industry wastewater: COD and color removal. *J. Electroanal. Chem.* 2015, 739, 122–129.
97. Lappa, K.; Kandylis, P.; Bekatorou, A.; Bastas, N.; Klaoudatos, S.; Athanasopoulos, N.; Kanellaki, M.; Koutinas, A.A. Continuous acidogenesis of sucrose, raffinose and vinasse using mineral kissiris as promoter. *Bioresour. Technol.* 2015, 188, 43–48.
98. Teclu, D.; Tivchev, G.; Laing, M.; Wallis, M. Determination of the elemental composition of molasses and its suitability as carbon source for growth of sulphate-reducing bacteria. *J. Hazard. Mater.* 2009, 161, 1157–1165.
99. Amorim, H.V.; Baso, L.C.; Lopes, M.L. Sugar cane juice and molasses, beet molasses and sweet sorghum: Composition and usage. In *Alcohol Textbook*; Nottingham University Press: Trumpton Nottingham, UK, 2003; pp. 39–46.

100. Clarke, M.A. Syrups. In *Encyclopedia of Food Sciences and Nutrition*, 2nd ed.; Luiz, T., Paul, F., Eds.; Elsevier Science: Amsterdam, The Netherlands, 2003.
101. Khan, S.; Lu, F.; Kashif, M.; Shen, P. Multiple effects of different nickel concentrations on the stability of anaerobic digestion of molasses. *Sustainability* 2021, 13, 4971.
102. Raharja, R.; Murdiyatmo, U.; Sutrisno, A.; Wardani, A.K. Bioethanol production from sugarcane molasses by instant dry yeast. *IOP Conf. Ser. Earth Environ. Sci.* 2019, 230, 012076.
103. Basso, L.C.; Basso, T.O.; Rocha, S.N. Ethanol production in Brazil: The industrial process and its impact on yeast fermentation. *Biofuel Prod. Recent Dev. Prospect.* 2011, 1530, 85–100.
104. Kartini, A.M.; Dhokhikah, Y. Bioethanol production from sugarcane molasses with simultaneous saccharification and fermentation (SSF) Method using *Saccaromyces cerevisiae*-*Pichia stipitis* consortium. *IOP Conf. Ser. Earth Environ. Sci.* 2018, 207, 012061.
105. Jayanti, A.N.; Sutrisno, A.; Wardani, A.K.; Murdiyatmo, U. Bioethanol production from sugarcane molasses by instant dry yeast (effect of pretreatment and fermentation temperature). *IOP Conf. Ser. Earth Environ. Sci.* 2019, 230, 012102.
106. Parascanu, M.M.; Sanchez, N.; Sandoval-Salas, F.; Mendez Carreto, C.; Soreanu, G.; Sanchez-Silva, L. Environmental and economic analysis of bioethanol production from sugarcane molasses and agave juice. *Environ. Sci Pollut. Res.* 2021, 28, 64374–64393.
107. Afschar, A.S.; Vaz Rossell, C.E.; Schaller, K. Bacterial conversion of molasses to acetone and butanol. *Appl. Microbiol. Biotechnol.* 1990, 34, 168–171.
108. Nikodinovic-Runic, J.; Guzik, M.; Kenny, S.T.; Babu, R.; Werker, A.; O'Connor, K.E. Carbon-rich wastes as feedstocks for biodegradable polymer (polyhydroxyalkanoate) production using bacteria. *Adv. Appl. Microbiol.* 2013, 84, 139–200.
109. Nicol, D.A. Rum. In *Fermented Beverage Production*; Lea, A.G.H., Piggott, J.R., Eds.; Springer: Boston, MA, USA, 2003; pp. 263–287.
110. Gandiglio, M.; Lanzini, A. Biogas resource potential and technical exploitation. In *Comprehensive Renewable Energy*, 2nd ed.; Sayigh, A., Ed.; Elsevier B.V.: Amsterdam, The Netherlands, 2022.
111. Portilla, O.M.; Espinosa, V.; Jarquin, L.; Salinas, A.; Velazquez, G.; Vazquez, M. Sugar cane molasses as culture media component for microbial transglutaminase production. *Indian J. Biotechnol.* 2017, 16, 419–425.
112. Oliveira Lino, F.S.; Basso, T.O.; Sommer, M.O.A. A synthetic medium to simulate sugarcane molasses. *Biotechnol. Biofuels* 2018, 11, 221.
113. Vignesh Kumar, B.; Muthumari, B.; Kavitha, M.; John Praveen Kumar, J.K.; Thavamurugan, S.; Arun, A.; Jothi Basu, M. Studies on optimization of sustainable lactic acid production by *Bacillus*

amyloliquefaciens from sugarcane molasses through microbial fermentation. Sustainability 2022, 14, 7400.

Retrieved from <https://encyclopedia.pub/entry/history/show/66256>