

Polyoxymethylene

Subjects: [Dentistry, Oral Surgery & Medicine](#)

Contributor: Oliver Schierz

Polyoxymethylene (POM) is a material able to provide tooth-colored esthetics and that is suitable for fabrication of frameworks for removable dental prostheses. POM can be characterized as both polyethers (-C-O-) as well as polyacetals (-O-C-O-).

tooth wear

bruxism

dental restoration wear

resin

synthetic

implant-supported removable partial dentures

1. Introduction

Polyoxymethylene (POM) is a material able to provide tooth-colored esthetics and that is suitable for fabrication of frameworks for removable dental prostheses (RDPs). POM can be characterized as both polyethers (-C-O-) as well as polyacetals (-O-C-O-) [1]. Two formulations of POM are available: the polyoxymethylen homopolymer (POM-H) and copolymer (POM-C). POM-H can be fabricated either from formaldehyde monomers or from trioxane monomers [1]. POM-H is a highly crystalline thermoplastic material with a helical structure [1][2]. For the formulation of POM-C, small amounts of other cyclic ethers (-C-O-) featuring additional methylene groups are added (Figure 1) [3][4]. The additional methylene groups result in higher thermal and hydrolytic stability, which improves its resistancy against polymer chain degradation [5].

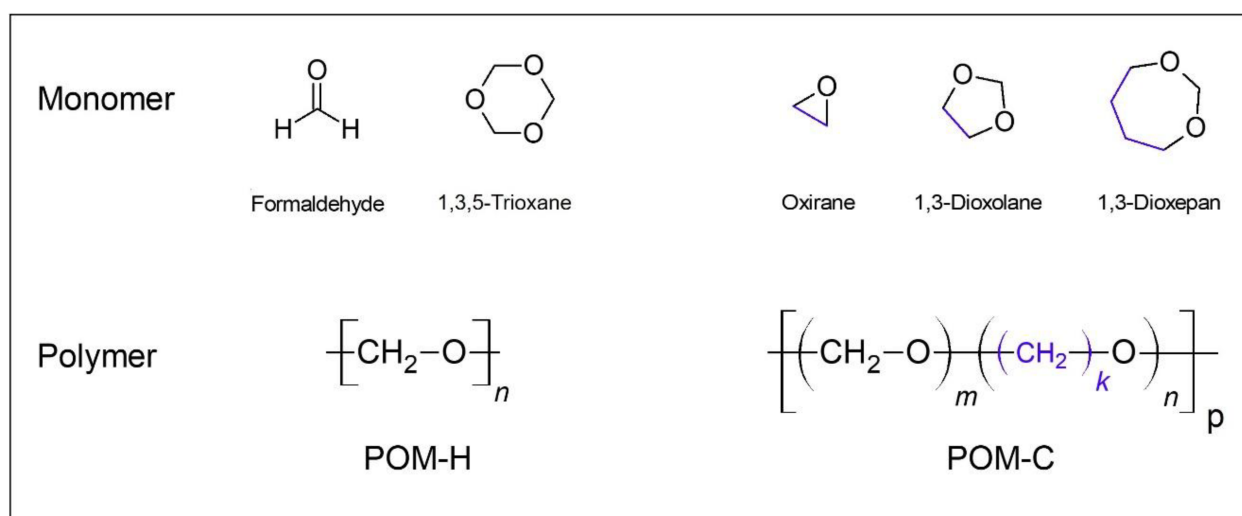


Figure 1. Structural formulas of POM-H, POM-C, and corresponding monomers, additional methylene groups (blue).

2. Application

Due to its excellent properties, POM is industrially used as a constructional material, e.g., for the manufacturing of gear wheels, housing parts, and bearings [2][5]. The favorable mechanical properties include high strength, stiffness, hardness, impact strength, low coefficient of friction, high wear resistance, and dimensional stability [2][5][6]. In addition, POM is featured by high chemical resistance, low water absorption, and high biocompatibility [7][8]. The melting point of POM ranges around 175 °C. For thermoplastic manufacturing techniques, injection moulding is the most frequently employed process [8]. By using subtractive manufacturing, artefacts due to smearing can arise due to excessive cutting temperature levels [9]. Additive manufacturing methods such as powder bed fusion have rarely been investigated [6]. Recent literature revealed that POM can also be processed via selective laser sintering [7]. Regarding the optical appearance, POM is characterized by even surfaces and an intrinsic whiteness. The latter is based on its crystallinity [6][7]; however, POM can also be colored [10]. All in all, favorable properties of POM are advantageous for medical application [3][7] and the CAD/CAM-techniques pave the way for application in dentistry (overview see Table 1).

Table 1. Advantages and Disadvantages of polyoxymethylene as material for removable dentures.

Advantages	Disadvantages
Tooth-colored, available in different shades	Opaque
Break-proof due to high impact strength	Flexible
Smooth surface	Low chemical interaction with other materials
Non known allergies	Limited wear resistance
Color stability	
Customizable color	

References

1. Uchida, T.; Tadokoro, H. Structural studies of polyethers. IV. Structure analysis of the polyoxymethylene molecule by three-dimensional fourier syntheses. *J. Polym. Sci. A-2 Polym. Phys.* 1967, 5, 63–81.
2. Samyn, P.; van Driessche, I.; Schoukens, G. Thermal and spectroscopic analysis of worn polyoxymethylene surfaces and wear debris explaining degradation and polymerisation mechanisms. *J. Polym. Res.* 2007, 14, 411–422.

3. Eschbach, L. Nonresorbable polymers in bone surgery. *Injury* 2000, 31, D22–D27.
4. Klein, R.; Schüll, C.; Berger-Nicoletti, E.; Haubs, M.; Kurz, K.; Frey, H. ABA Triblock Copolymers Based on Linear Poly(oxymethylene) and Hyperbranched Poly(glycerol): Combining Polyacetals and Polyethers. *Macromolecules* 2013, 46, 8845–8852.
5. Bergmann, W. *Werkstofftechnik. Mit 4 Tabellen: Grundlagen*, 7th ed.; Carl Hanser: Munich, Germany, 2013.
6. Dechet, M.A.; Baumeister, I.; Schmidt, J. Development of Polyoxymethylene Particles via the Solution-Dissolution Process and Application to the Powder Bed Fusion of Polymers. *Materials* 2020, 13, 1535.
7. Wendel, B.; Rietzel, D.; Kühnlein, F.; Feulner, R.; Hülder, G.; Schmachtenberg, E. Additive Processing of Polymers. *Macromol. Mater. Eng.* 2008, 293, 799–809.
8. Domininghaus, H.; Elsner, P.; Eyerer, P.; Hirth, T. *Kunststoffe. Eigenschaften und Anwendungen*, 8th ed.; Springer: Berlin/Heidelberg, Germany, 2012; ISBN 9783642161728.
9. Rubio, J.C.C.; Panzera, T.H.; Scarpa, F. Machining behaviour of three high-performance engineering plastics. *Proc. Inst. Mech. Eng. Part B J. Eng. Manuf.* 2015, 229, 28–37.
10. Kaiser, W. *Kunststoffchemie für Ingenieure. Von der Synthese bis zur Anwendung*, 5th ed.; Carl Hanser: Munich, Germany, 2021.

Retrieved from <https://encyclopedia.pub/entry/history/show/21870>