

Composting Technology of Brewer's Grains

Subjects: Agriculture, Dairy & Animal Science

Contributor: DAVIDE ASSANDRI, Giacomo Zara, Eugenio Cavallo, Budroni Marilena

The brewing industry is characterized by the large production of by-products. Following the fundamentals of a circular economy, several attempts to recycle brewers' spent grain (BSG) have been investigated. However, little information is available on its use for composting.

Keywords: aerobic stabilization ; agro-industry by-product ; brewing industry ; circular economy ; organic fertilizer ; BSG

1. Introduction

The concept of a circular economy was developed to overcome the traditional linear economic model of "take, make, and dispose" ^[1]. This new business model focuses on sharing, re-use, repair, and recycling, as a closed loop. In a circular economy, two types of materials have been identified: biological and technical. The biological material can be decomposed by microorganisms, while the technical material cannot be reintegrated into the biosphere.

Typically, a large amount of biological material is produced by agro-industry activities. Therefore, recycling agro-industry by-products represents an important challenge for a circular economy. In this context, and as underlined by many studies ^{[2][3][4]}, the waste by-product produced by the food and drink industries should be considered as one of the most serious environmental problems. In the drinks industries, for example, a brewery produces large quantities of by-products that include spent hops, yeast, and spent grain. The last of these is the most significant by-product in the brewing process, of which it represents 85% ^[5].

The latest Barth report on hops ^[6] reported that European beer production in 2018 was 531 million hectoliters, 401 million hectoliters of which was produced by the member countries of the European Union (EU 27). World production has instead been estimated at 1,904 million hectoliters. Considering that, for every 100 L of beer, 20 kg of brewers' spent grain (BSG) are produced ^{[7][8][9]}, this estimates the worldwide annual production of BSG as ~38 to 39 million tons, with 3.4 million tons in the European Union alone ^[10].

Xiros and Christakopoulos (2012) ^[11] summarized the brewing process into the six key stages of malting, milling, mashing, brewing, cooling, and fermentation. As shown in Figure 1, after the mashing process, a filtration step (lautering) follows, from which a sweet liquid (the wort) is obtained. This liquid is rich in fermentable sugars that can be converted into ethanol during fermentation, while the insoluble, undegraded part of the malted barley grain is known as BSG ^[12].

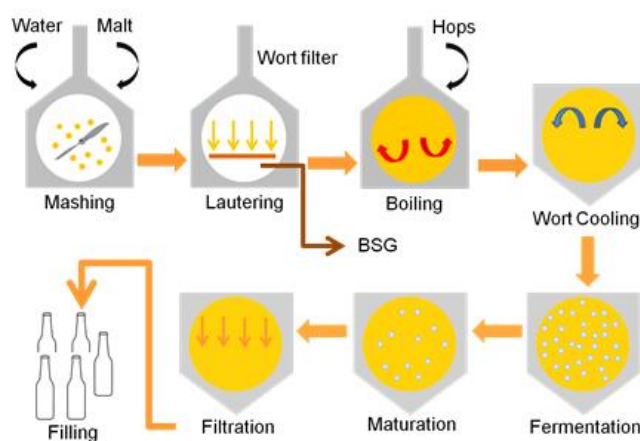


Figure 1. Simplified scheme for brewing. BSG, brewers' spent grain.

The disposal of BSG, spent hops, and yeast represents one of the major concerns for the brewing industry because of: (1) the huge bulk quantities generated; (2) the low market value; (3) the difficulty for their storage due to high moisture contents; and (4) the issues with their disposal as landfill or by burning due to environmental pollution ^[11].

In the last few years, following the fundamentals towards a circular economy, several ways to recycle BSG have been investigated. For example, Aliyu and Bala (2011) [13] reported that BSG has been investigated for animal feed, production of value-added compounds (e.g., xylitol, lactic acid, among others), microorganism cultivation, or simply as a raw material for extraction of compounds such as sugars, proteins, acids, and antioxidants. Mussatto and Roberto (2006) [14] highlighted that BSG can also be used efficiently for enzyme production, as an adsorbent for removing organic materials from effluents, and for immobilization of various substances.

2. The Composting Process

Composting allows biological decomposition of organic matter and can be promoted by microorganisms under controlled conditions. In addition, as highlighted by Pampuro et al. (2016) [15], composting implies volume and weight reductions of the organic waste. This process is aerobic and exothermic, which leads to a stabilized final product (i.e., humus-like), known as compost, which is free of phytotoxicity and pathogens (i.e., viruses, bacteria, fungi, parasites), and is rich in nutrients. Hence, BSG has agricultural value as a fertilizer [16][17].

As shown in Figure 2, microorganisms are involved in this composting (i.e., bacteria, fungi, microarthropods), and they can easily metabolize and mineralize the simple organic carbon compounds, to produce SO_4^{2-} , NH_3 , greenhouse gases, heat, and water vapor.

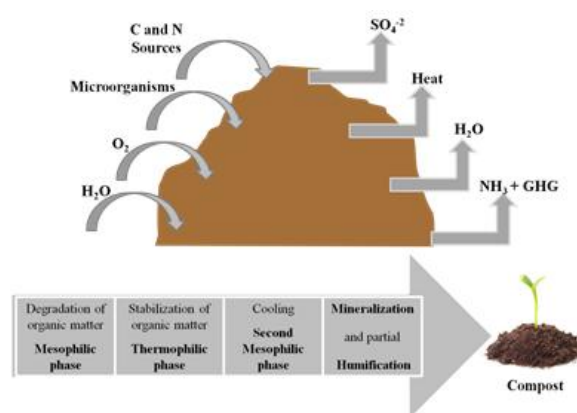


Figure 2. Scheme of the composting process. GHG, greenhouse gases.

In recent years, composting has gained interest as a waste management strategy that has potential economic and environmental benefits, as this process adapts to any by-product that results from agro-industry activities. Compost use for agricultural purpose can help to maintain and improve soil quality and fertility, while reducing erosion and allowing bioremediation of polluted soils [18][19].

2.1. Factors Affecting the Composting Process

Composting is a spontaneous process that occurs naturally. However, efficient composting to obtain a high value-added agricultural product in terms of agronomic properties, and to avoid nuisance problems such as odors and dust, requires the control of several factors. The composting process is typically affected by two main groups of factors: (i) those related to the composition of the initial composting mixture, such as its nutrient balance, pH, and porosity; and (ii) those related to the process management, such as O_2 concentrations and temperatures [20][21].

The nutritional balance of composting mixtures is strongly affected by the C/N ratio. Microorganisms involved in the composting process require both carbon and nitrogen as organic sources for their activities and development. Following the recommendations of De Bertoldi et al. (1983) [22] to optimize the development of the composting process, the C/N ratio should be from 20 to 30. Composting mixtures characterized by an excess of degradable substrate for the microorganisms typically have a C/N ratio >30 , which makes the process very slow. On the other hand, as highlighted by Bernal et al. (2009) [21], composting mixtures characterized by a C/N ratio <20 can result in nitrogen losses, as ammonia volatilization or as leachate from the composting mass. However, low C/N ratios can be corrected by adding a bulking agent (e.g., straw, wood chips, sawdust) to provide degradable organic carbon.

According to Bernal et al. (2009) [21], the optimum pH when composting is from 5.5 to 7.5. This factor has a key role in the control of nitrogen losses through ammonia volatilization. In this context, Azim et al. (2018) [23] highlighted that ammonia losses can be particularly significant at pH >8 .

In terms of porosity, air-filled pore spaces of composting piles should be in the range of 35% to 50%. Porosity >50% prevents the temperature increase inside a composting pile, because energy loss exceeds heat production. Porosity <50% can instead lead to anaerobic conditions and odor generation [21].

For aeration, the optimum O₂ concentration is from 15% to 20% [24]. This parameter presents a significant influence on composting development. Correct aeration controls the temperature, removes the excess moisture, and provides the O₂ required by the biological processes.

The optimum moisture content of compost is from 60% to 65%. Moisture >65% represents an obstacle to the supply of oxygen, and anaerobic conditions can be generated. On the other hand, microbial activity is significantly reduced with moisture <40% [25].

The temperature pattern for compost follows the microbial activity and the composting process. The optimum temperature range for composting is 40 °C to 65 °C. Temperatures >55 °C can kill pathogenic microorganisms such as *Aspergillus fumigatus*, the populations of which drop significantly at >50 °C. Other pathogenic microorganisms, such as *Salmonella* spp. and the nonpathogenic *Escherichia coli*, have been reported to persist during composting of several types of waste [26]. Thus, it has been suggested that 70 °C for 30 min or 65 °C for several hours are required to obtain a well-hygienized end-product. However, if the temperature achieved exceeds the tolerance range of the thermophilic decomposers, the effect is damaging for composting. For this reason, temperature control is required to optimize the composting process. Several strategies have been identified for excess heat removal: control of the size and shape of the composting mass [27]; improved cooling and favorable temperature redistribution by turning operations, which means heat removal through evaporation cooling [28]; and superior temperature control by active removal of heat through temperature feedback-controlled ventilation (Rutgers strategy).

Considering the development of the temperature profile, composting can be divided into three main phases:

- Mesophilic phase (25–40 °C): initially fungi, actinomycetes, and bacteria metabolize energy-rich and easily degradable compounds, such as sugars and proteins, to result in increased temperatures.
- Thermophilic phase (35–65 °C): with increasing temperature the decomposition continues to be rapid up to 62 °C, when the mesophilic flora are completely replaced by the thermophilic flora. These latter include, in particular, heat-tolerant and thermophilic bacteria (e.g., *Bacillus*, *Thermus* spp.) and actinomycetes (e.g., *Thermomonospora* spp., *Thermoactinomyces vulgaris*, *Streptomyces* spp., *Microtetraspora* spp.). Thermophilic fungi have optimal growth temperatures between 35 °C and 55 °C, and at higher temperatures their growth is inhibited. The thermophilic phase is important for elimination of pathogenic microorganisms, which is also due to some actinomycetes, such as *Streptomyces* spp., as known producers of antibiotics (e.g., erythromycin, neomycin, chloramphenicol, streptomycin, tetracycline).
- Cooling phase (or second mesophilic phase): when the activity of the thermophilic microorganisms ceases due to substrate exhaustion, the temperature begins to decrease. Mesophilic bacteria can then re-colonize the substrate, particularly the sporogenic *Bacillus* and *Clostridium* spp. [29]. The second mesophilic phase is characterized by increasing numbers of bacteria and fungi that degrade polymers such as starch and cellulose.

The second, stabilization, phase includes not only the mineralization of more slowly degradable compounds, but also more complex processes, such as humification of ligno-cellulose compounds [30]. In this phase, the quality and maturity of the compost is determined through various chemical parameters, such as pH, ammonia content, and C/N ratio, as well as microbiological and biological aspects, such as plant growth and seed germination.

2.2. Methods for Identification of Microbial Communities in Composting

The study of microbial communities in the raw materials and throughout the composting process is fundamental to monitor and manage the quality of soil improvers that are obtained from the stabilization processes. The methods to determine the diversity of the microbial communities are of two types: (i) those based on the cultivation of microorganisms in specific media, for evaluation of the richness and abundance of the cultivable microbial species; and (ii) culture-independent methods for the study of the microbial communities as a whole, without the need to isolate and identify single species. The latter methods are based on various molecular biology techniques, among which denaturing gradient gel electrophoresis has been widely used for characterization of the structure of bacterial communities, in both soil and water samples [31].

2.3. Dynamics of Microbial Species during Composting

Each raw material contains its own particular microbiota and provides a unique environment for that community [32]. The biological and physicochemical parameters of each material influence the composition and dynamics of the species progression during the composting process. Indeed, pH and total nitrogen of the composting material positively influence the microbial communities, and conversely, total organic carbon content and seed germination indices are negatively correlated [33]. The bacterial community structure within different composting materials are all significantly influenced by the C/N ratio and moisture, with an optimal range for the C/N ratio of 20 to 30. Thus, microbial communities can be effectively regulated by adjusting the relevant environmental parameters [34]. Through cultivable approaches, air-dried BSG has been shown to be contaminated by bacteria (103 CFU/mg), but not by fungi and yeast. However, the presence of thermal resistant mycotoxins, such as ochratoxin A, fumonisins, T-2, and HT-2, suggests that microbiological analysis should be performed for raw and stored BSG to determine the microbial species structure, to assess BSG safety and suitability for composting.

Wang et al. compared the bacterial structure of seven different composts using denaturing gradient gel electrophoresis (DGGE), and they showed that four species were present in all of the compost types, two species in several composts, and four species were specific of a single compost. He et al. (2013) showed that *Arcobacter* spp. and *Marinospirillum* spp. were dominant prior to composting, whereas *Thermotogae* spp. became more strongly represented as the composting process proceeded. *Bacillus* spp. and *Cohnella* spp. were identified at various composting phases, while *Cellulomonas* spp. and *Cytophaga* spp. were present during the aerobic mesophilic phase of cellulose degradation. More than half of the *Bacillus* spp. examined produced extracellular cellulases, which included in particular, mesophilic aerobic and anaerobic forms of *B. subtilis*, *B. polymyxa*, *B. licheniformis*, *B. pumilus*, *B. brevis*, *B. firmus*, *B. circulans*, *B. megaterium* and *B. cereus*; these are known to be cellulose and hemicellulose degraders [35].

Actinomycetes show primary biodegradative activity, as they can secrete a wide range of extracellular enzymes and can metabolize recalcitrant compounds. Thus, composting relies heavily on such prolific actinomycetes activities. As well as the mesophilic *Cellulomonas* spp., thermophilic cellulose degrading *Thermoactinomyces* spp., *Streptomyces* spp., and *Thermomonospora* spp. have been isolated from dry vermicompost at high salt and alkaline pH. Finally, fungal species are also known to have important roles in composting of lignocellulosic materials, such as *Trichoderma harzianum*, *Pleurotus ostreatus*, *Polyporus ostriformis*, and *Phanerochaete chrysosporium*.

3. Characteristic of Brewers' Spent Grain Related to the Composting Process

Many factors contribute to the high variability of BSG, including region of production [66], barley variety, harvest time, hop characteristics [36], malting and mashing conditions, and quality and type of adjuncts added during the brewing process [37][38]. Table 1 reports the main physicochemical characteristics described for BSG with respect to the major factors that affect the composting process.

Source	Total Nitrogen (%)	Total Carbon (%)	C/N Ratio	pH	Moisture (%)
Aboukila et al., 2018 [43]	6.1	43.5	7.1	4.2	75.0
Babatunde et al., 2015 [69]	-	46.4	-	-	-
Bougrier et al., 2018 [70]	4.4 *	-	-	-	75.3
Buffington 2014 [71]	-	49.1	-	-	-
Ferreira et al., 2019 [72]	5.5	48.3	8.8	-	78.8
Khidzir et al., 2010 [66]	3.8 *	35.6	9.5 *	-	72.6
Mainardis et al., 2019 [73]	2.7	46.6	17.6	5.8	77.0
Manolikaki and Diamadopoulos 2020 [74]	4.8	45.0	9.4 *	4.8	-
Mbagwu and Ekwealor 1990 [42]	5.1	-	-	4.4	-
Oliveira et al., 2018 [75]	4.6 *	-	-	6.9	78.1
Ortiz et al., 2019 [32]	3.5	48.7	13.9 *	-	76.0
Panjičko et al., 2017 [31]	5.1	58.0 *	11.4 *	-	76.3
Pérez et al., 2017 [76]	4.4	50.4	11.5 *	-	81.3
Phyllis2 Database [77]	3.7	48.9	13.2 *	-	78.9
Saba et al., 2019 [28]	3.6	37.6 *	10.3	3.8	-
Siva Shangari and Agamuthu 2012 [36]	3.6 *	40.1	11.0	4.4	70.6
Sperandio et al., 2017 [78]	4.2	45.7	10.9 *	-	72.9
Stocks et al., 2002 [79]	2.0	50.9	25.5	-	76.0
Thomas and Rahman 2006 [80]	2.0	53.0	26.5 *	-	73.7
Vitanza et al., 2016 [81]	4.1 *	50.8 *	12.4	-	81.3

*, inferred or calculated; -, value absent and impossible to infer.

Table 1. Physicochemical characterization of brewers' spent grain, expressed on a dry weight basis

The C/N ratio, pH and moisture content of BSG described in the literature range from 7.1 to 26.5, from 3.8 to 6.9, and from 70.6% to 81.3%, respectively (Figure 3). Considering the main parameters that affect the composting process, as shown in Figure 3, the C/N ratio identified for BSG in the literature can be much lower than the best composting target

range (20–30). The optimum pH for aerobic stabilization of compost ranges from 5.5 to 7.5, while the pH reported in the literature for BSG is typically more acidic. Also, the mean moisture content described in the literature for BSG is higher than the moisture recommended for composting, with a range of 60% to 65%.

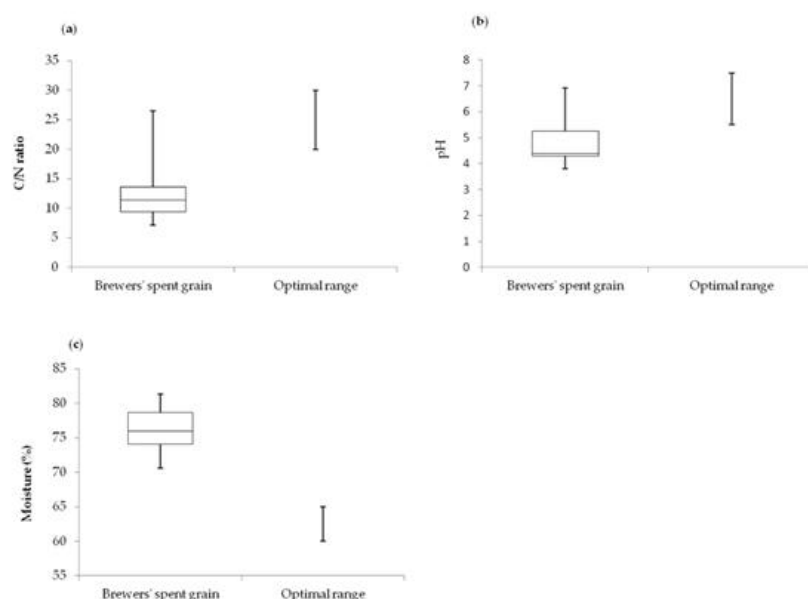


Figure 3. Brewers' spent grain compositions and optimal composting ranges for C/N ratio (a), pH (b), and moisture content (c). Whiskers indicate minimum and maximum levels, and horizontal bar in the box indicates the median.

Due to its chemical characterization, BSG is not suitable for direct composting. The addition of lignocellulosic bulking agents to the BSG, such as wheat straw, woodchips, or sawdust, improves the reduction of the moisture content during the composting process. The addition of these carbon-rich by-products can also enhance the optimization of the substrate properties, such as its C/N ratio, air spaces, and pH, to affect the composting process thus positively. Moreover, the addition of livestock manure is needed for the starting material to promote the composting process.

References

- Ghisellini, P.; Cialani, C.; Ulgiati, S. A review on circular economy: the expected transition to a balanced interplay of environmental and economic systems. *J. Clean. Prod.* 2016, 114, 11–32, doi:10.1016/J.JCLEPRO.2015.09.007.
- Van Dyk, J.; Gama, R.; Morrison, D.; Swart, S.; Pletschke, B. Food processing waste: problems, current management and prospects for utilisation of the lignocellulose component through enzyme synergistic degradation. *Renew. Sustain. Energy Rev.* 2013, 26, 521–531, doi:10.1016/j.rser.2013.06.016.
- Kusch-Brandt, S.; Mumme, J.; Nashalian, O.; Giroto, F.; Lavagnolo, M.C.; Udenigwe, C. *Valorization of Residues From Beverage Production*; Elsevier Inc.: Amsterdam, Netherlands, 2019; ISBN 9780128152591.
- Siqueiros, E.; Lamidi, R.O.; Pathare, P.B.; Wang, Y.; Roskilly, A.P. Energy recovery from brewery waste: Experimental and modelling perspectives. *Energy Procedia* 2019, 161, 24–31, doi:10.1016/j.egypro.2019.02.054.
- Nocente, F.; Taddei, F.; Galassi, E.; Gazza, L. Upcycling of brewers' spent grain by production of dry pasta with higher nutritional potential. *LWT Food Sci. Technol.* 2019, 114, 108421, doi:10.1016/j.lwt.2019.108421.
- Barth-Haas Group The Barth Report Hops 2018/2019. Available online: https://www.barthhaas.com/fileadmin/user_upload/news/2019-07-23/barthreport20182019en.pdf (accessed on 13 April 2020).
- Reinold, M. *Manual pratico de cervejaria*. Aden Ed. Comun. 1997, 1, 1–149.
- Arranz, J.I.; Miranda, M.T.; Sepúlveda, F.J.; Montero, I.; Rojas, C.V. Analysis of drying of brewers' spent grain. *Proceedings* 2018, 2, 1467, doi:10.3390/proceedings2231467.
- Devolli, A.; Shahinasi, E.; Stafasani, M.; Feta, D.; Dara, F. Evaluation of brewery waste and its reduction methods. *Albanian J. Agric. Sci.* 2018, 506–513.
- Lynch, K.M.; Steffen, E.J.; Arendt, E.K. Brewers' spent grain: a review with an emphasis on food and health. *J. Inst. Brew.* 2016, 122, 553–568, doi:10.1002/jib.363.
- Xiros, C.; Christakopoulos, P. Biotechnological potential of brewers spent grain and its recent applications. *Waste Biomass Valorization* 2012, 3, 213–232, doi:10.1007/s12649-012-9108-8.

12. Robertson, J.A.; l'Anson, K.J.A.; Treimo, J.; Faulds, C.B.; Brocklehurst, T.F.; Eijssink, V.G.H.; Waldron, K.W. Profiling brewers' spent grain for composition and microbial ecology at the site of production. *LWT Food Sci. Technol.* 2010, 43, 890–896, doi:10.1016/j.lwt.2010.01.019.
13. Aliyu, S.; Bala, M. Brewer's spent grain: a review of its potentials and applications. *Afr. J. Biotechnol.* 2011, 10, 324–331, doi:10.5897/AJBx10.006.
14. Mussatto, S.I.; Roberto, I.C. Chemical characterization and liberation of pentose sugars from brewer's spent grain. *J. Chem. Technol. Biotechnol.* 2006, 81, 268–274, doi:10.1002/jctb.1374.
15. Pampuro, N.; Dinuccio, E.; Balsari, P.; Cavallo, E. Evaluation of two composting strategies for making pig slurry solid fraction suitable for pelletizing. *Atmos. Pollut. Res.* 2016, 7, 288–293, doi:https://doi.org/10.1016/j.apr.2015.10.001.
16. Zucconi, F.; Forte, M.; Monaco, A.; de Bertoldi, M. Biological evaluation of compost maturity. *Biocycle* 1981, 22, 27–29.
17. Pampuro, N.; Bisaglia, C.; Romano, E.; Brambilla, M.; Pedretti, E.F.; Cavallo, E. Phytotoxicity and chemical characterization of compost derived from pig slurry solid fraction for organic pellet production. *Agriculture* 2017, 7, 1–10, doi:10.3390/agriculture7110094.
18. Larney, F.J.; Hao, X. A review of composting as a management alternative for beef cattle feedlot manure in southern Alberta, Canada. *Bioresour. Technol.* 2007, 98, 3221–3227, doi:10.1016/j.biortech.2006.07.005.
19. Pampuro, N.; Bertora, C.; Sacco, D.; Dinuccio, E.; Grignani, C.; Balsari, P.; Cavallo, E.; Bernal, M.P. Fertilizer value and greenhouse gas emissions from solid fraction pig slurry compost pellets. *J. Agric. Sci.* 2017, 155, 1646–1658, doi:10.1017/S002185961700079X.
20. Agnew, J.M.; Leonard, J.J. The physical properties of compost. *Compost Sci. Util.* 2003, 11, 238–264, doi:10.1080/1065657X.2003.10702132.
21. Bernal, M.P.; Albuquerque, J.A.; Moral, R. Composting of animal manures and chemical criteria for compost maturity assessment. A review. *Bioresour. Technol.* 2009, 100, 5444–5453, doi:https://doi.org/10.1016/j.biortech.2008.11.027.
22. de Bertoldi, M.; Vallini, G.; Pera, A. The biology of composting: a review. *Waste Manag. Res.* 1983, 1, 157–176, doi:10.1016/0734-242X(83)90055-1.
23. Azim, K.; Soudi, B.; Boukhari, S.; Perissol, C.; Roussos, S.; Thami Alami, I. Composting parameters and compost quality: a literature review. *Org. Agric.* 2018, 8, 141–158, doi:10.1007/s13165-017-0180-z.
24. Miller, F.C. Composting as a process based on the control of ecologically selective factors. *Soil Microb. Ecol.* 1992, 18 (3), 515–543.
25. Vallini, G.; Di Gregorio, S.; Pera, A.; Cristina, A.; Cunha Queda, F. Exploitation of composting management for either reclamation of organic wastes or solid-phase treatment of contaminated environmental matrices. *Environ. Rev.* 2002, 10, 195–207, doi:10.1139/a02-008.
26. Sidhu, J.; Gibbs, R.A.; Ho, G.E.; Unkovich, I. Selection of *Salmonella typhimurium* as an indicator for pathogen regrowth potential in composted biosolids. *Lett. Appl. Microbiol.* 1999, 29, 303–307, doi:10.1046/j.1365-2672.1999.00626.x.
27. Romano, E.; Brambilla, M.; Bisaglia, C.; Pampuro, N.; Pedretti, E.F.; Cavallo, E. Pelletization of composted swine manure solid fraction with different organic co-formulates: Effect of pellet physical properties on rotating spreader distribution patterns. *Int. J. Recycl. Org. Waste Agric.* 2014, 3, 101–111, doi:10.1007/s40093-014-0070-2.
28. Pampuro, N.; Preti, C.; Cavallo, E. Recycling pig slurry solid fraction compost as a sound absorber. *Sustainability* 2018, 10, doi:10.3390/su10010277.
29. Partanen, P.; Hultman, J.; Paulin, L.; Auvinen, P.; Romantschuk, M. Bacterial diversity at different stages of the composting process. *BMC Microbiol.* 2010, 10, doi:10.1186/1471-2180-10-94.
30. Insam, H.; de Bertoldi, M. Chapter 3 Microbiology of the composting process. *Waste Manag. Ser.* 2007, 8, 25–48, doi:10.1016/S1478-7482(07)80006-6.
31. Franco-Duarte, R.; Černáková, L.; Kadam, S.; Kaushik, K.S.; Salehi, B.; Bevilacqua, A.; Corbo, M.R.; Antolak, H.; Dybka-Stępień, K.; Leszczewicz, M.; et al. Advances in chemical and biological methods to identify microorganisms—from past to present. *Microorganisms* 2019, 7, 130, doi:10.3390/microorganisms7050130.
32. Poulsen, P.; Møller, J.; Magid, J. Determination of a relationship between chitinase activity and microbial diversity in chitin amended compost. *Bioresour. Technol.* 2008, 99, 4355–4359, doi:10.1016/j.biortech.2007.08.042.
33. He, Y.; Xie, K.; Xu, P.; Huang, X.; Gu, W.; Zhang, F.; Tang, S. Evolution of microbial community diversity and enzymatic activity during composting. *Res. Microbiol.* 2013, 164, 189–198, doi:10.1016/j.resmic.2012.11.001.
34. Wang, X.; Cui, H.; Shi, J.; Zhao, X.; Zhao, Y.; Wei, Z. Relationship between bacterial diversity and environmental parameters during composting of different raw materials. *Bioresour. Technol.* 2015, 198, 395–402, doi:10.1016/j.biortech.2015.09.041.

35. Singh, S.; Nain, L. Microorganisms in the conversion of agricultural wastes to compost. *Proc. Indian Natl. Sci. Acad.* 2014, 80, 473–481, doi:10.16943/ptinsa/2014/v80i2/4.
36. Khidzir, K.M.; Abdullah, N.; Agamuthu, P. Brewery spent grain: Chemical characteristics and utilization as an enzyme substrate. *Malays. J. Sci.* 2010, 29, 41–51, doi:10.22452/mjs.vol29no1.7.
37. Santos, M.; Jiménez, J.; Bartolomé, B.; Gómez-Cordovés, C.; del Nozal, M.. Variability of brewer's spent grain within a brewery. *Food Chem.* 2003, 80, 17–21, doi:10.1016/S0308-8146(02)00229-7.
38. Muthusamy, N. Chemical composition of brewers spent grain—A review. *Int. J. Sci. Environ. Technol.* 2014, 3, 2019–2112.

Retrieved from <https://encyclopedia.pub/entry/history/show/15135>